



800-458-2424
www.rockwoodmfg.com



Door Holder with Stop No. 490


- Material:** Cast brass.
- Finishes:** US26D.
- Other:** Holder base: 2¾"wx2½"h.
Holder projection: 2⅛".
Strike base: 1"wx2"h.
Strike projection: 2".

No.	Fastener	Weight	ANSI A156.16
490	5 ea. #8x 1" OH SMS, 3 ea. plastic anchors; 3 ea. #8-32x 1¼" FH MS	0.8 lbs.	L01291



Automatic Door Holder with Stop No. 491, 491R, 491S

- Material:** Cast brass.
- Finishes:** Available in standard architectural finishes (see page 9).
- Other:** Holder base: 2¾"wx2½"h.
Holder projection: 2⅛".
Strike base: 4"wx2"h.
Strike projection: 1¼".
- Options:** Strike risers available for larger clearances.
- Features:** • For applications requiring door hold-open on a frequent basis.
• Screw hole design allows for precise alignment and then permanent attachment.

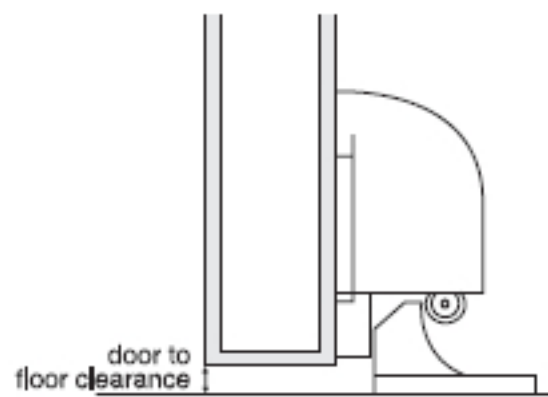

No.	Fastener	Strike	Clearance	Weight	ANSI A156.16
491	Strike: 3 ea. #12x 1¼" FH WS, 3 ea. plastic anchors Body: 4 ea. #10x 1¼" FH WS	Floor	½" or less door to floor	1.5 lbs.	L01301
491R	Strike: 3 ea. 12-24x 1" FH MS, 3 ea. lead anchors Body: 4 ea. #10x 1¼" FH WS	Floor	½" or less door to floor	1.5 lbs.	L01301
491S	Strike: 3 ea. 12-24x 1" FH MS, 3 lead anchors Body: 4 ea. 10-24x 1" FH MS; 4 ea. 10-24x 1⅜" sex bolt	Floor	½" or less door to floor	1.5 lbs.	L01301



Automatic Door Holder with Stop No. 494, 494R, 494S

- Material:** Cast brass.
- Finishes:** Available in standard architectural finishes (see page 9).
- Other:** Holder base: 2¾"wx2½"h.
Holder projection: 2⅛".
Strike base: 2"wx3"h.
Strike projection: 3¼".
- Features:** • For applications requiring door-hold-open on a frequent basis.
• Screw hole design allows for precise alignment and then permanent attachment.

No.	Fastener	Strike	Clearance	Weight	ANSI A156.16
494	Strike: 3 ea. #12x 1¼" FH WS, 3 ea. plastic anchors Body: 4 ea. #10x 1¼" FH WS	Wall	3¾" wall to door	1.7 lbs.	L01291
494R	Strike: 3 ea. #12-24x 1" FH MS, 3 ea. lead anchors Body: 4 ea. #10x 1¼" FH WS	Wall	3¾" wall to door	1.7 lbs.	L01291
494S	Strike: 3 ea. #12-24x 1" FH MS, 3 ea. lead anchors Body: 4 ea. #10-24x 1" FH MS; 4 ea. #10-24x 1⅜" sex bolt	Wall	3¾" wall to door	1.7 lbs.	L01291