



1/4" Diameter Switch With Wire Leads


1055 Series

Applications

- Economical
- Versatile
- Fits in limited space

General Specifications

Enclosure	ABS Plastic
Temperature Range	-40°F to 150°F (-40°C to 65°C)
Environmental	Hermetically Sealed Reed Switch Encapsulated in Polyurethane
NEMA Rating	1, 2, 3, 4, 4x, 5, 6, 12
Protection Class	IP 67
Response Time	1 msec max.
Life Cycles	100,000 Under Full Load, 10,000,000 Under Dry Circuit
Lead Types/O.D.	#22 wire / 0.05" (0.15cm)
Color	Natural
UL/ULC Listed	All Models

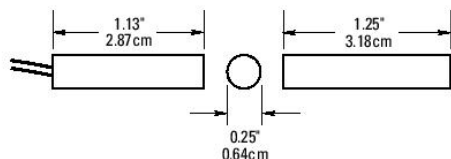

Order Information		Electrical Specifications					
Part Number	Contact ¹ Configuration	Load Rating (AC/DC)	Switching Voltage (AC/DC)	Switching Current (AC/DC)	Contact Resistance	Sense Range ² Nominal	Lead Length
1055-N	N.O.	7.5W/VA	100V	0.5A	0.2 Ohms	0.5" (1.3cm)	1'
1055W-N	N.O.	7.5W/VA	100V	0.5A	0.2 Ohms	1.3" (3.2cm)	1'

Warning— Each electrical rating is an individual maximum and cannot be exceeded!

¹ Configuration with actuator away from the switch

² Proximity of ferrous materials usually reduces sense range — typically by 50%. The shape and type of material cause a wide diversity of effects. Testing is required to determine actual sense range for specific applications.

Gap distances are nominal make distance $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.