

Markar B1921 & B1923 Full Surface Reinforcing Pivots

This full-surface reinforcing pivot adds years of life to openings where the hinges or hinge reinforcements have failed. An economical way to solve door sag problems, reinforcing pivots take the load off the top hinge and transfer it to screws that will not pull out.

Material:

Heavy Duty $\frac{3}{16}$ " (.187) Cold-Rolled Steel

Finish:

Zinc Plated (US2G)

Mounting:

8 ea. $\frac{1}{4}$ -20 x $\frac{3}{4}$ " Phillips flat head machine screws

8 ea. #14 x $1\frac{1}{4}$ " Phillips flat head sheet metal screws

2 ea. $\frac{1}{4}$ -20 x $1\frac{3}{4}$ " Sleeve bolts

Capacity:




Supports Weights up to 300 lbs.

Hole Pattern:

Symmetrically

Handing:

Non-handed

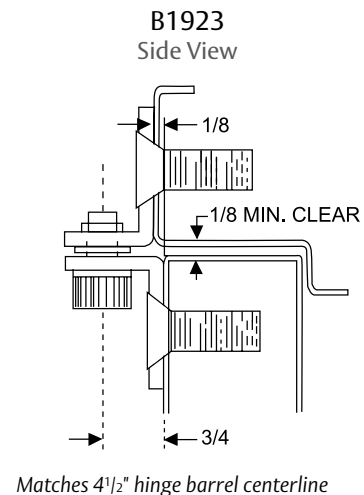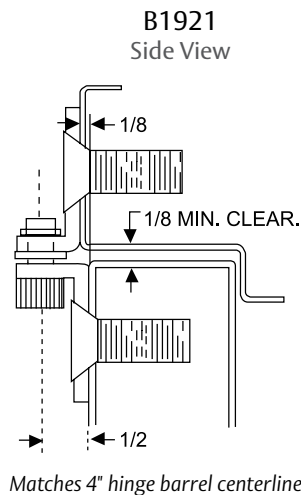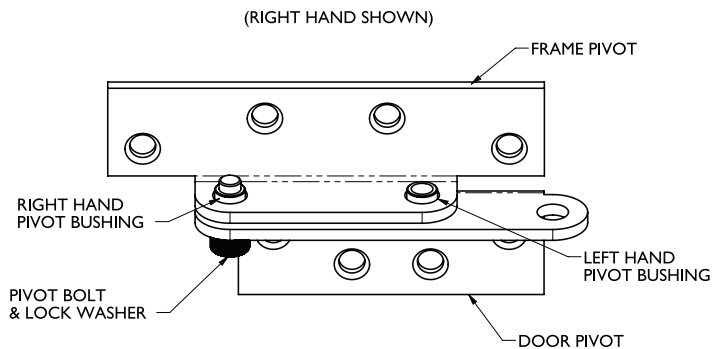

B1921	The B1921 pivot is designed with a $\frac{1}{2}$ " offset to match the pivot point of a 4" wide butt hinge.
B1923	The B1923 pivot is designed with a $\frac{3}{4}$ " offset to match the pivot point of a 4 $\frac{1}{2}$ " wide butt hinge.

ASSA ABLOY

The global leader in
door opening solutions

800-824-3018 | www.markar.com

Check the web site for the up-to-date catalog

Copyright © 2015-2017, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.