





2.4MP HDCVI Bullet Camera with Autofocus and IR

- 1/2.8" 2.4 Megapixel CMOS
- 25/30fps at 1080P, 25/30/50/60fps at 720P
- High speed, long distance real-time transmission over COAX
- 1080P and standard definition switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night (ICR), AWB, AGC, BLC, 3D-DNR
- 2.7~12mm motorized lens with autofocus
- Maximum length of IR LEDs: 30m, Smart IR
- IP67, DC12V
- Outdoor / Indoor

Dimensions (mm)

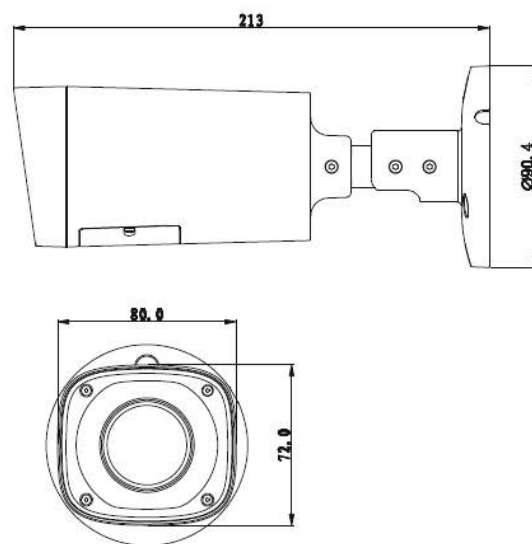

Popular Mounting Solutions

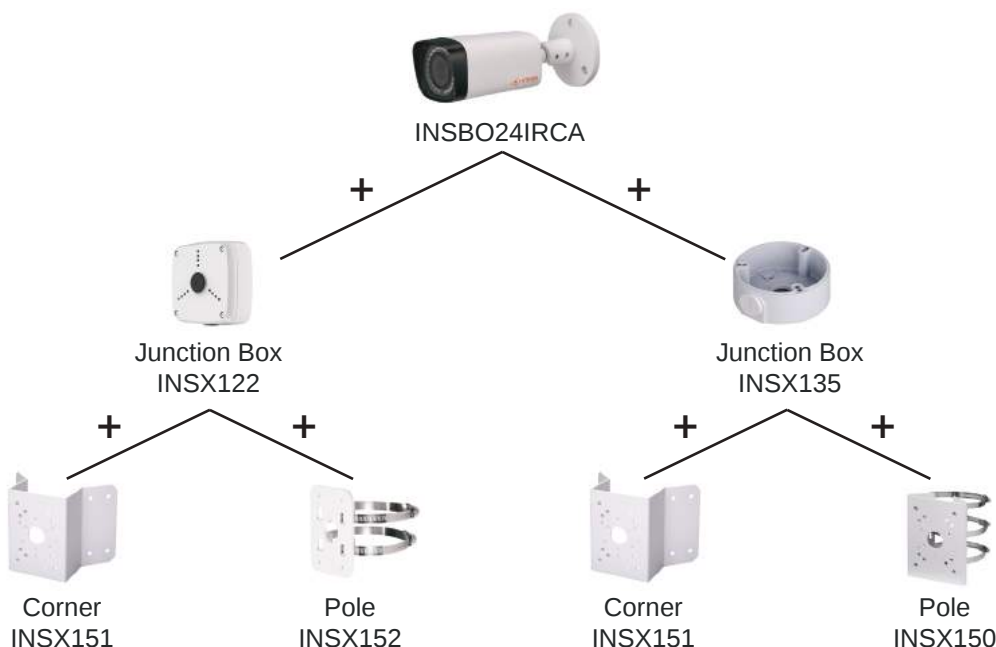

INSBO24IRCA

Product Specifications



Camera	
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984(H) × 1225(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	25/30/50/60fps at 720P; 25/30fps at 1080P
Synchronization	Internal
Minimum Illumination	0.05 Lux at F1.2 (AGC ON), 0 Lux IR on
Video Output	1-channel BNC HDCVI high definition video output / CVBS standard definition video output (Can switch)
Camera Features	
Maximum length of IR LEDs	30m, Smart IR
Day/Night	Auto (ICR) / Color / B/W
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal Length	2.7~12mm
Viewing Angle	H: 105.5°
Lens Type	Motorized / Fixed Iris
Mount Type	14
General	
Power Supply	DC12V±10%
Power Consumption	Maximum 7.5W
Working Environment	-30°C to +60°C / Less than 95% RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP67
Dimensions (W×D×H)	213mm × 80mm × 72mm
Weight	0.55 kg
Material	Metal