


2.4MP 1080P HDCVI Eyeball Camera with IR

- 1/2.8" 2.4 Megapixel CMOS
- 25/30fps at 1080P, 25/30/50/60fps at 720P
- High speed, long distance real-time transmission over COAX
- 1080P and standard definition switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night (ICR), AWB, AGC, BLC, 3D-DNR
- 3.6mm fixed lens
- Maximum length of IR LEDs: 30m, Smart IR
- IP67, DC12V
- Outdoor / Indoor



Dimensions (mm)

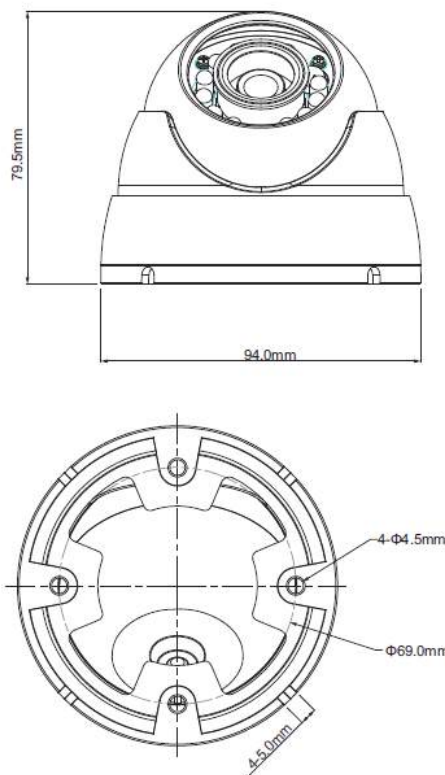

Popular Mounting Solutions



Accessories



Power Supply:
 SW1205-4CB
 SW1205-8CB
 SW1210-8CB
 SW1210-16CB

INSEBO24IRCF

Product Specifications



Camera	
Image Sensor	1/2.8" 2.4 Megapixel CMOS
Effective Pixels	1984(H) × 1225(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	25/30/50/60fps at 720P; 25/30fps at 1080P
Synchronization	Internal
Minimum Illumination	0.05 Lux at F1.2 (AGC ON), 0 Lux IR on
Video Output	1-channel BNC HDCVI high definition video output / CVBS standard definition video output (Can switch)
Camera Features	
Maximum Length of IR LEDs	30m, Smart IR
Day/Night	Auto (ICR) / Color / BW
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal Length	3.6mm fixed
Viewing Angle	H: 88°
Mount Type	M12
General	
Power Supply	DC 12V±10%
Power Consumption	Maximum 3.5W
Working Environment	-30°C to +60°C / Less than 95% RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP67
Dimensions	Φ 94.0mm ×79.5mm
Weight	0.35 kg
Material	Metal