




Features

- 1/3 inch IT CCD
- Ultra High Resolution : 600 TV Lines
- Built-in Fixed Lens (f=3.8mm)
- Min. Illumination : 0.05 Lux
- Auto White Balance
- Smoke Detector Type Dome Housing
- 12VDC

DIMENSIONS

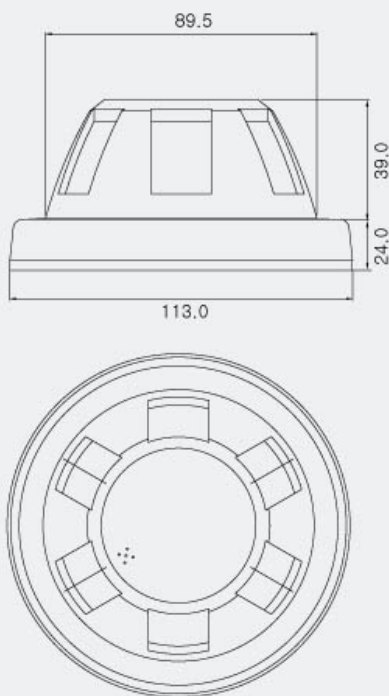

SPECIFICATIONS

Model	DSL-20S
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.734 KHz
Scanning Frequency (V)	59.94 Hz
Image Sensor	1/3 Inch IT CCD
Total Pixels No.	811(H) x 508(V) 410K
Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	600 TV Lines
Video Output	Composite: 1.0V p-p, 75Ω
S/N Ratio	More than 50dB(AGC Off)
Lens	Fixed Lens (f=3.8mm)
Min. Illumination	0.05 Lux
White Balance	Auto
AGC/BLC	Auto
Audio Output Level	1.0Vp-p (75Ω, Composite)
Shutter Speed	1/60~1/120,000 sec.
Supplied Voltage	DC 9V~15V (Recommendation DC±0.5V)
Power Consumption	Less than 150mA
Dimensions (ØxH)	89.5 x 63 mm
Weight	Approx. 157g