

## DETAIL & SUBMITTAL SHEET

WALLS &  
CEILINGS



### SPECIFICATIONS:

**Door:** 14 ga. steel. Trim is 1-1/2" wide


**Frame:** 18 ga. steel having a depth of 1-3/4"

**Hinges:** Fully-concealed hinge up to and including 24 x 24. Allows opening to 165°, **Over 24 x 24 is semi-concealed allowing 180°**


**Latches:** Flush, stainless steel cam latch

**Finish:** Grey baked enamel coat

### FRONT ELEVATION

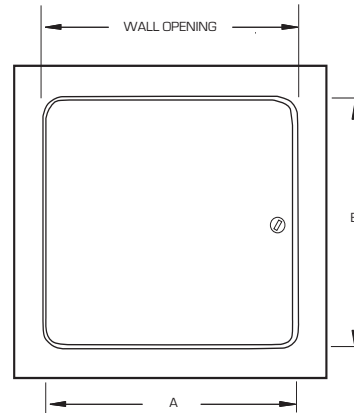

### SECTION DETAIL

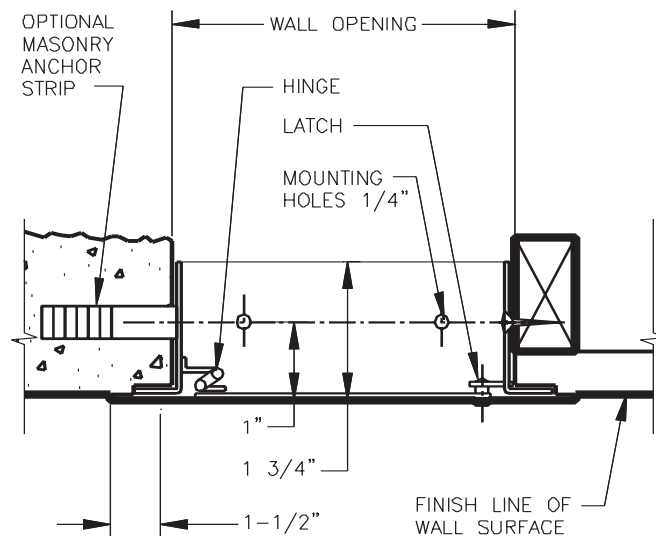

This precision-flush access door for wall and ceiling installation far surpasses other doors because its surround trim is welded on all four sides to the return frame providing strength and rigidity. The frame is laser cut from one sheet of steel for visual aesthetics.

| ✓ | Item No. | Door Size W x H | Wall Opening    | Cam Latch | Ship Wt. Lbs. |
|---|----------|-----------------|-----------------|-----------|---------------|
|   | GP 100   | 6 x 6           | 6 1/4 x 6 1/4   | 1         | 4             |
|   | GP 100   | 8 x 8           | 8 1/4 x 8 1/4   | 1         | 5             |
|   | GP 100   | 8 x 12          | 8 1/4 x 12 1/4  | 1         | 6             |
|   | GP 100   | 8 x 16          | 8 1/4 x 16 1/4  | 1         | 8             |
|   | GP 100   | 10 x 10         | 10 1/4 x 10 1/4 | 3         | 6             |
|   | GP 100   | 12 x 12         | 12 1/4 x 12 1/4 | 3         | 8             |
|   | GP 100   | 12 x 16         | 12 1/4 x 16 1/4 | 3         | 10            |
|   | GP 100   | 12 x 18         | 12 1/4 x 18 1/4 | 3         | 11            |
|   | GP 100   | 12 x 24         | 12 1/4 x 24 1/4 | 4         | 15            |
|   | GP 100   | 14 x 14         | 14 1/4 x 14 1/4 | 3         | 10            |
|   | GP 100   | 16 x 16         | 16 1/4 x 16 1/4 | 3         | 13            |
|   | GP 100   | 16 x 20         | 16 1/4 x 20 1/4 | 3         | 16            |
|   | GP 100   | 16 x 24         | 16 1/4 x 24 1/4 | 4         | 17            |
|   | GP 100   | 18 x 18         | 18 1/4 x 18 1/4 | 3         | 14            |
|   | GP 100   | 18 x 24         | 18 1/4 x 24 1/4 | 4         | 18            |
|   | GP 100   | 18 x 36         | 18 1/4 x 36 1/4 | 5         | 29            |
|   | GP 100   | 20 x 20         | 20 1/4 x 20 1/4 | 3         | 17            |
|   | GP 100   | 20 x 24         | 20 1/4 x 24 1/4 | 4         | 21            |
|   | GP 100   | 20 x 30         | 20 1/4 x 30 1/4 | 4         | 23            |
|   | GP 100   | 22 x 22         | 22 1/4 x 22 1/4 | 4         | 22            |
|   | GP 100   | 22 x 24         | 22 1/4 x 24 1/4 | 4         | 23            |
|   | GP 100   | 22 x 30         | 22 1/4 x 30 1/4 | 4         | 25            |
|   | GP 100   | 22 x 36         | 22 1/4 x 36 1/4 | 5         | 32            |
|   | GP 100   | 24 x 24         | 24 1/4 x 24 1/4 | 4         | 24            |
|   | GP 100   | 24 x 30         | 24 1/4 x 30 1/4 | 4         | 27            |
|   | GP 100   | 24 x 36         | 24 1/4 x 36 1/4 | 5         | 35            |
|   | GP 100   | 24 x 48         | 24 1/4 x 48 1/4 | 6         | 43            |
|   | GP 100   | 30 x 30         | 30 1/4 x 30 1/4 | 6         | 32            |
|   | GP 100   | 30 x 36         | 30 1/4 x 36 1/4 | 6         | 39            |
|   | GP 100   | 32 x 32         | 32 1/4 x 32 1/4 | 6         | 35            |
|   | GP 100   | 36 x 36         | 36 1/4 x 36 1/4 | 7         | 44            |
|   | GP 100   | 36 x 48         | 36 1/4 x 48 1/4 | 8         | 57            |
|   | GP 100   | 48 x 48         | 48 1/4 x 48 1/4 | 12        | 70            |

\* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ Approval Initials: \_\_\_\_\_



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630  
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

[www.wbdoors.com](http://www.wbdoors.com)