

INTUMET™ WS - Wrap Strip

Wrap strip is a highly intumescent firestop material. It expands when exposed to heat and forms a hard char to seal off the annular spaces and prevent the spread of flames and hot gases.


Application:

For plastic and insulated pipe. Tightly wrap the required number of strips around the penetrant to completely fill the annular space.

Size (roll) :

- #WS148 1"(25.4) x 1/4"(6.4) x 8'(2438.4)
- #WS248 2"(50.8) x 1/4"(6.4) x 8'(2438.4)
- #WS128 1"(25.4) x 1/2"(12.7) x 8'(2438.4)

Color: Black



INTUMET™ JS - Joint Strip

Joint Strip is a highly intumescent firestop material used in concrete and masonry control joints up to 1". It forms a strong char that prevents the passage of flame, smoke and hot gases between control joints.


Application:

For curtain wall panels and vertical concrete and masonry construction joint applications.

Size:

- #JS06210008 1/16"(1.6) x 1"(25.4) x 8'(2438.4)
- #JS06215008 1/16"(1.6) x 1 1/2"(38.1) x 8'(2438.4)

Color: Black



INTUMET™ PC - Pipe Collar

Pipe Collar is a prefabricated device for through-penetrations of non-metallic pipes. It contains a heavy-gauge metallic collar filled with pliable intumescent.


Application:

For through penetrations, with plastic pipe

Size:

- #PCC05 1/2"(12.7) nc
- #PCC2 2"(50.8) nom
- #PCC3 3"(76.2) nom
- #PCC4 4"(101.6) nor
- #PCC6 6"(152.4) nor

Color: Silver

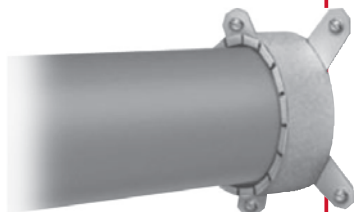

INTUMET™ DPW - Duct & Plenum Wrap

This foil-encapsulated, non-combustible, flexible wrap is used for grease ducts, air ducts and plenum air spaces.

Application:

For through-penetrations, with plastic pipe.

Size:

- #DPW218 1/8"(3.2) x 1 1/2"(38.1) x 2'(609.6)
- #DPW418 1/8"(3.2) x 1 1/2"(38.1) x 4'(1219.2)
- #DPW228 1/8"(3.2) x 2"(50.8) x 2'(609.6)
- #DPW428 1/8"(3.2) x 2"(50.8) x 4'(1219.2)

Supplied in 8 ft. rolls.

Color: Black

INTUMET™ FP - Firestop Pillows

INTUMET FP is a compressible firestop device used for installations where frequent changes may be required. Enclosed in a strong polythelene bag.

Application:

For large openings with cables, cable trays, blank openings

Size:

- #FP294 2"(50.8) x 9"(228.6) x 4"(101.6)
- #FP296 2"(50.8) x 9"(228.6) x 6"(152.4)
- #FP396 3"(76.2) x 9"(228.6) x 6"(152.4)

Color: Fire Red



INTUMET™ EB - Electrical Box Insert

Electrical Box Insert is a highly intumescent, protective pad.

Application:

For use in metallic electrical boxes. Installed in back of the box with PSA tape.

Size:

- #EB248 2"(50.8) x 4"(101.6) x 1/8"(3.2)
- #EB448 4"(101.6) x 4"(101.6) x 1/8"(3.2)
- #EB244 2"(50.8) x 4"(101.6) x 1/4"(6.4)
- #EB444 4"(101.6) x 4"(101.6) x 1/4"(6.4)

50 pads / carton

Color: Fire Red



INTUMET™ CS - Composite Sheet

Soft Puff 3003 intumescent material is laminated during manufacturing to a galvanized steel sheet. The product is reinforced with fire-resistant fiberglass wire mesh to control and direct expansion during fire.


Application:

For penetrations in fire-rated walls and floors, openings in concrete blocks and slabs.

Size: (All material is .3125"(7.9) thick)

- Part# CS1224 12"(304.8) x 24"(609.6)
- Part# CS1628 16"(406.4) x 28"(711.2)
- Part# CS2436 24"(609.6) x 36"(914.4)
- Part# CS2852 28"(711.2) x 52"(1320.8)
- Part# CS3636 36"(914.4) x 36"(914.4)
- Part# CS3641 36"(914.4) x 41"(1041.4)

Color: Grey

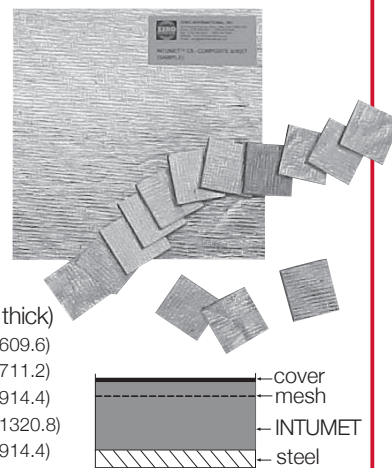

INTUMET™ FS - Firestop Sheet

Highly intumescent firestop material in sheet form for fire blanket.

Application:

Fire blanket for floors and walls, architectural joint systems and others.

- Size: #FS3003-0621296 12"(304.8) x 96"(2438.4) x .062"(1.6)
- #FS3003-1251296 12"(304.8) x 96"(2438.4) x .125"(3.2)
- Expands 20 times
- #FS4004-0621296 12"(304.8) x 96"(2438.4) x .062"(1.6)
- #FS4004-1251296 12"(304.8) x 96"(2438.4) x .125"(3.2)
- Expands 80 times

Color: Red, Black, Grey, Brown, White