


# SUBMITTAL DATA SHEET

## NL Service Fitting – 74760T

T CTS Compression x T CTS Compression x T CTS Compression

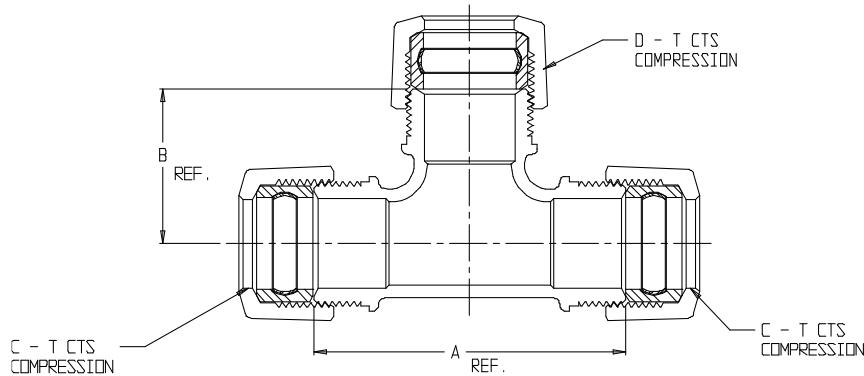

MODEL	SIZE	A	B	C	D
74760T	3/4	3.12	1.56	3/4	3/4
74760T	3/4 X 1	3.76	1.88	3/4	1
74760T	1	3.52	1.76	1	1
74760T	1 X 3/4	3.56	1.67	1	3/4
74760T	1 X 1 1/4	4.36	2.20	1	1 1/4
74760T	1 X 1 1/2	4.36	2.12	1	1 1/2
74760T	1 X 2	5.38	2.55	1	2
74760T	1 1/4	4.20	2.10	1 1/4	1 1/4
74760T	1 1/2	4.24	2.12	1 1/2	1 1/2
74760T	2	5.00	2.50	2	2
74760T	2 X 3/4	4.00	2.38	2	3/4
74760T	2 X 1	4.00	2.38	2	1

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.**  
P.O. Box 508  
Dubuque, IA 52004-508

**Toll Free: 1-800-292-2737**  
**Fax: 1-800-832-9296**  
**Hours: 7:00 a.m. – 5:00 p.m., CST**

sales@aymcdonald.com  
[www.aymcdonald.com](http://www.aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**

08-19