



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors, and roofs



FIRE-RATED

Recessed for drywall walls

FW-5015

Application

- For installation in drywall walls requiring concealing of the door panel consistent to surrounding walls
- For use in Walls, fire-rated for up to 90-minutes with a temperature rise of max 250° C (450° F) over 30 minutes

Product Features

- Recessed reinforced door fitted with 5/8" Fire-rated drywall.
- Concealed hinge & self-centering device ensures seamless appearance in wall
- Self-closing & self-latching door mechanism
- Perforated Frame ensures trouble-free application of skim coat to edge of the door
- Zinc coated steel provides superior corrosion resistance
- Testing standards UL 10(b) and ULC S104

FW-5015 Access Door Specifications:

Door: Steel-22 Gauge recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site

Door Frame: Steel-22 Gauge press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

Hinge: Concealed




Fire Rating (Walls): Meets 1½ hour fire rating requirement in accordance with Underwriters Laboratories UL 10(b) and CAN/ULC S104-10 for max size upto 24" x 36"

Latch: Self-latching bolt, operated by flush key

Finish: Satin coat steel



Drywall insert included

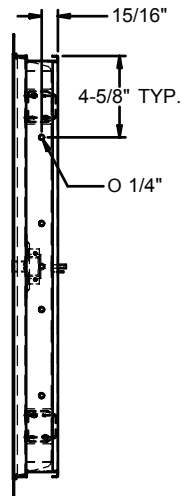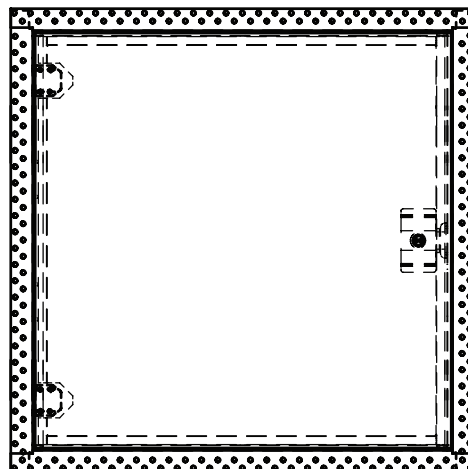

AVAILABLE SIZES (Special sizes available upon request)

NOMINAL DOOR SIZE W X H		WEIGHT PER DOOR		
inches	mm	Latches	lbs.	kg.
12 X 12	305 X 305	1	10	4.5
16 X 16	406 X 406	1	14	6.4
18 X 18	457 X 457	1	18	8.2
24 X 24	610 X 610	1	29	13.1
24 X 36	610 X 914	2	42	19.0

Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

Patent Pending