
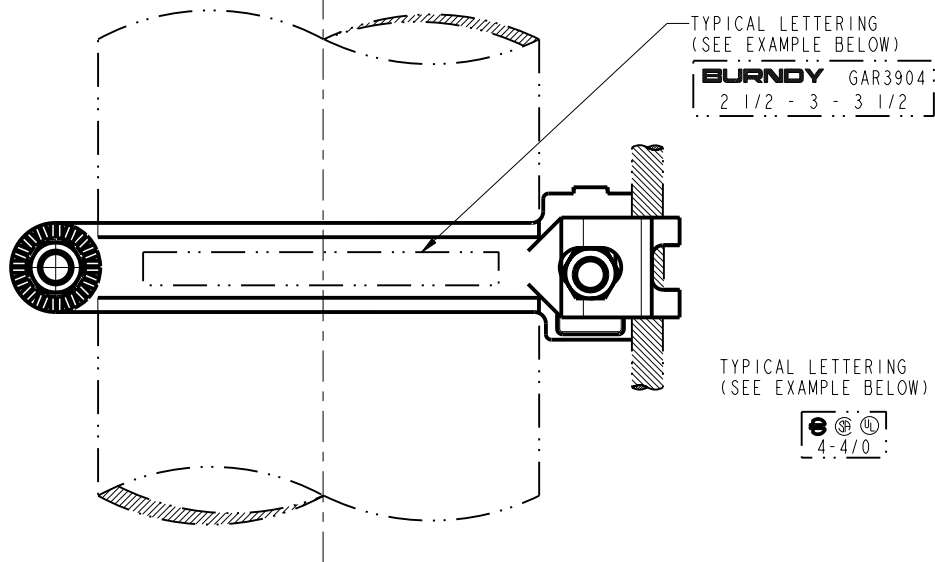


DRAWING NO. SD206396		7		6		5		4		3		2		1	
CATALOG NUMBER	I.P.S. PIPE ACCOMMODATED			COPPER CABLE ACCOMMODATED		H	J	W	RECOMMENDED TIGHTENING TORQUE	REV					
	NOMINAL O.D.	ACTUAL O.D.		AWG	METRIC WIRE SIZE					B	DATE	DESCRIPTION	ECO	BY	C'H'K.
		(in)	[mm]												
GAR3902BU	1/2"-1"	.840-1.32	[22-33]	4 STR(.232)- 4/0 STR(.528)	25mm ² STR[6.6]- 95mm ² STR[12.9]	3.50 [89]	3/8"-16"	3.25 [83]	200 Lb*in [22.5 N*m]						
GAR3903BU	1-1/4"-2"	1.66-2.38	[43-60]			4.00 [102]		4.25 [108]							
GAR3904BU	2-1/2"-3-1/2"	2.88-4.00	[74-101]			6.50 [165]		6.00 [152]							
GAR3905BU	4"-5"	4.50-5.56	[115-141]			7.50 [191]		7.50 [191]							
GAR3906BU	6"	6.62	[168]			8.50 [216]		8.62 [219]							
GAR3907BU	8"	8.62	[218]			10.00 [254]		10.62 [270]							
GAR3908BU	10"	10.75	[273]			12.00 [305]		12.75 [324]							
GAR3909BU	12"	12.75	[323]			14.00 [356]		14.75 [375]							

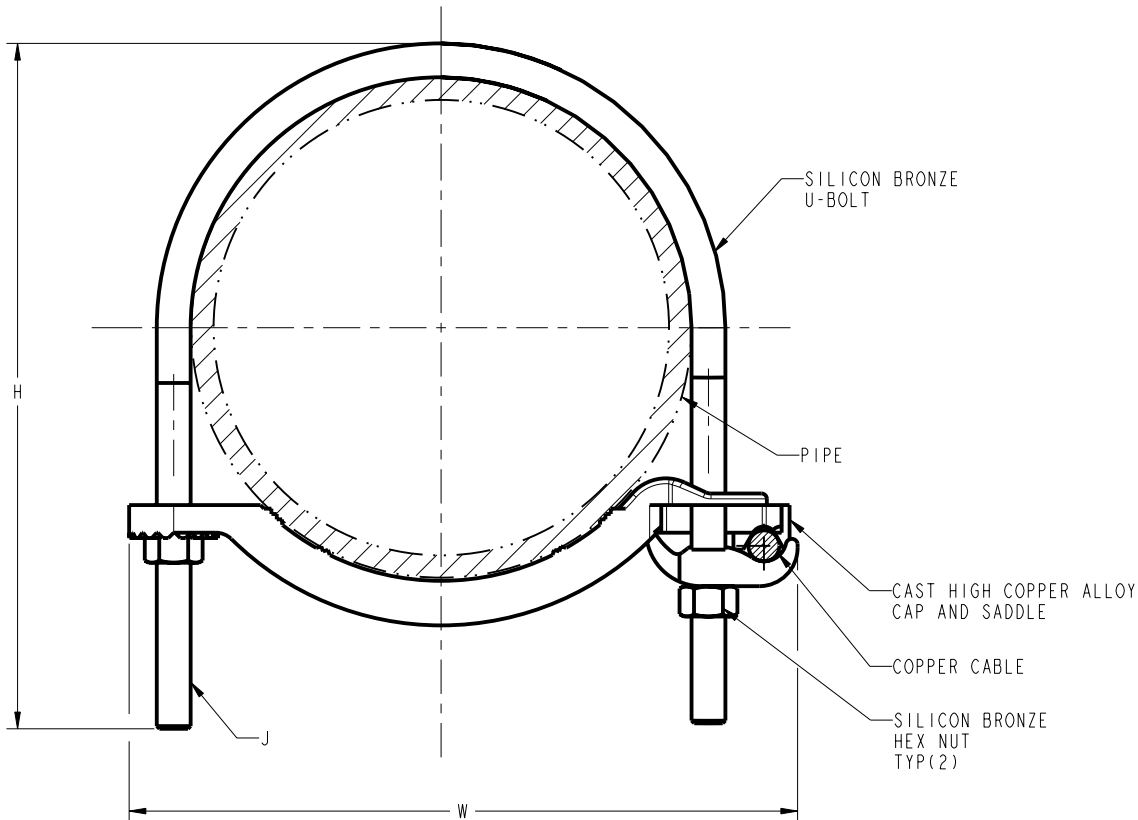

- NOTES:
1. MATERIAL: AS NOTED.
 2. UL 467 LISTED, FILE NO. E9999. ACCEPTABLE FOR DIRECT BURIAL.
 3. CSA C22.2 NO. 65 LISTED, FILE NO. 42862.
 4. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY.
 5. APPLY EVEN COAT OF BURNDY PENETROX™, OXIDE INHIBITING COMPOUND TO PIPE.

TO ORDER BURNDY® PRODUCTS CALL
UNITED STATES
1-800-346-4175 (LONDONDERRY, NH)
CANADA:
1-800-361-6975 (QUEBEC)
1-800-387-6487 (ALL OTHER PROVINCES)
FOR PRODUCT INFO: <http://www.burndy.com>

GAR-BU ASSEMBLY			
ITEM NO:	--		
CAT. NO:	GARBU (TABLE)		
DRAWN BY:	MP	10/03/90	
CHECKER:	KH	11/21/90	
DSN APPVL:	KW	12/04/90	
MFG APPVL:	--	--	
QA APPVL:	AL	11/16/90	
MKT APPVL:	--	--	SCALE: 1:1
PROD FAM:	--	DRAWING NO	REV
PROJECT #:	--	SD206396	B
DOCUMENT TYPE: Sales	SIZE		
REL LEVEL: Released	D	SHEET 1 OF 1	