


PEX DZR Brass Tee

Lead Free

FEATURES

- **Lead-free** – Made from dezincification resistant ECO certified lead-free brass alloy C69300 for exceptional protection against dezincification, stress corrosion, and cracking.
- **Durable** – Able to withstand a maximum temperature of 200°F and a maximum pressure of 200 PSI.
- **Fully-compliant** - Meets ASTM F1807 Specifications for safe and effective use on commercial and residential jobs.
- **Widely Compatible** – May be used with the stainless-steel clamping system or the copper crimp ring system.

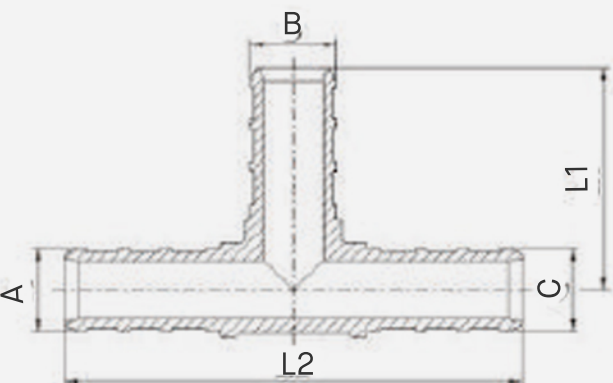

SKU	A	B	C	L1	L2
PXT050-050-075-DZR	.47"	.66"	.47"	.96"	2.12"
PXT075-050-050-DZR	.66"	.47"	.47"	1.06"	1.91"
PXT075-050-075-DZR	.66"	.66"	.47"	1.06"	1.92"
PXT075-075-050-DZR	.66"	.47"	.66"	1.06"	2.11"
PXT075-075-100-DZR	.66"	.85"	.66"	1.24"	2.40"
PXT100-050-075-DZR	.85"	.66"	.47"	1.14"	2.28"
PXT100-075-075-DZR	.85"	.66"	.66"	1.14"	2.26"
PXT100-075-100-DZR	.85"	.85"	.66"	1.34"	2.5"
PXT100-100-050-DZR	.85"	.47"	.85"	1.34"	2.5"
PXT100-100-075-DZR	.85"	.66"	.85"	1.34"	2.5"