


# Hot Water Angle Radiator Valve

(Sweat x Male Union)

## FEATURES

- **C85700 Brass Construction** – Ideal for applications requiring durability, aesthetic appeal, and resistance to water and heat exposure.
- **Rated for Durability** – Carries a 60PSI/250°F pressure/temperature rating to withstand conditions in a wide range of job settings
- **Connection Method:** Sweat (C) x Threaded (MNPT)

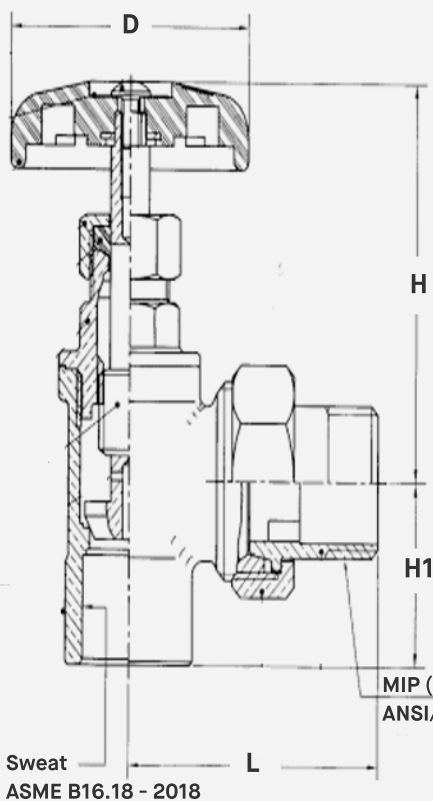

SKU	Size	Dimension					
		D	H	H1	L	Sweat	MIP
RVHWS050	1/2" Sweat x 1/2" MIP	2.26"	2.45"	0.94"	2.12"	0.63"	1/2" - 14NPT
RVHWS075	3/4" Sweat x 3/4" MIP	2.26"	2.45"	1.12"	2.40"	0.87"	3/4" - 14NPT

No	Part	Material	QTY	Water Contact
1	Bolt	Hot Rolled SAE 1010R	1	No
2	Name Plate	Aluminum A1100	1	No
3	Handle	Phenolic	1	No
4	Packing Nut	Brass Rod C37700	1	No
5	Packing	Teflon Polyflon PTFE M-392	1	Yes
6	Bonnet	Cast Brass C85700	1	Yes
7	Stem	Cast Brass C85700	1	Yes
8	Body	Cast Brass C85700	1	Yes
9	Nipple	Forged Brass C37700	1	Yes
10	Packing Nut	Forged Brass C37700	1	No

