


MIP x Inside Sweat Frost-Free Anti Siphon Sillcock (Lead Free)

FEATURES

- **Brass Construction** – C46400 brass alloy includes tin for added corrosion resistance and excellent strength.
- **Chrome Plated Finish** – Makes the spout more corrosion-resistant and more attractive.
- **Rated for Durability** - Able to withstand a maximum operating temperature of 140°F at 125 PSI.
- **Anti-Siphon**
- **Garden Hose Thread Outlet**

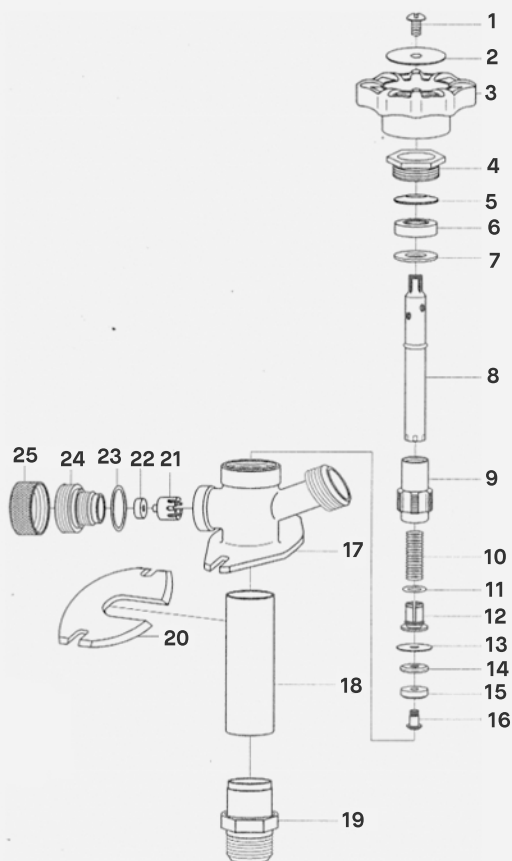

SKU	Size
SK050MC-2AS	1/2" MIP x 1/2" FC x 3/4" MHT x 2"
SK050MC-4AS	1/2" MIP x 1/2" FC x 3/4" MHT x 4"
SK050MC-6AS	1/2" MIP x 1/2" FC x 3/4" MHT x 6"
SK050MC-8AS	1/2" MIP x 1/2" FC x 3/4" MHT x 8"
SK050MC-10AS	1/2" MIP x 1/2" FC x 3/4" MHT x 10"
SK050MC-12AS	1/2" MIP x 1/2" FC x 3/4" MHT x 12"
SK050MC-14AS	1/2" MIP x 1/2" FC x 3/4" MHT x 14"

Number	Part	Material	Water Contact
1	Bolt	Forged Brass C2600	N
2	Name Plate	Aluminum A1100	N
3	Handle	Zinc Z30A	N
4	Bonnet	Brass ROD C37700	N
5	Washer	Stainless Steel 304	N
6	Packing	Rubber (NBR) SN719F	Y
7	Washer	Stainless Steel 304	Y
8	Pipe	Brass (Copper Alloy Nos. 27000)	Y
9	Stem	Brass ROD C46400	Y
10	Spring	Stainless Steel 304	Y
11	O-ring	Rubber (NBR) SN719F	Y
12	Spring Seat	Brass ROD C46400	Y
13	Flapper	Rubber (NBR) SN719F	Y
14	Seat	Forged Brass C26000	Y
15	Seat Packing	Rubber (NBR) SN719F	Y
16	Screw	Forged Brass C26000	Y
17	Body	Cast Brass C46400 MOD	Y
18	Pipe	Brass (Copper Alloy Nos. 27000)	Y
19	Nipple	Brass ROD C46400	Y
20	Packing	POM M90 Formocon FM090 CF500P	N
21	Floating	POM M90 Formocon FM090 CF500P	Y
22	Floating Packing	Rubber (NBR) SN719F	Y
23	O-ring	Rubber (NBR) SN719F	Y
24	Packing	POM M90 Formocon FM090 CF500P	Y
25	Cap	Brass ROD C37700	N