Galvanized Reducing Coupling

Applications:

Designed for residential, commercial, and industrial threaded piping systems. Galvanized malleable iron fittings connect pipe in potable water, air, and general utility applications where added corrosion resistance is desired, subject to applicable codes and system requirements.



Product Feature:

- Class 150 malleable iron construction
- Threaded NPT connections
- 100% pressure tested prior to leaving the factory
- Galvanized zinc coating for added corrosion resistance
- Available in a variety of reducing sizes
- Designed for residential, commercial, and industrial piping systems





Materials:

- Body: Malleable Iron
- Finish: Galvanized Zinc Coating
- Pressure Class: 150
- Connection Type: Threaded NPT

Certifications/Listings/Approvals:

- UL Listed
- FM Approved
- ASTM A197/A197M
- ANSI/ASME A153/A153M
- ANSI/ASME B16.14
- ANSI/ASME B1.20.1
- NSF/ANSI 61
- NSF/ANSI 372


! Note:
A reducing coupling connects two different pipe sizes. The larger female threads (internal threads) receive the larger male pipe or fitting, while the smaller female threads (internal threads) receive the smaller male pipe or fitting, allowing a transition between pipe sizes.

®Bluefin 2026

Product Offerings Designation & Dimensions:

GV	—	C	—	Thread	—	Thread	—	C
BRAND Galvanized		**Product** Coupling		**Size Code** (Larger Size)		**Size Code** (Smaller Size)		**Configuration** Standard

SIZE CODE	NOMINAL SIZE
018	1/8”
025	1/4”
038	3/8”
050	1/2”
075	3/4”
100	1”
125	1-1/4”
150	1-1/2”
200	2”
250	2-1/2”

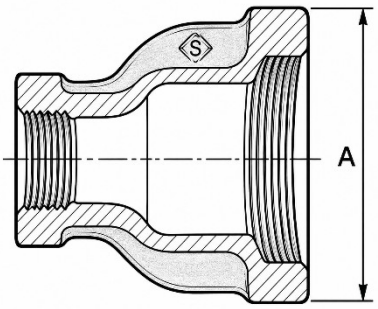

Size (in)	1/4 x 1/8	3/8 x 1/8	3/8 x 1/4	1/2 x 1/8	1/2 x 1/4	1/2 x 3/8	3/4 x 1/4
A	0.58	0.64	0.64	0.75	0.75	0.75	0.85

Size (in)	3/4 x 3/8	3/4 x 1/2	1 x 3/8	1 x1/2	1 x 3/4	1 ¼ x 1/2	1 ¼ x 3/4
A	0.85	0.85	0.85	1.00	1.00	1.00	1.00

Size (in)	1 ¼x 1	1 ½ x 1/2	1 ½ x 3/4	1 ½ x 1	1 ½ x 1 ¼	2 x 1/2	2 x 3/4
A	0.85	0.85	0.85	1.00	1.00	1.00	1.00

Size (in)	2 x 1	2 x 1 ¼	2 x 1 ½	2 ¼ x 2	3 x 2	3 x 2 ½
A	0.85	0.85	0.85	1.00	1.00	1.00

®Bluefin 2026