

## PRODUCT SPECIFICATIONS

Elkay® Universal Filtration Kit (3000-Gallon). Overall dimensions are 5-1/4" x 5-1/4" x 12-1/2".

<b>Special Features:</b>	Filtered
<b>Dimensions:</b>	5-1/4" x 5-1/4" x 12-1/2"
<b>Shipping Weight:</b>	3 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Capacity:</b>	3000 gal. (11356 L)
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** For use with Bottle Fillers, Coolers & Fountains.

- Universal filtration kit works with Elkay® and non-Elkay units to turn any non-filtered bottle filling station into a filtered unit
- Filter should be replaced every 3,000 gallons or 1 year after installation; replace sooner if water delivery unit is located in a high-traffic area in places such as schools and airports
- Equipped with quick-disconnect, 1/4-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed
- Designed to reduce lead, particles and chlorine. Also reduces odors and discoloration from incoming water
- Filter is tested and certified to NSF 42 and 53 for lead, Class 1 particulate, chlorine taste and odor reduction
- Kit includes mounting bracket, tubing and connections for installation

### KIT INCLUDES

- Filter
- Filter head
- Mounting bracket
- 1/4" polytubing
- 3/8" copper tube
- 1/4" quick connect union
- 1/4" quick connect stem elbow

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_



**Included with Product:** 3000 gallon filter, kit components

A Century of Tradition and Quality.



For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



**Product Compliance:** NSF 372 (lead free)  
NSF 42  
NSF 53  
NSF 401



[Installation Instructions \(PDF\) - 98526C](#)

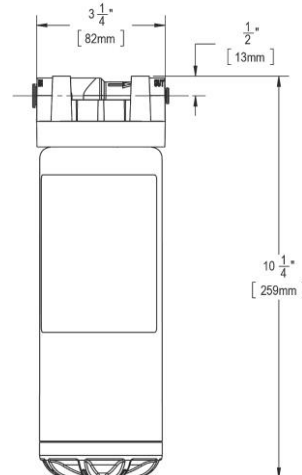

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*