



GENERAL FILTERS
INCORPORATED

Dehumidifiers
Residential Whole-House (GFI #5333 & 5334)

GeneralAire® Models DH75 & DH100 Wi-Fi Dehumidifiers

LCD Touch Screen & Wi-Fi Control

Spec Sheet

Specifications

	DH75	DH100
Capacity	Up To 75 Pints Per 24 Hours @ 80°F / 27°C - 60% RH	Up To 100 Pints Per 24 Hours @ 80°F / 27°C - 60% RH
Control	LCD Touch Screen Display With Wi-Fi	
AFCI Power Cord (meets latest in electric safety standards)	✓	✓
Power Supply	120VAC, 60Hz	120VAC, 60Hz
Energy Factor	2.4 liters/kwh	2.6 liters/kwh
Current Draw	6.6 A	7.8 A
Air Flow	180 CFM	220 CFM
Inlet Air Operating Temperature	50°F - 90°F / 10°C - 32°C	
Control Board Display Temperature	-4°F - 158°F operating / -22°F - 176°F storage -20°C - 70°C operating / -30°C - 80°C storage	
Filter	MERV 11 Pleated Filter GFI #7143 10" x 12" x 1"	MERV 11 Pleated Filter GFI #7144 12" x 12" x 1"
Cabinet Insulation	Foil-faced fiberglass 1/2" thick & closed cell foam	Foil-faced fiberglass 1/2" thick & closed cell foam
Duct Connections	8" Diameter (Inlet & Outlet)	10" Diameter (Inlet & Outlet)
Drain Pan	Heavy Duty, Injection Molded	
Weight	58 Lbs.	65 Lbs.
Dimensions	12.75" H x 12.6" W x 21" D	15.75" H x 12.6" W x 21" D
Noise	Less Than 55 dB (unducted)	
Warranty	 Five Years	



DH75
GFI #5333



DH100
GFI #5334

- Hanging kits available separately
- Low voltage adapter included



AFCI Power Cord

The latest in electrical safety standards!



Tested to ANSI/UL STD 474, and to Can/CSA Std C22.2 No. 92-197 and applicable sections of ANSI/UL STD 1995.



Designed & Assembled
in Michigan, USA

Breathe Healthier



General Filters, Inc.
43800 Grand River Avenue
Novi, Michigan 48375
Toll Free: (866) 476-5101
www.generalaire.com



Canadian General Filters, Ltd.
400 Midwest Rd.
Toronto, ON M1P3A9 Canada
Toll Free: (888) 216-9184
www.cgfproducts.com





GENERAL FILTERS
INCORPORATED


Dehumidifiers
Residential Whole-House (GFI #5333 & 5334)

GeneralAire® Models DH75 & DH100 Wi-Fi Dehumidifiers

LCD Touch Screen & Wi-Fi Control

Spec Sheet

Residential Whole-House Dehumidifier

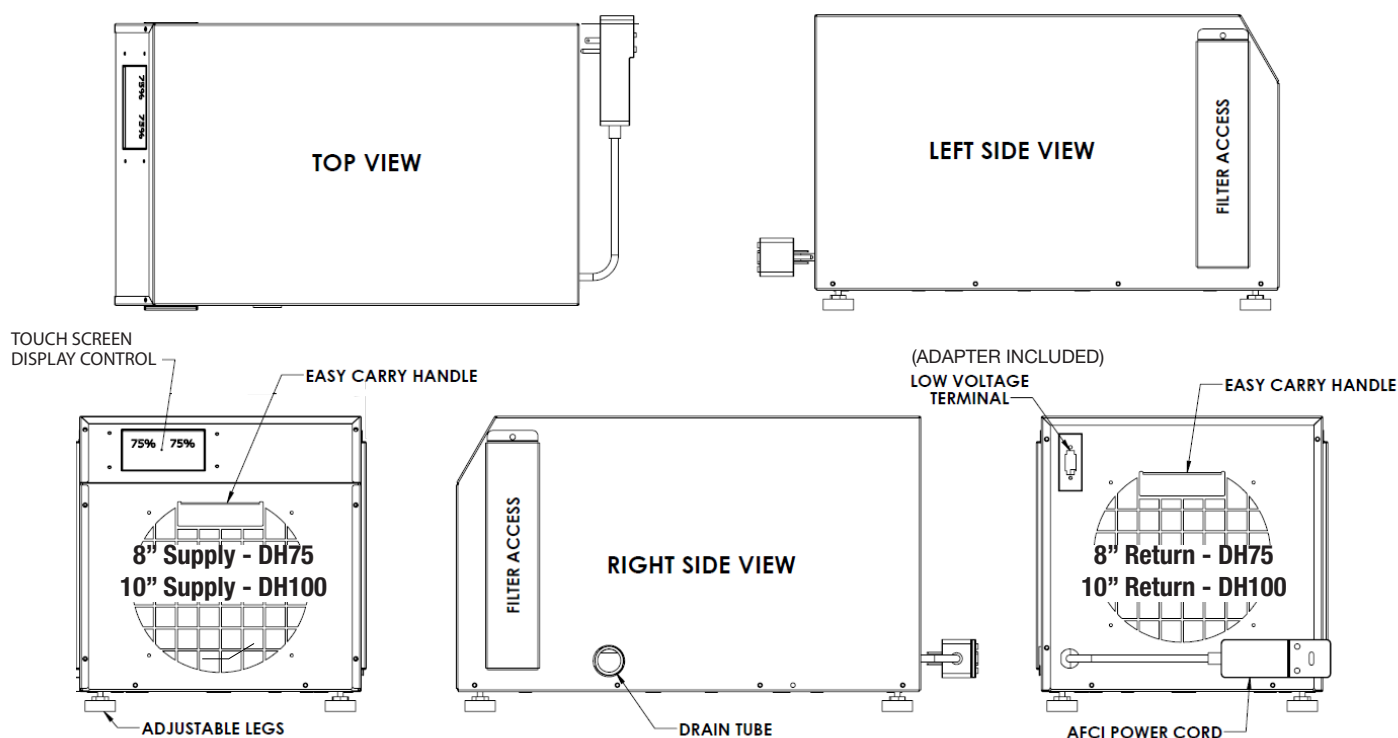

Maintenance


Maintenance of your new GeneralAire® Dehumidifier is minimal:

- Replace the MERV 11 pleated filter once every 6 months.
- Do not operate your dehumidifier without a filter.

GFI #7143
for DH75



GFI #7144
for DH100



See installation manual for instructions on how to download and use the APP.

Breathe Healthier

Our Brands



General Filters, Inc.
43800 Grand River Avenue
Novi, Michigan 48375
Toll Free: (866) 476-5101
www.generalaire.com



Canadian General Filters, Ltd.
400 Midwest Rd.
Toronto, ON M1P3A9 Canada
Toll Free: (888) 216-9184
www.cgfproducts.com

Last Updated: 5-2018

Download online at: www.generalfilters.com/literature/spec/submittal. All information subject to change without notice.

PURE MICHIGAN®