

### Features

- Dual-control wall-mounted
- Lever handles
- Stationary spout
- Less drain
- 6-1/4" (159 mm) 35° spout from wall to center of drain
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Valve sold separately

### Material


- Brass
- KOHLER finishes resist corrosion and tarnishing

### Required Products/Accessories

[K-410-K](#) Wall-mount Valve

### Recommended Products/Accessories

K-23726 Drain treatment  
K-14375 24" Double Towel Bar  
K-14377 Pivoting toilet paper holder  
K-14435 18" Towel Bar  
K-14436 24" Towel Bar  
K-14441 Towel Ring  
K-14443 Robe Hook  
K-14444 Vertical toilet paper holder

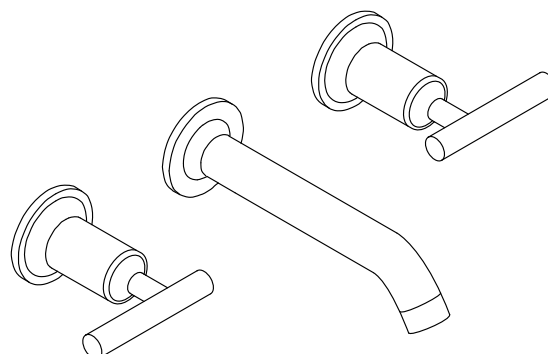

ADA CSA B651 OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description                    |
|-------|------|--------------------------------|
|       | CP   | Polished Chrome                |
|       | SN   | Vibrant® Polished Nickel       |
|       | AF   | Vibrant® French Gold           |
|       | BN   | Vibrant® Brushed Nickel        |
|       | BV   | Vibrant® Brushed Bronze        |
|       | BL   | Matte Black                    |
|       | 2MB  | Vibrant® Brushed Moderne Brass |
|       | BGP  | Vibrant® Brushed Graphite      |


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

8-23-2025 00:50 - US/CA

THE BOLD LOOK  
OF **KOHLER®**

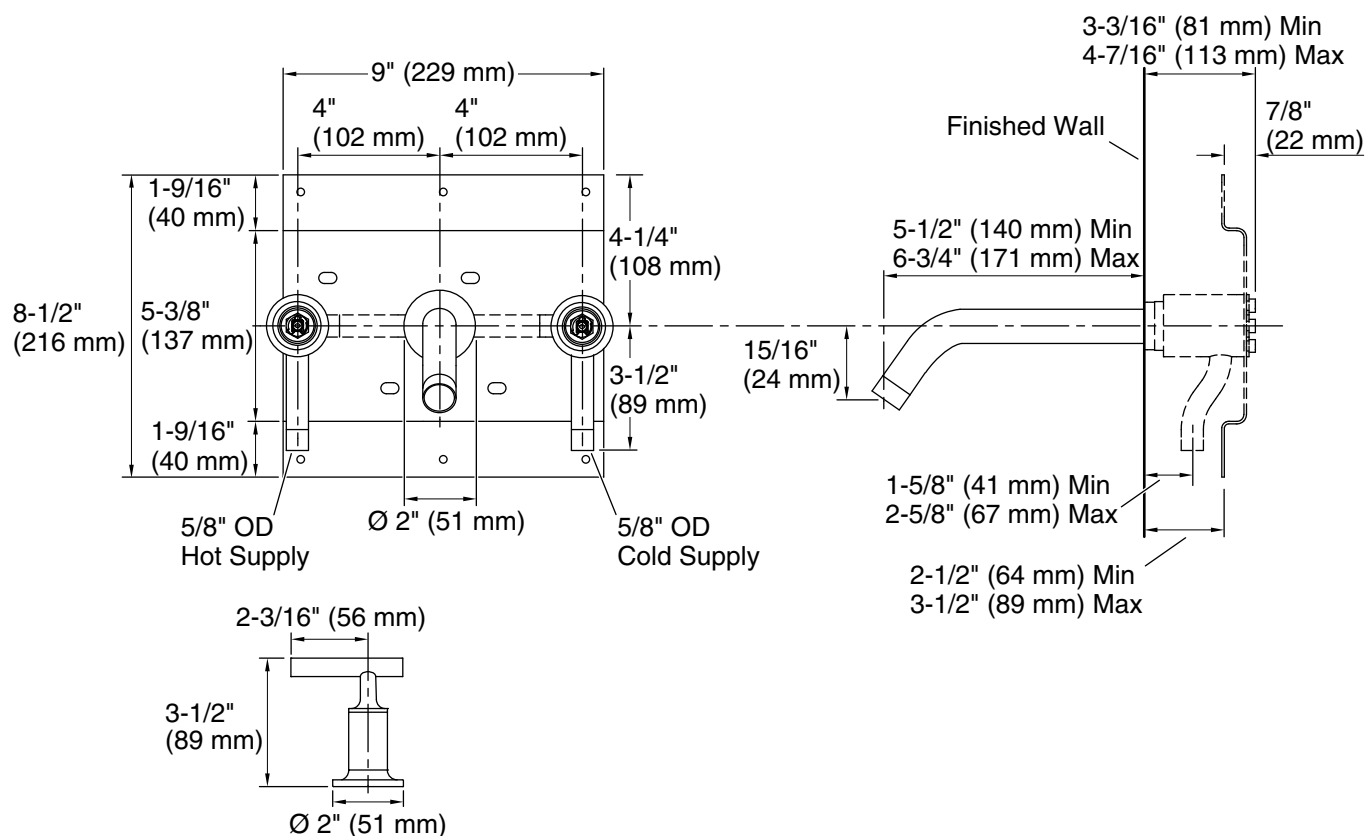

## Technical Information

All product dimensions are nominal.

Faucet flow rate: 1.2 gal/min (4.5 l/min)

## Spout:

Spout reach: 6-3/4" (171 mm)

## Notes

Install this product according to the installation guide.

The distance between the bottom of spout and top of the fixture rim must not be less than 1-1/2" (38 mm) and not greater than 6" (152 mm).

Three 1-1/2" (38 mm) diameter cutout holes are required for spout and handles.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.