




SERVICE PARTS LIST

BULLETIN NO.
54-00-CCKT

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS				REVISED BULLETIN	DATE
Cordless M18™ ForceLogic™ Knockout Tool					Nov. 2021
CAT. NO.	2676-20	SERIAL NUMBER	F75A	WIRING INSTRUCTION	

See
page two
for available
accessories and
applicable die sets,
ball pull, coupler
& quick connect
anvil assy.

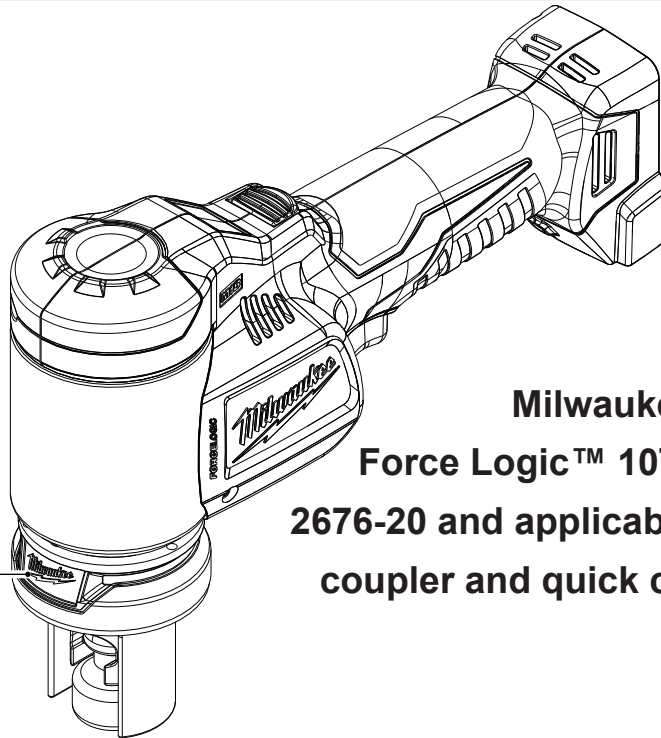

No. 2676-20
M18™ ForceLogic™ Knockout Tool
Shown with optional quick connect
anvil assembly, ball pull and coupler
(See page two)

Milwaukee Tool:
Force Logic™ 10T Knockout Tool
2676-20 and applicable die sets, ball pull,
coupler and quick connect anvil assy.

Due to the combination of hydraulics and electronics in this tool,
service can only be performed at this Milwaukee factory Repair Center:

MILWAUKEE TOOL Central Repair
1401 Sycamore Avenue • Greenwood, MS 38930-7277

Please send your tool directly to this location for service.

Or

Via e-Service at: www.milwaukeetool.com/e-service
questions, please call 1.800.SAWDUST (1.800.729.3878)

Or

Return it to a MILWAUKEE factory Service Center location, freight prepaid and insured.
A copy of the proof of purchase should be included with the return product.








If you have questions please contact Milwaukee Product Service at:

Product Technical Support via phone at: 262.783.8642

Or

Via email at: METProductSupport@milwaukeetool.com

Disassembly is not recommended and could void the warranty.

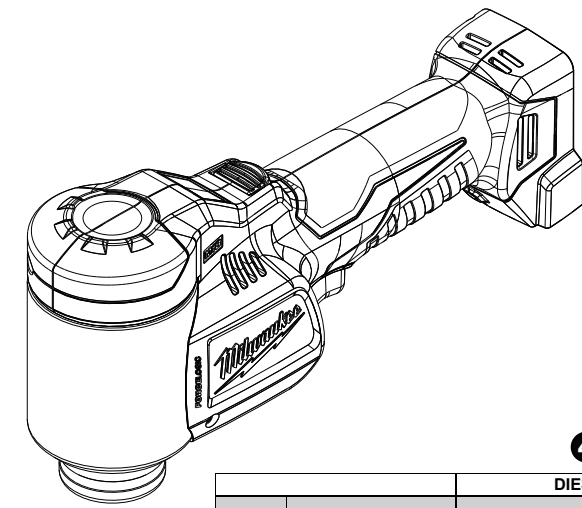

		4		6		5				
		DIES		PUNCHES		DRAW STUDS			CAPACITY	
Conduit Size	Nominal Hole Size	Part Number	Description	Part Number	Description	7/16" 1/2" (13mm) Pilot HoleP	3/4" /8" (22mm) Pilot HoleP	1-1/8" 1-1/4" (32mm) Pilot HoleS	tainless steel	Mild Steel
1/2"	0.885" / (22.5mm)	49-16-2660S	SS 1/2" die	49-16-2661S	SS 1/2" punch	49-16-2680	----	----	12 ga.	10 ga.
3/4"	1.115" / 28.3mm)	49-16-2662	3/4" die	49-16-2663	3/4" punch	----	49-16-2681	----		
1"	1.362" / (34.6mm)	49-16-2664	1" die	49-16-2665	1" punch	----	49-16-2681	----		
1-1/4"	1.701" / (43.2mm)	49-16-2666	1-1/4" die	49-16-2667	1-1/4" punch	----	49-16-2681	----		
1-1/2"	1.951" / (49.6mm)	49-16-2668	1-1/2" die	49-16-2669	1-1/2" punch	----	49-16-2681	----		
2"	2.416" / (61.4mm)	49-16-2670	2" die	49-16-2671	2" punch	----	49-16-2681	----		
2-1/2"	2.914" / (74.0mm)	49-16-2672	2-1/2" die	49-16-2673	2-1/2" punch	----	----	49-16-2682		
3"	3.539" / (89.9mm)	49-16-2674	3" die	49-16-2675	3" punch	----	----	49-16-2682		
3-1/2"	4.044" / (102.7mm)	49-16-2676	3-1/2" die	49-16-2677	3-1/2" punch	----	----	49-16-2682		
4"	4.544" / (115.4mm)	49-16-2678	4" die	49-16-2679	4" punch	----	----	49-16-2682	14 ga.	12 ga.
5"	5.665" / (143.9mm)	49-16-2686	5" die	49-16-2687	5" punch	----	----	49-16-2707 Ø 1-1/8" - long		
6"	6.748" / (171.4mm)	49-16-2689	6" die	49-16-2688	6" punch	----	----			

1 No. 42-86-0050
Quick Connect
Anvil Assembly

2 No. 42-90-0020
Coupler

3 No. 42-90-0010
Ball Pull

No. 42-55-2676
Blow Molded Case (not shown)

No. 12-20-2637
Service Nameplate (not shown)

No. 10-20-1047
Warning Label (not shown)

No. 49-16-2685
Adaptor For Milwaukee power unit to
competitor dies and punches (not shown)

No. 49-16-2684
EXACT™ Adaptor For competitor power units
to EXACT™ 2-1/2" to 4" dies (3/4" studs)
(not shown)