



FLANGE X FEMALE • WITH PURGE

Features

- Includes Gaskets and Nuts
- Vinyl Grip Lever Handle with Optimal T-Handle Included
- Purge Drain with Mini Vinyl Grip Lever Handle
- Heavy Duty Rust Resistant Brass Body
- Blow Out Proof Stem Design
- PTFE Seats and Seals
- Full Port

Specifications & Approvals

Ends Comply With ANSI.B.20.1, ANSI.B.16.18
400 psi WOG 150 psi WSP Service

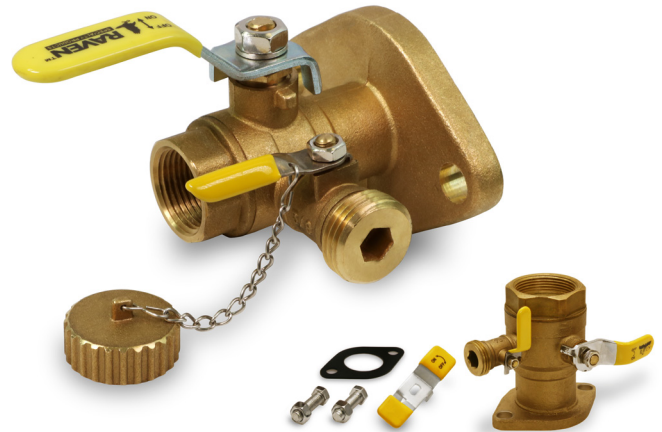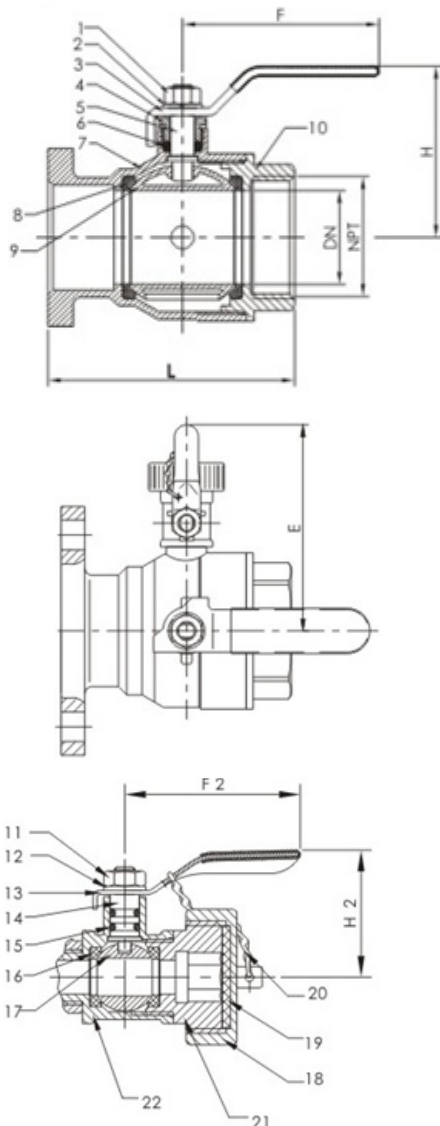

Dimensions (mm)

Part #	Size	DN	L	H	F	E	F2	H2
895T034	3/4"	19	78.20	53.50	77	72.50	41	29.50
895T001	1"	25	86.50	57.50	77	77.00	41	29.50
895T114	1-1/4"	29	88.00	61.50	77	80.50	41	29.50
895T112	1-1/2"	37	97.20	67.00	77	87.00	41	29.50

Material Specifications

Part Name	Material
1. Nut	Steel
2. Lockwasher	Steel
3. Handle	Steel w/ chrome or zinc alloy
4. Gland Nut	ASTM B124
5. Stem	ASTM B124
6. Stem Packing	PTFE
7. Body	ASTM B124
8. Seat Ring	PTFE
9. Ball	ASTM B124
10. Bonnet	ASTM B124
11. Nut	Steel
12. Lockwasher	Steel
13. Handle	Steel w/ chrome or zinc alloy
14. Stem	ASTM B124
15. O-Ring	NBR
16. Seat Ring	PTFE
17. Ball	ASTM B124
18. Locking Cover	ASTM B124
19. Rubber Pad	NBR
20. Chain	ASTM B124
21. Bonnet	ASTM B124
22. Body	ASTM B124