

RIDGID

DIAGNOSTICS & DRAIN CLEANING

PRODUCT CATALOG



BUILT FOR THOSE WHO KNOW[®]

When you work in the skilled trades, you leave your mark on every job you touch. Your reputation is built over time. Day by day, job by job.

When it's your name on the line, make sure our name is on your tool. For more than 100 years, we've built our legacy the same way you have — one job at a time. We make tools that stand up to the toughest challenges and last long enough for you to pass them down to the next generation. We deliver a better way to work.

It's more than our promise. We guarantee it.



TABLE OF CONTENTS



8

HAND TOOLS



14

SINK MACHINES



18

DRUM MACHINES



26

SECTIONAL MACHINES



34

CABLES AND CABLE TOOLS



38

FLEXSHAFT[®] MACHINES



48

WATER JETTERS



54

CAMERA REELS



71

DIGITAL REPORTING MONITORS



77

HAND-HELD INSPECTING



81


UTILITY LOCATING

RIDGID® GIVES YOU THE COMPETITIVE EDGE.

THE MOST INNOVATIVE SYSTEM IN THE INDUSTRY

When problems are lurking in pipe, behind walls, or anywhere underground, more professionals choose RIDGID drain cleaning, diagnostics, and locating than any other brand. That's because RIDGID sets the industry standard for ease of use, durability, and advanced functionality. Give your clients the best possible outcomes with the industry's most comprehensive line of drain cleaning and diagnostic tools. Purpose-built for everything from residential to industrial jobs, these tools have the durability and versatility you need.




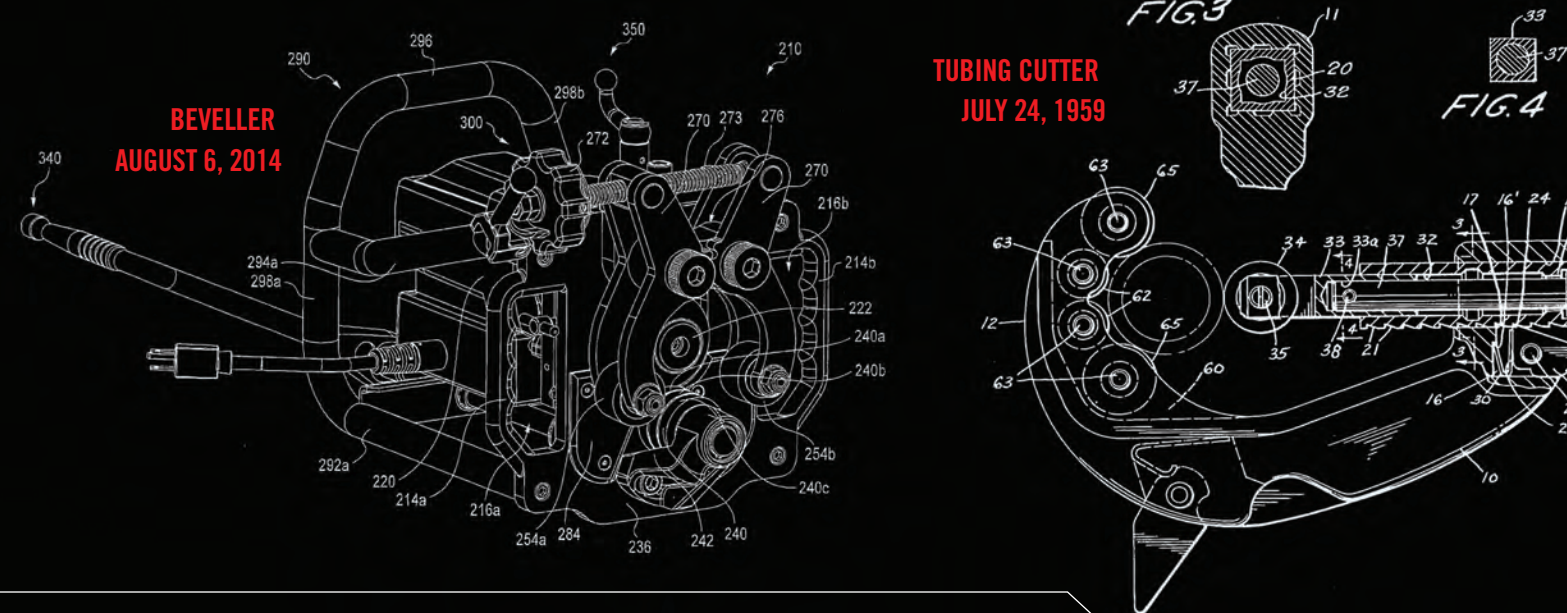


THE BEST NEVER REST.

With more than 100 patents already secured and more on the way, RIDGID® continues to deliver a better way to work. Every diagnostic and drain cleaning product is purpose-built based on feedback from the field. This history of field-driven innovation – coupled with the industry’s best lifetime warranty – makes RIDGID the most trusted brand for trade professionals all around the world.



PIPE WRENCH MAY 26, 1922

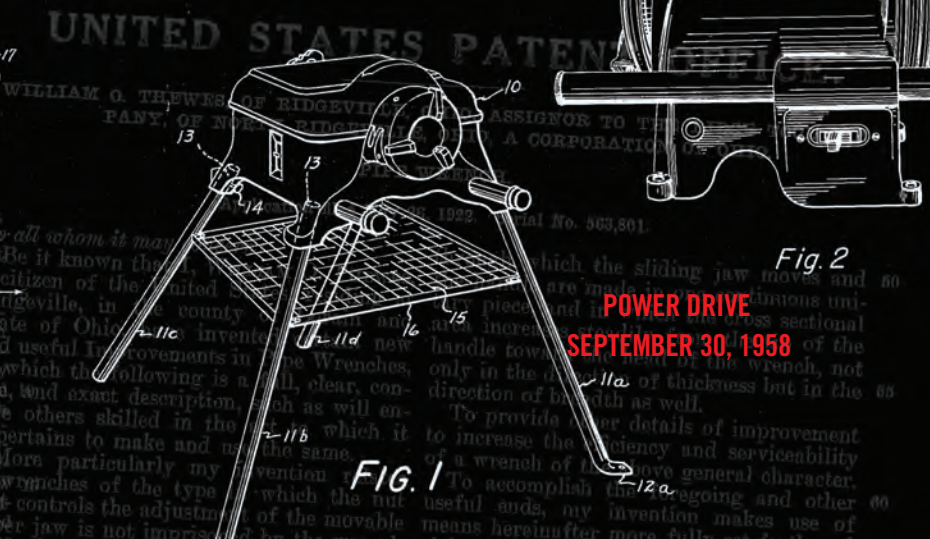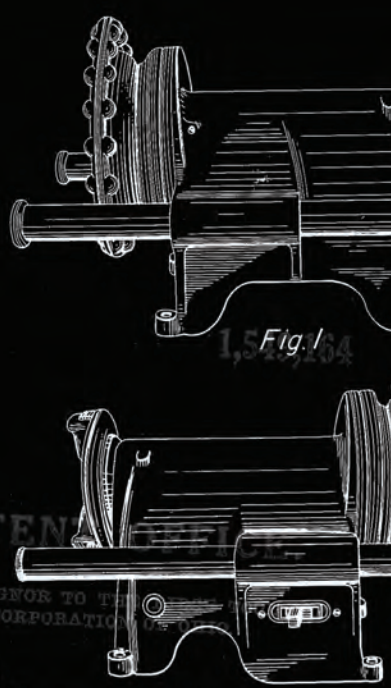

HAND TOOLS

EASILY CLEAR OBSTRUCTIONS IN TOILETS AND DRAIN LINES

RIDGID® hand tools use durable, kink-resistant cables to clear toilet and urinal blockages, as well as sink and shower obstructions in lines ranging from 3/4" to 2" (19 to 50 mm). Ergonomically designed, these tools are fast, effective, and easy to use.

- KEY FEATURES**
- | DURABLE, KINK-RESISTANT CABLES**
- | ERGONOMIC DESIGNS**
- | DUAL POWER OPTIONS**



Drill not included

K1-HYBRID URINAL AUGER

DUAL-POWERED OPERATION FOR TOUGH URINAL CLOGS

The K1-Hybrid Urinal Auger is the all-in-one solution for pipe sizes up to 2". Its dual power operation adds versatility, while its telescoping design helps you reach obstructions further down the line. The "C" cutter head breaks up hard blockages, and a left-hand wound cable helps prevent kinking.

- ▶ PIPE SIZE**
Up to 2" (50 mm)
- ▶ CABLE SIZE**
3/8" x 4' (10 mm x 1.2 m)
- ▶ KEY FEATURES**
Manual or Drill Powered
"C" cutter aggressively removes hard or soft blockages
Vinyl sleeve helps protect porcelain
Telescoping design ideal for urinal and shower drains
Corrosion-resistant tube protects cable

CATALOG NO.	MODEL NO.	DESCRIPTION
46683	K-1	4' (1.2m) Hybrid Urinal Auger
74993	N/A	Toilet Auger Bag



K-3 TOILET AUGER

EASY CLEARING FOR TOUGH TOILET CLOGS

The K-3 toilet auger features large, ergonomically designed handles for greater control. The K-3 can navigate water-conserving toilets while the vinyl sleeve protects the porcelain.

- ▶ CABLE SIZE**
1/2" x 3' (13 mm x 1 m) compression-wrapped Inner Core Cable
- ▶ KEY FEATURES**
Vinyl sleeve helps protect porcelain
Large, ergonomically designed handles
Perfect for water-conserving toilets
Bulb auger for all-purpose cleaning

CATALOG NO.	MODEL NO.	DESCRIPTION
59787	K-3	3' (1 m) Toilet Auger with Bulb Head
74993	N/A	Toilet Auger Bag

DRAIN CLEANING HAND TOOLS



Drill not included



K-6P HYBRID TOILET AUGER


DUAL POWERED OPERATION FOR TOUGH TOILET CLOGS

The K-6P hybrid toilet auger uses a heavy-duty Inner Core cable to power through the toughest blockages. The optional drill attachment lets you increase the speed to 500 RPM while the quick lock adjustment extends the cable beyond the toilet. Zinc-plated steel tubing helps resist corrosion and preserve your tool while the vinyl sleeve protects the porcelain.

- ▶ **OPTIONAL DRILL ATTACHMENT**
Powers through serious blockages with 500 RPM maximum
- ▶ **QUICK LOCK ADJUSTMENT**
Extends the cable ½" × 6' (130 mm × 1.8 m) to clear beyond the toilet
- ▶ **CORROSION-RESISTANT**
Zinc-plated steel tubing protects cable
- ▶ **MAXIMUM STRENGTH**
Heavy-duty Inner Core cable
Bulb auger for all-purpose cleaning
- ▶ **DROP HEAD AUGER (OPTIONAL MODEL)**
Helps navigate back to back plumbing fixtures

CATALOG NO.	MODEL NO.	DESCRIPTION
56658	K-6P	6' (1.8 m) Hybrid Toilet Auger with Bulb Head
59802	K-6 DH	6' (1.8 m) Toilet Auger with Drop Head
74993		Toilet Auger Bag



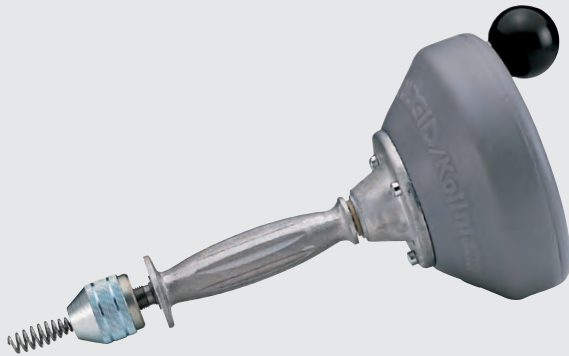

K-25 HAND SPINNER

CLEARs 3/4" TO 2" (19 TO 50 MM) DRAIN LINES

The RIDGID® K-25 has been a favorite of professionals for decades. Its precision-machined, 3-jaw chuck keeps the cable secure while a simple flick of the wrist releases the cable. With a sturdy cast aluminum ribbed hand grip and a rotary molded plastic drum that won't dent or rust, this spinner works through traps and bends in sinks, tubs, drinking fountains, lavatories, urinals, and vent pipes.

▶ **MULTIPLE HEADS**

- Bulb head for all-purpose cleaning
- Drop head helps navigate back-to-back plumbing fixtures

▶ **KINK-RESISTANT CABLES**

- 25' of vinyl-wrapped inner core 5/16" cable (8 mm × 7.6 m)

▶ **PROFESSIONAL GRADE**

- Precision machined, 3-jaw chuck with flick-of-the-wrist release
- Cast aluminum ribbed hand grip reduces slippage
- Rotary molded plastic drum won't dent or rust and cleans easily

CATALOG NO.	MODEL NO.	DESCRIPTION
58890	K-25-BP	Hand Spinner w/ C-11C Bulb Auger Cable
58895	K-25-DH	Hand Spinner w/ C-21C Drop Head Cable



K-26 HAND SPINNER

CLEARs 3/4" TO 2" (19 TO 50 MM) DRAIN LINES

The RIDGID K-26 hand spinner delivers outstanding performance and value. A slip-resistant collet chuck firmly grips the cable with a flick of the wrist. The rotary molded plastic drum cleans easily while resisting rust and dents.

▶ **CABLE SIZE**

- 5/16" × 25' (8 mm × 7.6 m) hollow core cable with bulb head auger

▶ **OPEN DRUM DESIGN**

- Provides access to cable

▶ **KEY FEATURES**

- Slip-resistant collet chuck grips with the flick-of-the-wrist
- Rotary molded plastic drum won't dent or rust and cleans easily

CATALOG NO.	MODEL NO.	DESCRIPTION
59812	K-26	Hand Spinner w/ C1 Bulb Head Cable



EZ SPIN™ DRAIN SNAKE

NEW

CLEARs ¾" TO 2" (19 TO 50 MM) DRAIN LINES

The patented AUTOFEED® self-feeding technology allows you to keep your hands clean, and off the cable, by automatically advancing and retrieving the cable. The ¼" x 25' MAXCORE cable is made of high-strength, kink-resistant cable, and reaches farther blockages in up to 2" drain lines. The lightweight design and grip handle provide user comfort and stability while cleaning, allowing you to rest the handle directly on the sink counter. Simply squeeze the trigger and turn the drum to start clearing the blockage.

▶ **FAST PIPE NAVIGATION**

New, improved AUTOFEED technology automatically feeds and retracts cable, allowing you to keep your hands clean and off the cable

▶ **EXTENDED REACH**

¼" x 25' high-strength, kink-resistant MAXCORE cable reaches far, hard-to-reach blockages

▶ **TOUGH ON BLOCKAGES**

Equipped bulb auger breaks up stubborn blockages such as hair, soap scum, and soft debris

▶ **EASY HANDLING**

Ergonomic grip handle makes it easier to support the tool while feeding the cable
Speed bump feature prevents accidental cable pullout

CATALOG NO.	MODEL NO.	DESCRIPTION
80168	EZ SPIN	EZ Spin Drain Snake





POWER SPIN+ WITH AUTOFEED®

CLEAR 3/4" TO 2" (19 TO 50 MM) DRAIN LINES

The patented AUTOFEED self-feeding technology automatically advances and retracts the cable, allowing you to keep your hands clean and off the cable. For tough clogs, switch to drill powered operation for up to 500 RPM of drain cleaning power. POWER SPIN+ with AUTOFEED is great for use in tubs, sinks, and showers.

▶ **AUTOFEED SELF-FEEDING TECHNOLOGY**

Pull the trigger and turn the drum for a clean drain while keeping your hands clean

▶ **OPTIONAL DRILL ATTACHMENT**

Switch to drill-powered operation for up to 500 RPM of cable speed

▶ **CABLE SIZE**

1/4" x 25' (6 mm x 7.6 m) kink-resistant MAXCORE cable

▶ **CLEAN DRAIN. CLEAN HANDS.**

Speed bump feature prevents accidental cable pullout

Lightweight polyethylene drum will not dent or rust and allows for easy cleaning



Drill not included

CATALOG NO.	MODEL NO.	DESCRIPTION
57043	POWER SPIN+	POWER SPIN w/ AUTOFEED



SINK MACHINES

BIG POWER FOR SMALL LINE BLOCKAGES

RIDGID® sink machines are the professional's choice for clearing small line blockages in lavatories, sinks, tubs, and showers. With a variety of cable sizes and cutter head options, RIDGID sink machines can clear lines ranging from ¾" to 3" (19 to 76 mm). Lightweight and easily transported, these professional-grade drain cleaners excel in cramped, hard-to-reach spaces.

KEY FEATURES

- | SMALL LINE CLEARING
- | PATENTED AUTOFEED® TECHNOLOGY
- | PERFECT FOR TIGHT SPACES

RIDGID

DRAIN CLEANING SINK MACHINES

APPLICATION CHART



	POWERCLEAR	K-45	K-46
APPLICATION:	SINK / SHOWER LINES		
LINE SIZE:	¾" - 2"	¾" - 3"	¾" - 3"
SPEED:	450 RPM	600 RPM	560 RPM
POWER:	CORDED	CORDED	18V BATTERY
WEIGHT:	12 lb	16 lb	15 lb
CABLE SIZE:	¼" W/ HOSE EXTENSION	¼", ⅝", ¾"	¼", ⅝", ¾"
CABLE CAPACITY:	30 ft	25-50 ft	25-50 ft
CATALOG #:	120 V: 55808 220-240 V: 59143	120 V: 36018, 36013, 36023, 36028 220-240 V: 36048, 36053, 36058	NA: 78048, 78053, 78058 INTERNATIONAL: 78063, 78068, 78073, 78078, 78083, 78088

CABLES FOR SINK MACHINES

	POWERCLEAR	K-45
PRODUCTS:		K-46
CABLE DIAMETER:	¼" Cable (6 mm Cable)	¼", ⅝" & ¾" Cable (6 mm, 8 mm & 10 mm Cable)
AVAILABLE LENGTHS:	30'	25' - 35' - 50' (7.6 m - 10.7 m - 15.2 m)
CABLE TYPE:	Inner Core (IC)	Inner Core (IC), Hollow Core (HC)

Inner Core Cables Compression-wound for strength, it also resists kinking and navigates tough bends and traps. Good flexibility while delivering more cleaning power to cable end.

Hollow Core Cables Provides maximum flexibility for severe bends and traps.



POWERCLEAR® DRAIN CLEANING MACHINE

CLEARs ¾" TO 2" (19 TO 50 MM) DRAIN LINES

Powerful, compact, and simple to use. The RIDGID® PowerClear machine breaks through tub, shower, or sink blockages with ease. AUTOFEED® Technology lets you advance and retrieve the cable without getting your hands dirty. And, the heavy-duty inner core cable is purpose-built and kink-resistant. Clear drum helps you know how much cable has advanced down the drain.

- ▶ **AUTOFEED TECHNOLOGY**
Advance and retrieve cable without handling
- ▶ **CLEAR COVER**
Lets you see how much cable remains
- ▶ **HEAVY-DUTY INNER CORE CABLE**
Long-lasting and kink resistant ¼" cable
- ▶ **TWO-PIECE GUIDE HOSE**
Covers cable and protects sink fixtures from accidental damage
- ▶ **CLEANING**
Drain plug and removable drum allows for easy cleaning

CATALOG NO.	MODEL NO.	DESCRIPTION
55808	PowerClear	Drain Cleaning Machine
55983	PowerClear	¼" x 30' (6 mm x 9 m) Replacement Cable

800.769.7743

RIDGID.COM/SINKMACHINES

DRAIN CLEANING SINK MACHINES



T-250 Tool Set Includes: T-203 Bulb Auger
T-205 "C" Cutter
T-210 Spade Cutter
T-217 Drop Head Auger
A-13 Pin Key



K-45 SINK MACHINE

CLEAR 3/4" TO 3" (19 TO 76 MM) DRAIN LINES

The RIDGID® K-45 sink machine effectively opens clogged lavatory, sink lines, urinals, tubs, and shower drains. Available in two styles - Manual feed and AUTOFEED® - its variable speed power unit rotates the cable 0 to 600 RPM. Multiple cable diameters, cable lengths, and cutter heads available depending on your application.

- ▶ **AUTOFEED TECHNOLOGY**
Automatically advances and retrieves the cable
- ▶ **VARIABLE SPEED POWER**
280 W motor spins cable up to 600 RPM
- ▶ **TWO-PIECE TWIST LOCK DRUM**
Inner drum mitigates cable flipover and makes cable changeout fast and simple
- ▶ **MULTIPLE CABLE OPTIONS**
1/4" (6 mm) cables for 3/4" to 1 1/2" (19 to 38 mm) lines
5/16" (8 mm) cables for 3/4" to 2" (19 to 50 mm) lines
3/8" (10 mm) cables for 1 1/4" to 3" (32 to 76 mm) lines*

CATALOG NO.	MODEL NO.	DESCRIPTION
36018	K-45	Machine with: C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum
36013	K-45-1	Machine with: C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum and C-6429 Carrying Case
36023	K-45-5	Machine with: C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum, C-6, 3/8" × 35' (10 mm × 11 m) Cable w/Inner Drum, T-250, Five-Piece Tool Set for 3/8" (10 mm) Cable and C-6429 Carrying Case
36028	K-45-7	Machine with: C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum, C-6, 3/8" × 35' (10 mm × 11 m) Cable w/Inner Drum, C-21, 5/16" × 50' (8 mm × 15 m) Cable w/Inner Drum, T-250, Five-Piece Tool Set for 3/8" (10 mm) Cable and C-6429 Carrying Case
35473	K-45AF	Machine with: AUTOFEED, C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum
35998	K-45AF-1	Machine with: AUTOFEED, C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum and C-6429 Carrying Case
36003	K-45AF-5	Machine with: AUTOFEED, C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum, C-6, 3/8" × 35' (10 mm × 11 m) Cable w/Inner Drum, T-250, Five-Piece Tool Set for 3/8" (10 mm) Cable and C-6429 Carrying Case
36008	K-45AF-7	Machine with: AUTOFEED, C-11C, 5/16" × 25' (8 mm × 7.6 m) Inner Core Cable w/Inner Drum, C-6, 3/8" × 35' (10 mm × 11 m) Cable w/Inner Drum, C-21, 5/16" × 50' (10 mm × 15 m) Cable w/Inner Drum, T-250, Five-Piece Tool Set for 3/8" (10 mm) Cable and C-6429 Carrying Case

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com

*3/8" C-6 & C-61C cables can change cutter heads such as bulb augers, "C" cutters, spade cutters, drophead augers and more.

NEW

K-46 CORDLESS SINKSNAKE™

CLEAR 3/4" TO 3" (19 TO 76 MM) DRAIN LINES

Powered by the RIDGID 18V Advanced Lithium Battery Platform, the K-46 Cordless SinkSnake provides cordless freedom for professional daily use. Designed with ergonomics and versatility at its core, the K-46 features an integrated, multi-position kickstand for support, a 360-degree rotatable AUTOFEED® that advances and retrieves the cable in forward and reverse, an enclosed rotating drum, and compatibility with different cable sizes and cable tools for unmatched convenience.

▶ CORDLESS FREEDOM

Powered by the RIDGID 18V battery platform

▶ MULTI-POSITION KICKSTAND

Integrated kickstand alleviates the weight of the tool in common work environments

▶ BRUSHLESS DC MOTOR

Clears tough blockages in 3/4" to 3" lines such as sinks, tubs, showers and urinals

▶ AUTOFEED TECHNOLOGY

360-degree rotatable AUTOFEED advances and retrieves the cable

▶ VERSATILE

Compatible with 1/4", 5/16" & 3/8" diameter cables up to 50 ft in length, as well as multiple cable tools such as dropheads, spades and c-cutter augers

▶ CONVENIENT

Fully enclosed rotating drum protects plumbing fixtures from accidental damage
Top-mounted LED light illuminates dark work spaces



T-250 Tool Set Includes: T-203 Bulb Auger
T-205 "C" Cutter
T-210 Spade Cutter
T-217 Drop Head Auger
A-13 Pin Key

CATALOG NO.	MODEL NO.	DESCRIPTION
78048	K-46	K-46 Cordless SinkSnake with 5/16" x 25 IC Cable
78053	K-46	K-46 Cordless SinkSnake with 5/16" x 25 IC Cable, 18V 2.5Ah Battery & Charger
78058	K-46	K-46 Cordless SinkSnake with 5/16" x 25 IC Cable, 3/8" x 35' Cable, T-250 Tool Set, Carrying Case, 18V 2.5Ah Battery & Charger

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
78093	—	Replacement Kickstand
78098	—	Carrying Case
78103	—	Inner Drum
78133	—	C-6 Upgrade Kit with 3/8" x 35' Cable, T-250 Tool Set & Inner Drum

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com





DRUM MACHINES

TOUGH ON BLOCKAGES. EASY ON YOU.







RIDGID® drum machines combine high torque, long-running motors with durable cables, and cutter heads to clear blockages in lines ranging from ¾" up to 10" (19 mm to 254 mm). Containing the cable within the drum maximizes cable life while keeping jobsites cleaner.

KEY FEATURES

- | HIGH TORQUE**
- | SUPERIOR MOBILITY**
- | AUTOFEED® TECHNOLOGY**
- | PATENTED CABLE CONTROL SYSTEM**

RIDGID

DRAIN CLEANING DRUM MACHINES

APPLICATION CHART						
	K-400	K-3800	K-750R	K-750	K-7500	K-4310 FXP™
APPLICATION:	SINK / SHOWER LINES					
	FLOOR / SECONDARY DRAINS					
			LATERAL / MAIN LINES			
LINE SIZE:	1½" - 4"	¾" - 4"	3" - 6"	3" - 8"	3" - 10"	3" - 10"
SPEED:	170 RPM	240 RPM	200 RPM	200 RPM	200 RPM	230 RPM
HORSEPOWER:	½ HP	½ HP	½ HP	½ HP	½ HP	¾ HP
WEIGHT:	60 lb	65 lb	194 lb	234 lb	272 lb	237 lb
CABLE SIZE:	¾", ½"	¼", ⅜", ⅝", ½"	⅝"	⅝", ¾"	⅝", ¾"	⅝", ¾"
CATALOG #:	120 V: 52363, 26993, 26998, 27008, 27013 220-240 V: 27043, 27033, 28103, 28098	120 V: 53107, 53112, 53117, 53122, 53127 220-240 V: 59462, 63827, 63822	120 V: 83557	120 V: 41977, 51402, 42002, 42007, 42012, 47047 220-240 V: 44202, 51407, 44212, 44217	120 V: 59562, 61102, 60052, 60062R 220-240 V: 61542, 61522	120 V: 73048, 73073, 73003, 73008

*Includes largest cable size

CABLES FOR DRUM MACHINES

PRODUCTS:	K-400		K-3800		K-750R		K-750, K-7500, & K-4310 FXP	
	CABLE DIAMETER:	¾" and ½" Cable (10 and 13 mm Cable)		¾" and ½" Cable (10 and 13 mm Cable)		⅝" Cable (16 mm Cable)		¾" Cable (19 mm Cable)
AVAILABLE LENGTHS:	50' - 75' - 100' (15 m - 23 m - 30 m)		50' - 75' - 90' - 100' (15 m - 23 m - 28 m - 30 m)		25' - 50' - 75' - 100' (7.6 m - 15 m - 23 m - 30 m)		25' - 50' - 75' - 100' (7.6 m - 15 m - 23 m - 30 m)	
CABLE TYPE:	Integral Wound (IW)		Inner Core (IC), Integral Wound (IW), Hollow Core (HC)		Heavy-Duty Inner Core (HD), Inner Core (IC), Hollow Core (HC)		Heavy-Duty Inner Core (HD), Inner Core (IC), Hollow Core (HC)	

Inner Core Cables Compression-wound for strength, it also resists kinking and navigates tough bends and traps. Good flexibility while delivering more cleaning power to cable end.

Integral Wound Core Cables Cable is wound tight on wire inner core, creating a solid assembly. Has greater kink resistance.

Hollow Core Cables Provide maximum flexibility for severe bends and traps.

Heavy-Duty Cables Cable is wound tight on wire inner core for excellent stiffness under load.

DRAIN CLEANING DRUM MACHINES



K-400 DRUM MACHINE

CLEARs 1½" TO 4" (38 TO 102 MM) DRAIN LINES

The sleek design and user-friendly features make the K-400 an ideal drum machine for drain cleaners, service plumbers, facility and institutional maintenance departments, and property management companies.

- ▶ **INTEGRATED TRANSPORT CART**
Heavy-duty wheels traverse uneven ground or stairs
- ▶ **FOLD-OVER HANDLE**
Fold-over capability allows for easy transport and storage
- ▶ **PATENTED CABLE CONTROL SYSTEM**
Drum stops spinning when torque limit is reached to reduce risk of cable flipover inside the drum
- ▶ **SOLID CORE CABLE**
Rugged and kink-resistant ¾" or ½" (10 or 13 mm) Integral Wound (IW) solid core cable
- ▶ **AUTOFEED® TECHNOLOGY**
Patented, automatic cable feed powers cable in and out of the drain (available as an accessory - Catalog No. 26773)
- ▶ **CABLE OPTIONS**
¾" × 100' (10 mm × 30 m) cable for 1½" to 3" (38 to 76 mm) lines
½" × 75' (13 mm × 23 m) cable for 2" to 4" (76 to 102 mm) lines



CATALOG NO.	MODEL NO.	DESCRIPTION
52363	K-400 w/C-32 IW	Machine w/Gloves & Std. Equipment: C-32 IW ¾" × 75' (10 mm × 23 m) Solid Core (Integral Wound) Cable and T-260 Tool Set
26993	K-400 w/C-31 IW	Machine with Gloves & Std. Equipment: C-31 IW ¾" × 50' (10 mm × 15 m) Solid Core (Integral Wound) Cable and T-260 Tool Set
26998	K-400 w/C-45 IW	Machine with Gloves & Std. Equipment: C-45 IW ½" × 75' (13 mm × 23 m) Solid Core (Integral Wound) Cable and T-260 Tool Set
27008	K-400 AF w/C-32 IW	Machine with Gloves & Std. Equipment: AUTOFEED, C-32 IW ¾" × 75' (10 mm × 23 m) Solid Core (Integral Wound) Cable and T-260 Tool Set
27013	K-400 AF w/C-45 IW	Machine with Gloves & Std. Equipment: AUTOFEED, C-45 IW ½" × 75' (13 mm × 23 m) Solid Core (Integral Wound) Cable and T-260 Tool Set
26773	K-400 AF Assembly	AUTOFEED Assembly for 1½" - 4" Drains and Pipes

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com



T-260 Tool Set
A-13 Pin Key
T-202 Bulb Auger
T-205 "C" Cutter
T-211 Spade Cutter

K-3800 DRUM MACHINE

CLEARs 3/4" TO 4" (19 TO 102 MM) DRAIN LINES

Powerful, easy to transport, and versatile, the K-3800 is great for clearing sink lines, floor drains, and roof vents. The rugged, corrosion-resistant drum won't dent or rust, while an inner drum reduces risk of cable flipover inside the drum. Hinged design allows for angling the drum to access tricky to reach drain line openings.



► **UNIVERSAL MOTOR**

230 W, 240 RPM universal motor for professional daily use

► **PORTABILITY**

Cable drum's quick release allows for easy cable change and transport

► **CAPACITY**

Standard drum capacity is 3/8" of 100' (10 mm of 30 m) or 1/2" of 90' (13 mm of 28 m) continuous length cable

► **CABLE SIZE**

3/8" (10 mm) cable is best for 1 1/2" to 3" (38 to 76 mm) lines up to 100' (30 m)
1/2" (13 mm) IC cable is best for 2" to 4" (51 to 102 mm) lines up to 90' (28 m)

► **SINK OPTIONS**

Optional sink drum holds 5/16" or 1/4" (6 or 8 mm) cable up to 50' (15 m) – ideal for cleaning 3/4" to 1 1/2" (19 to 38 mm) sink traps

► **ADJUSTABLE FRAME**

Machine can be angled and locked into position for better positioning to drain access



CATALOG NO.	MODEL NO.	DESCRIPTION
53107	K-3800	Machine with Gloves
53112	K-3800 w/C-31	K-3800 Machine with: C-31, 3/8" x 50' (10 mm x 15 m) Cable, T-202 Bulb Auger, T-205 "C" Cutter, T-211 Spade Cutter and A-13 Pin Key
53117	K-3800 w/C-32	K-3800 Machine with: C-32, 3/8" x 75' (10 mm x 23 m) Cable, T-202 Bulb Auger, T-205 "C" Cutter, T-211 Spade Cutter and A-13 Pin Key
53122	K-3800 w/C-45	K-3800 Machine with: C-45, 1/2" x 75' (13 mm x 23 m) Cable, T-102 Funnel Auger, T-142 Knife Blade Cutter, T-107 Spade Cutter and A-12 Pin Key
55007	A-381	Sink Drum Assembly
55017	–	Transport Cart
60087	A3800PF	AUTOFEED® Assembly

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com



DRAIN CLEANING DRUM MACHINES



K-750 DRUM MACHINE

CLEAR 3" TO 8" (76 TO 203 MM) DRAIN AND SEWER LINES

The RIDGID® K-750 is a powerful, self-contained drum machine that's ideal for clearing lateral lines. Balanced design gives the machine a lightweight feel while transport wheels make loading on and off the truck easier.

► **RECOMMENDED CABLES**

- 5/8" (16 mm) cable for 3" to 6" (76 to 152 mm) drain lines
- 3/4" (19 mm) cable for 4" to 8" (102 to 203 mm) drain lines

► **AUTOFEED® TECHNOLOGY**

- Advance and retrieve cable up to 20' (6 m) per minute
- Adjust for either 5/8" or 3/4" (16 or 19 mm) cable with a twist of a screwdriver

► **SERIOUS STORAGE**

- Drum holds 3/4" x 100' (19 mm x 30 m) or 5/8" x 125' (16 mm x 38 m) cable

CATALOG NO.	MODEL NO.	DESCRIPTION
41977	K-750	Machine with Gloves and AUTOFEED - 3/4" (19 mm) Pigtail
51402	K-750	Machine with Gloves and AUTOFEED - 5/8" (16 mm) Pigtail
42002	K-750 with C-75	Machine with One Pair of Gloves, AUTOFEED, Standard 3/4" (19 mm) Tool Set, and: C-75, 3/4" x 75' (19 mm x 23 m) Cable
42007	K-750	Machine with One Pair of Gloves, w/C-100 AUTOFEED, Standard 3/4" (19 mm) Tool Set, and: C-100, 3/4" x 100' (19 mm x 30 m) Cable
42012	K-750 with C-27	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" (16 mm) Tool Set, and: C-27, 5/8" x 75' (16 mm x 23 m) Cable
47047	K-750 with C-24	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" (16 mm) Tool Set, and: C-24, 5/8" x 100' (16 mm x 30 m) Cable

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com



K-750R DRUM MACHINE

CLEAR 3" TO 6" (76 TO 152 MM) DRAIN LINES

The RIDGID K-750R drum machine is ideal for clearing roots, debris, and foreign objects from main lines, storm drains, house laterals, and leach lines. Its narrow design makes it easy to get through small entryways. Minimal setup along with a large blade assortment make this a perfect fit for tough mainline work.

► **CABLE CONTROL SYSTEM**

- Drum stops spinning when torque limit is reached to reduce risk of cable flipover inside the drum

► **CLEAR VIEWING**

- Open drum allows visibility for cable inspection and to understand how much cable is in the drain

► **BALANCED DESIGN**

- Dual kickstands for stability during operation

CATALOG NO.	MODEL NO.	DESCRIPTION
83557	K-750R	5/8" (16 mm) Open Cage Drum Machine with 5/8" x 100' (16 mm x 30 m) IW Solid Core Cable; 2", 3", 4" "C" Cutters; P-Trap Cutter; Spade Blade; Tool Box; Gloves

K-7500 DRUM MACHINE

CLEARs 3" TO 10" (76 TO 254 MM) DRAIN LINES

The RIDGID K-7500 drum machine is the definition of heavy-duty. Its powerful – yet surprisingly quiet – 600 W universal motor spins cables at 200 RPM, making it an ideal solution for tough obstructions like roots. Narrow enough to fit through most bathroom doors, the K-7500 also features a two-position stair climber and adjustable handles for ease of transport and loading.

► **CABLE CONTROL**

Inner-drum and ball bearing distributor arm work in tandem with motor and gearbox system to reduce risk of cable flipover inside the drum

► **AUTOFEED® TECHNOLOGY**

Grease fittings and an open design make for easy maintenance
AUTOFEED advances and retrieves cable up to 22' (6.7 m) per minute

► **TRANSPORT ASSIST**

Two-position stair climber eliminates extra cost for loading wheels



CATALOG NO.	MODEL NO.	DESCRIPTION
59562	K-7500	Machine with 3/4" (19 mm) Pigtail and Standard Accessories
60052	K-7500 w/C-100	Machine, Standard Accessories, and 3/4" x 100' (19 mm x 30 m) Inner Core Cable.
60062	K-7500 w/C-75	Machine, Standard Accessories, and 3/4" x 75' (19 mm x 23 m) Inner Core Cable.
61102	K-7500	Machine with 5/8" (16 mm) Pigtail and Standard Accessories

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com



**DRAIN CLEANING
DRUM MACHINES**

POWERS THROUGH THE TOUGHEST JOBS



BRUSHLESS
DC MOTOR

CABLE COUNTER

FXP
TECHNOLOGY PLATFORM
BATTERY-POWERED

QUICK-CHANGE DRUM

AUTOFEED®
TECHNOLOGY

INTEGRATED TRANSPORT
CART W/ TREADS AND
STAIR CLIMBERS

INTRODUCING THE RIDGID® K-4310 FXP™ DRUM MACHINE

K-4310 FXP DRUM MACHINE

CLEARs 3" TO 10" (76 TO 254 MM) DRAIN LINES

The RIDGID® K-4310 FXP™ Drum Machine is RIDGID's most powerful drum machine, delivering best-in-class performance. Powered by the FXP Technology platform, this battery-powered tool provides cordless freedom and powerful performance. The Cable Counter gives real-time feedback, measuring cable distance in 3" to 10" lines on residential and commercial jobs, making this a valuable addition to your truck.

▶ PERFORMANCE

RIDGID's most powerful drum machine features a Brushless DC Motor and spins up to 230 RPM

▶ POWER

FXP Battery provides cordless freedom, powerful performance and up to 2½ hours of on-the-job runtime or up to five (5) 30-minute jobs.*

▶ REAL-TIME MACHINE FEEDBACK

Cable Counter measures cable distance in drain line

▶ EFFICIENCY

Quick-change drum allows for toolless setup and easy transport

▶ SPEED

AUTOFEED® Technology advances and retrieves cable up to 28' (8.5 m) per minute with zero tools required for setup

▶ CONNECTED

Create shareable job insights, maintenance reminders, and manage tool history with the RIDGID Link™ app



CATALOG NO.	MODEL NO.	DESCRIPTION
73048	K-4310 FXP	K-4310 FXP 3/4" Drum Machine (3/4" Pigtail Only) with FXP Battery - 8.0 Ah (Qty-2) & Charger
73073	K-4310 FXP	K-4310 FXP 5/8" Drum Machine (5/8" Pigtail Only) with FXP Battery - 8.0 Ah (Qty-2) & Charger

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
70788	RB-FXP40	FXP Battery – 4.0 Ah
70793	RB-FXP80	FXP Battery – 8.0 Ah
70798	RBC-FXP	FXP Battery Charger
73093	–	K-4310 FXP 3/4" Drum Only
73098	–	K-4310 FXP 5/8" Drum Only
73083	–	AUTOFEED® Assembly
41697	C-100	3/4" x 100' Inner Core Cable
43647	C-24	5/8" x 100' Inner Core Cable

Additional Drum Machine Cables & Tools Ordering Information can be found on RIDGID.com.

*Based on an internal review of K-4310 FXP field-recorded job data and a watt-hours calculation method, assuming a fully charged RB-FXP80 battery.

SECTIONAL MACHINES



PORTABLE POWER. TOTAL CONTROL.

All RIDGID® sectional machines come equipped with a unique, instant-acting cable clutch for maximum operator control. Push the handle down and the cable spins. Release the handle and the cable stops instantly.

KEY FEATURES

- INSTANT-ACTING CABLE CLUTCH
- HIGH-SPEED CUTTING ACTION
- LIGHTWEIGHT & HIGHLY PORTABLE

RIDGID

DRAIN CLEANING SECTIONAL MACHINES



K-50

K-60SP

K-5208

K-1500

K-1500SP

APPLICATION:

SINK / SHOWER LINES

FLOOR/SECONDARY DRAINS

LATERAL/MAIN LINES

	FLOOR/SECONDARY DRAINS			LATERAL/MAIN LINES	
LINE SIZE:	¾" - 4"	1¼" - 4"	2" - 8"	2" - 8"	2" - 10"
SPEED:	400 RPM	600 RPM	700 RPM	710 RPM	600 RPM
HORSEPOWER:	½ HP	½ HP	¾ HP	¾ HP	1 HP
WEIGHT:	37 lb	41 lb	55 lb	135 lb	141 lb
CABLE SIZE:	⅝", ¾", ⅞"	⅝", ¾"	⅞", 1¼"	⅞", 1¼"	⅞", 1¼"
CATALOG #:	120 V: 58920, 58960, 58980, 59000, 52972 220-240 V: 76455, 76475, 76485, 76495	120 V: 66492, 66497 220-240 V: 66512, 66517	120 V: 61688, 61693, 62378, 220-240 V: 61698, 64068, 64073, 64248	B Frame 120 V: 23697, 23717, 23707 220-240 V: 27617, 27597, 27637 A Frame 120 V: 23692, 23712, 23702 220-240 V: 27612, 27592	B Frame 120 V: 43507, 46907, 91027 A Frame 120 V: 46837, 46902, 91032

Machine only

CABLES FOR SECTIONAL MACHINES

PRODUCTS:	K-50		K-60SP	K-5208, K-1500 & K-1500SP
	CABLE DIAMETER:	⅝" (16 mm)		
AVAILABLE LENGTHS:	7 ½', 10' (2.3 m, 3 m)	7 ½', 10', 15' (2.3 m, 3 m, 4.6 m)	15' (4.6 m)	
CABLE TYPE:	Tight Wound, All-Purpose Wound, Heavy-Duty Wound	Tight Wound, All-Purpose Wound, Heavy-Duty Wound	All-Purpose Wound, Extra Heavy-Duty Wound, Heavy-Duty Wound, Extra Flexibility	

Tight Wound Cable provides good rigidity in a hollow core cable.

All-Purpose Wound Provides excellent flexibility, yet rigid enough for fast, tough cleaning.

Heavy-Duty Wound Open wind especially good for long runs.

Extra Heavy-Duty Wound Designed for 4" to 10" (102 mm to 250 mm) lines.

Extra Flexibility Recommended for 3" to 6" (76 to 152 mm) lines and ideal for 4" (102 mm) traps.

DRAIN CLEANING SECTIONAL MACHINES



K-50 SECTIONAL MACHINE

CLEARs 3/4" TO 4" (19 TO 102 MM) DRAIN LINES

Compact and versatile, the K-50 has the capability to run three different cable sizes: 5/16" (8 mm), 3/8" (10 mm) and 5/8" (16 mm). At under 40 pounds, it's a great all-around sink, shower, and floor drain machine. Optional A-17 drum adapter allows for runs up to 50' (15m) of 5/16" (8mm) or 35' (11m) of 3/8" (10mm) continuous cable length.

► **RECOMMENDED USAGE**

C-8 5/8" All-Purpose Wind Cable is best for 1 1/4" to 3" (32 to 76 mm) drains

C-9 5/8" Heavy-Duty Wind Cable is best for 2" to 4" (51 to 102 mm) drains

► **INSTANT-ACTING CABLE CLUTCH**

Maximizes operator control

Pull handle down and cable spins. Release handle and cable stops instantly

► **POWERFUL MOTOR**

300 W motor spins cable at 400 RPM

► **DRUM ADAPTER**

Runs 5/16" (8 mm) cable up to 50' (15 m) for 3/4" to 1 1/2" (19 to 38 mm) lines

Runs 3/8" (10 mm) cable up to 35' (11 m) for 1 1/4" to 2" (32 to 51 mm) lines



CATALOG NO.	MODEL NO.	DESCRIPTION
58920	K-50	Machine Only
58960	K-50-4	Machine with A-30 Cable Kit
58980	K-50-6	Machine with A-17-A Drum Adapter, A-30 Cable Kit
59000	K-50-8	Machine, with A-17-A Drum Adapter, A-17-B Drum Adapter, A-30 Cable Kit
52972	K-50-9	Machine, with A-40 Cable Kit



A-30 Cable Kit includes: Six Sections C-8, 7 1/2' x 5/8" Cable (45 feet)

- A-10 Cable Carrier
- T-201 Straight Auger
- T-202 Bulb Auger
- T-205 "C" Cutter
- T-211 Spade Cutter
- A-13 Coupling Pin Key
- A-14-6 Rear Guide Hose
- A-1 Left-Hand RIDGID Drain Cleaning Mitt



K-60SP SECTIONAL MACHINE

CLEARs 1¼" TO 4" (32 TO 102 MM) DRAIN LINES

The K-60SP is a compact drain cleaning machine that's portable enough to carry up a ladder, yet powerful enough to unclog tough blockages. Ideal for rooftop vent stacks and institutional, commercial or residential cleaning. Rear handle allows for easy transporting up ladders and onto rooftops.

▶ **RECOMMENDED USAGE**

5/8" (16 mm) cable (C-7, C-8, C-9) cleans 1¼" to 4" (32 to 102 mm) lines through 125' (38 m)

7/8" (22 mm) cable (C-10) cleans 2" to 4" (51 to 102 mm) lines through 150' (46 m)

▶ **INSTANT-ACTING CABLE CLUTCH**

Maximizes operator control

Pull handle down and cable spins. Release handle and cable stops instantly

▶ **POWERFUL MOTOR**

840 W motor spins cable at 600 RPM

▶ **EASY ACCESS**

Remove two bolts to access jaw set for cleaning or replacement, as well as access to belt drive

▶ **ADJUST IN SECONDS**

Simple adjustment knob allows unit to switch between 5/8" (16 mm) or 7/8" (22 mm) diameter cable



CATALOG NO.	MODEL NO.	DESCRIPTION
66492	K-60SP	Machine with A-1 Operator's Mitt, A-12 Pin Key, and A-60-12 Rear Guide Hose
66497	K-60SP-SE	Machine with A-1 Operator's Mitt, A-12 Pin Key, and A-60-12 Rear, Guide Hose, plus: A-61 Tool Kit and A-62 Cable Kit

A-62 Cable Kit includes: A-8 Cable Carrier
Five Sections Of C-10,
¼" Cable, Total 75 Feet

A-61 Tool Kit includes: T-101 Straight Auger
T-102 Funnel Auger
T-107 Spade Cutter
T-125 Retrieving Auger
T-150-1 Sharktooth Cutter
A-3 Tool Box
A-12 Pin Key

THE MOST POWERFUL, COMPACT SECTIONAL MACHINE ON THE MARKET

RIDGID.COM/5208



IN-FIELD SERVICEABILITY
Minimize downtime

**TOOLLESS CLUTCH
ADJUSTMENT**
Quickly switch
cable sizes

SQUARE TUBING
Added strength
and durability

CABLE CARRIER
Quickly load
cable sections

DRAIN PLUG
For increased
bearing life

**TRIDENT
DECOUPLING TOOL**
Easily disconnect
cable sections

RUBBER FEET
Anti-slip grip

RIDGID

K-5208 SECTIONAL MACHINE

CLEARs 2" TO 8" (50 TO 203 MM) DRAIN LINES

The RIDGID® K-5208 is the most powerful, compact sectional machine on the market. Power meets portability as this machine is 35% lighter and 71% smaller than previous RIDGID sectional drain cleaners. It's the sectional machine you need on your truck.



► **MORE POWER**

1248 W motor spins cable at 700 RPM up to 200' (61 m)

► **TOOLLESS CLUTCH ADJUSTMENT**

Quickly switch between cable sizes without additional tools

► **IN-FIELD SERVICEABILITY**

Easy access to clutch jaws minimizes downtime when maintenance is necessary

► **CORD & FLUID MANAGEMENT**

Integrated hooks keep cord wrapped neatly around the machine

Mess is contained within the machine, improving the bearing life. Simply remove the drain plug to dispose of waste fluids.



CATALOG NO.	MODEL NO.	DESCRIPTION
61688	K-5208	K-5208, 120 V 60 Hz Machine with guide hose
61693	K-5208	K-5208, 120 V 60 Hz Machine with guide hose, 4 C-11 cables, sectional cable carrier, and toolbox (w/cutters) kit
62378	K-5208	K-5208, 120 V 60 Hz Machine with guide hose, 7 C-11 cables, qty: 2 A-8 wire baskets, and toolbox (w/cutters) kit
67398	K-5208	K-5208, 120 V 60 Hz Machine with guide hose, 7 C-11 cables, 2 Sectional Cable Drums, and toolbox (w/cutters) kit

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
59400	—	15' (4.6 m) Rear Guide Hose
61708	—	Sectional Cable Carrier
61713	—	Sectional Cable Drum
61718	—	Trident Cable Decoupler
61723	—	Kit, K-5208 Toolbox w/cutters
62280	C-11	1¼" (32 mm) x 15' (4.6m) Standard All-Purpose Wind Cable. ⅜" (10 mm) Pitch. Good for 4" (102 mm) Traps, 3" - 8" (76 - 203 mm) Lines
67403	—	Sectional Essentials Kit - 7 x C-11 Cables, 2 x Sectional Cable Drums, 1 x K-5208 Toolbox Kit w/ Cable Tools

Additional Cable Lengths & Cutter Heads can be found on RIDGID.com



Cable Carrier
Cat. #61708



Trident Sectional
Cable Decoupler
Cat. #61718



K-5208 Machine
and Cable Kit
Cat. #67398

DRAIN CLEANING SECTIONAL MACHINES



A-FRAME

K-1500 SECTIONAL MACHINE

CLEAR 2" TO 8" (50 TO 203 MM) DRAIN AND SEWER LINES

For the heaviest blockages indoors or out, turn to the RIDGID® K-1500 sectional machine. Sturdy wheels on a low-profile "B" frame design make it easy to load and unload the machine from your truck and get into most crawl spaces, while its upright "A" frame features cable carrier storage that is ideal for in-house applications.

▶ **MORE POWER**

1196 W motor spins cable at 710 RPM

▶ **CABLE OPTIONS**

Using 1¼" sectional cable cleans 2" to 8" (51 to 203 mm) up to 200' (60 m)

7-8" sectional cable cleans 2" to 4" (51 to 102 mm) up to 175' (53m)

▶ **EASY CLUTCH JAW CHANGE OUT**

Quickly adjust unit from 1¼" sectional cable to 7-8" sectional cable

▶ **USER-FRIENDLY FRAME OPTIONS**

"A" frame features cable carrier storage during transport, ideal for in-house applications

"B" frame low-profile design loads and unloads from truck easily and fits in most crawl spaces



B-FRAME

Machine Options – A Frame

CATALOG NO.	MODEL NO.	DESCRIPTION
23692	K-1500A	Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose
23702	K-1500A	Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose, Plus: Seven Sections 1¼" (32 mm) (C-14) Cable, Total 105' (32 m), Two A-8 Cable Carriers and Nine-Piece 1¼" (32 mm) Tool Set
23712	K-1500A	Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose, Plus: Seven Sections 1¼" (32 mm) (C-11) Cable, Total 105' (32 m), Two A-8 Cable Carriers and Nine-Piece 1¼" (32 mm) Tool Set

Machine Options – B Frame

CATALOG NO.	MODEL NO.	DESCRIPTION
23697	K-1500B	Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose
23707	K-1500B	Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose, Plus: Seven Sections 1¼" (32 mm) (C-14) Cable Total 105' (32 m), Two A-8 Cable Carriers and Nine-Piece 1¼" (32 mm) Tool Set
23717	K-1500B	Machine with A-1 Mitt, A-12 Pin Key, and Rear Guide Hose, Plus: Seven Sections 1¼" (32 mm) (C-11) Cable, Total 105' (32 m), Two A-8 Cable Carriers and Nine-Piece 1¼" (32 mm) Tool Set

*Nine-Piece Tool Set includes: T-1 Straight Auger - 62840
 T-3 Funnel Auger - 63105
 T-6 Retrieving Auger - 63195
 A-3516 Hex Key - 46190
 T-13 Sawtooth Cutter - 61920
 T-50-1 Sharktooth Cutter - 98035
 A-2864 Hex Key - 46030
 T-8 Grease Cutter - 63205
 A-3 Tool Box - 59360



B-FRAME

K-1500SP SECTIONAL MACHINE

CLEARs 2" TO 10" (50 TO 254 MM) DRAIN AND SEWER LINES

One person can easily clear the heaviest blockages – indoors or out – with the heavy-duty K-1500SP sectional machine. Its unique, instant-acting cable clutch maximizes operator control of a 1500 W motor. Pull the handle down and the cable spins at 600 RPM. Release the handle and the cable stops instantly. The K-1500SP has a low-profile design with 10" (250 mm) solid ball bearing wheels that makes getting in and out of the job easier.

► **HEAVY-DUTY POWER**

1500 W motor spins cable at 600 RPM

► **CABLE OPTIONS**

Using 1¼" sectional cable cleans 2" to 8" (51 to 203 mm) up to 200' (60 m)

7-8" sectional cable cleans 2" to 4" (51 to 102 mm) up to 175' (53m)

► **EASY CLUTCH JAW CHANGE OUT**

Quickly adjust unit from 1¼" sectional cable to 7-8" sectional cable

Machine Options – A Frame

CATALOG NO.	MODEL NO.	DESCRIPTION
46837	K-1500SPA	Machine with A-1 Operator's Mitt and A-12 Pin Key, Plus: Rear Guide Hose
46902	K-1500SPA	Machine with A-1 Operator's Mitt and A-12 Pin Key, Plus: Rear Guide Hose, 150' (46 m), Ten Sections of C-11, 1¼" (32 mm) Cable, Three A-8 Cable Carriers, A-3 Tool Box, Eight-Piece 1¼" (32 mm) Tool Package
91032	K-1500SPA	Machine with A-1 Operator's Mitt and A-12 Pin Key, Plus: Rear Guide Hose & C-14 Three Carrier Cable Combination Kit

Machine Options – B Frame

CATALOG NO.	MODEL NO.	DESCRIPTION
43507	K-1500SPB	Machine with A-1 Operator's Mitt and A-12 Pin Key, Plus: Rear Guide Hose
46907	K-1500SPB	Machine with A-1 Operator's Mitt and A-12 Pin Key, Plus: Rear Guide Hose, 150' (46 m), Ten Sections of C-11, 1¼" (32 mm) Cable, Three A-8 Cable Carriers, A-3 Tool Box, Eight-Piece 1¼" (32 mm) Tool Package
91027	K-1500SPB	Machine with A-1 RIDGID® Drain Cleaning Mitt and A-12 Pin Key Plus: Rear Guide Hose - C-14 Three Carrier Cable Combination Kit

*Eight-Piece 1¼" Tool Package includes: T-1 Straight Auger
T-3 Funnel Auger
T-6 Retrieving Auger
T-8 2 1/2" Grease Cutter
T-13 2 1/2" Sawtooth Cutter
T-50 Sharktooth Cutter with 3", 4" and 5" Blades
A-2864 Hex Key (3/16")
A-3516 Hex Key (1/4")

DRAIN CLEANING CABLE GUIDE

All RIDGID® drain cleaning machines are designed to minimize downtime of the machine while maximizing cable life. Each cable is built with a unique purpose for a specific application to allow you to expand your business offering and ensure no job is left unsolved.

SECTIONAL CABLES



CABLE TYPE	CATALOG NO.	MODEL NO.	CABLE DESCRIPTION	K-50	K-60 SP	K-5208	K-1500	K-1500SP	K-1500G	FUNCTION
5/8" CABLES	62265	C-7	5/8" x 7.5' Tight-Wind	x	x					Heavy-Duty
	62270	C-8	5/8" x 7.5' All-Purpose Wind	x	x					All-Around Ability
	25046	C-8IC	5/8" x 7.5' Inner Core Cable	x	x					Heavy-Duty
	51317	C-9	5/8" x 10' Heavy-Duty Wind	x	x					Heavy-Duty
7/8" CABLES	62275	C-10	7/8" x 15' All-Purpose Wind		x	x	x	x	x	All-Around Ability
	25036	C-10PC	7/8" x 15' All-Purpose Wind w/ Inner Core		x	x	x	x	x	Heavy-Duty
1 1/4" CABLES	62280	C-11	1 1/4" x 15' All-Purpose Wind			x	x	x	x	All-Around Ability
	62295	C-14	1 1/4" x 15' Heavy-Duty Wind			x	x	x	x	Heavy-Duty
	62300	C-15	1 1/4" x 15' Extra Flexible Wind			x	x	x	x	Flexible

The sectional cable carrier lets you transport cables in and out of the jobsite faster and cleaner. A sturdy base keeps the carrier secure, so you can spin sectional cables in or out of the housing unit efficiently. The carrier keeps soiled cables contained to mitigate jobsite contamination.



SECTIONAL CABLE CARRIER
Cat. # 61708

DRUM CABLES



CABLE TYPE	CATALOG NO.	MODEL NO.	CABLE DESCRIPTION	K-50*	K-400	K-3800	K-6200	K-750R	K-750	K-7500	K-4310 FXP	FUNCTION
SINK DRUM	50652	S-2	¼" x 25' w/ Funnel Auger			x						Flexible
	50657	S-3	¼" x 35' w/ Funnel Auger			x						Flexible
	56782	C-11C	⅝" x 25' Inner Core w/ Bulb Auger	x		x						All-Around Ability
	56792	C-13IC	⅝" x 35' w/ Bulb Auger	x		x						Flexible
	56787	C-21C	⅝" x 25' Inner Core w/ Drop Head Auger	x		x						All-Around Ability
	56797	C-23IC	⅝" x 35' w/ Drop Head Auger	x		x						Flexible
⅜" CABLES	87577	C-31IW	⅜" x 50' Integral Wound Cable		x	x						Heavy-Duty
	87582	C-32IW	⅜" x 75' Integral Wound Cable		x	x						Heavy-Duty
	87587	C-33IW	⅜" x 100' Integral Wound Cable		x	x						Heavy-Duty
	37842	C-31	⅜" x 50' Inner Core Cable			x						All-Around Ability
	37847	C-32	⅜" x 75' Inner Core Cable			x						All-Around Ability
	37852	C-33	⅜" x 100' Inner Core Cable			x						All-Around Ability
½" CABLES	87592	C-44IW	½" x 50' Integral Wound Cable		x	x						Heavy-Duty
	87597	C-45IW	½" x 75' Integral Wound Cable		x	x						Heavy-Duty
	37857	C-44	½" x 50' Inner Core Cable			x						All-Around Ability
	37862	C-45	½" x 75' Inner Core Cable			x						All-Around Ability
	37867	C-45HC	½" x 75' Hollow Core Cable			x						Flexible
	55467	C-46	½" x 90' Inner Core Cable			x						All-Around Ability
⅝" CABLES	92460	C-25	⅝" x 25' Inner Core Cable				x	x	x	x	x	All-Around Ability
	92465	C-26	⅝" x 50' Inner Core Cable				x	x	x	x	x	All-Around Ability
	92470	C-27	⅝" x 75' Inner Core Cable				x	x	x	x	x	All-Around Ability
	43647	C-24	⅝" x 100' Inner Core Cable				x	x	x	x	x	All-Around Ability
	32737	C-27HC	⅝" x 75' Hollow Core Cable				x	x	x	x	x	Flexible
	58192	C-24HC	⅝" x 100' Hollow Core Cable				x	x	x	x	x	Flexible
	37628	C-25HD	⅝" x 25' Heavy-Duty Cable				x	x	x	x	x	Heavy-Duty
	37633	C-26HD	⅝" x 50' Heavy-Duty Cable				x	x	x	x	x	Heavy-Duty
	37638	C-27HD	⅝" x 75' Heavy-Duty Cable				x	x	x	x	x	Heavy-Duty
	37643	C-24HD	⅝" x 100' Heavy-Duty Cable				x	x	x	x	x	Heavy-Duty
¾" CABLES	92475	C-28	¾" x 25' Inner Core Cable						x	x	x	All-Around Ability
	92480	C-29	¾" x 50' Inner Core Cable						x	x	x	All-Around Ability
	41212	C-75	¾" x 75' Inner Core Cable						x	x	x	All-Around Ability
	41697	C-100	¾" x 100' Inner Core Cable						x	x	x	All-Around Ability
	47427	C-75HC	¾" x 75' Hollow Core Cable						x	x	x	Flexible
	47432	C-100HC	¾" x 100' Hollow Core Cable						x	x	x	Flexible

*Drum cable can be used with adapter

DRAIN CLEANING CABLE TOOLS

RIDGID® offers a wide variety of cutters, augers, and chain knockers to clean everything from grease to root blockages. With the RIDGID line of cable tools, you will always have the right tool for the job.



ALL-PURPOSE

DESCRIPTION	CAT #	MODEL #	MACHINE USED
Bulb Auger 1½" OD	62995	T-202	K-50, K-400, K-3800
Bulb Auger ¾" OD	63000	T-203	K-50, K-400, K-3800
H-D Bulb Auger-1¼"	51762	T-409	K-6200, K-750, K-7500, K-750R, K-4310 FXP

EXPLORING / FOLLOW-UP

DESCRIPTION	CAT #	MODEL #	MACHINE USED
Hook Auger	63200	T-7	K-1500, K-1500SP, K-1500G, K-5208
Drop Head 4" Long	63065	T-217	K-50, K-400, K-3800
Straight Retrieving Auger	55457	T-225	K-50, K-400, K-3800
Straight Retrieving Auger	27642	T-125	K-60, K-1500, K-1500SP, K-1500G, K-5208
Straight Retrieving Auger	63190	T-5	K-1500, K-1500SP, K-1500G, K-5208
Funnel Retrieving Auger	63195	T-6	K-1500, K-1500SP, K-1500G, K-5208
Funnel Retrieving Auger	92500	T-407	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Funnel Auger 3"	63010	T-206	K-50, K-400, K-3800
Funnel Auger	62855	T-102	K-60, K-1500, K-1500SP, K-1500G, K-5208
Funnel Auger	63105	T-3	K-1500, K-1500SP, K-1500G, K-5208
Heavy-Duty Funnel Auger	61790	T-4	K-1500, K-1500SP, K-1500G, K-5208
Straight 5" Auger	62990	T-201	K-50, K-400, K-3800
Straight Auger	62850	T-101	K-60, K-1500, K-1500SP, K-1500G, K-5208
Straight Auger	62840	T-1	K-1500, K-1500SP, K-1500G, K-5208
Heavy-Duty Straight Auger	61800	T-2	K-1500, K-1500SP, K-1500G, K-5208

SOFT BLOCKAGES

DESCRIPTION	CAT #	MODEL #	MACHINE USED
4-Blade Cutter 1"	63045	T-213	K-50, K-400, K-3800
4-Blade Cutter 1½"	63050	T-214	K-50, K-400, K-3800
4-Blade Cutter 1¾"	63055	T-215	K-50, K-400, K-3800
4-Blade Cutter 1¾"	62930	T-112	K-60, K-1500, K-1500SP, K-1500G, K-5208
4-Blade Cutter 3"	62935	T-113	K-60, K-1500, K-1500SP, K-1500G, K-5208
4-Blade Cutter 2½"	59765	T-24	K-1500, K-1500SP, K-1500G, K-5208
4-Blade Cutter 3½"	59770	T-25	K-1500, K-1500SP, K-1500G, K-5208
4-Blade Cutter 4½"	59775	T-26	K-1500, K-1500SP, K-1500G, K-5208
Spade Cutter 1¼"	63030	T-210	K-50, K-400, K-3800
Spade Cutter 1¾"	63035	T-211	K-50, K-400, K-3800
Spade Cutter 1¾"	63040	T-212	K-50, K-400, K-3800, K-4310 FXP
Spade Cutter 1¾"	92495	T-406	K-6200, K-750, K-7500, K-750R
Spade Cutter 1¾"	62880	T-107	K-60, K-1500, K-1500SP, K-1500G, K-5208
Grease Cutter 2½"	62870	T-105	K-60, K-1500, K-1500SP, K-1500G, K-5208
Grease Cutter 3½"	62875	T-106	K-60, K-1500, K-1500SP, K-1500G, K-5208
Grease Cutter 2½"	63205	T-8	K-1500, K-1500SP, K-1500G, K-5208
Grease Cutter 3½"	63210	T-9	K-1500, K-1500SP, K-1500G, K-5208
Grease Cutter 4½"	62845	T-10	K-1500, K-1500SP, K-1500G, K-5208
"C" Cutter 1"	54837	T-204	K-50, K-400, K-3800
"C" Cutter 1¾"	63005	T-205	K-50, K-400, K-3800
Heavy-Duty "C" Cutter 2"	52812	T-230	K-50, K-400, K-3800
Heavy-Duty "C" Cutter 2½"	52817	T-231	K-50, K-400, K-3800
Heavy-Duty "C" Cutter 3"	52822	T-232	K-50, K-400, K-3800

WALL-TO-WALL

DESCRIPTION	CAT #	MODEL #	MACHINE USED
Expanding Cutter 4"-6"	61770	T-15A	K-1500, K-1500SP, K-1500G, K-5208
Chain Knocker 2"	63060	T-216	K-50, K-400, K-3800
Chain Knocker	62940	T-114	K-60, K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 1½"	63220	T-221	K-50, K-400, K-3800
Flue Brush 2"	63080	T-220	K-50, K-400, K-3800
Flue Brush 2½"	63070	T-219	K-50, K-400, K-3800
Flue Brush 3"	63280	T-218	K-50, K-400, K-3800
Flue Brush 1½"	63145	T-38	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 2"	63150	T-39	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 2½"	63155	T-40	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 3"	63160	T-41	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 3½"	63165	T-42	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 4"	63170	T-43	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 4½"	6315	T-44	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 5"	63240	T-45	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 5½"	36180	T-46	K-1500, K-1500SP, K-1500G, K-5208
Flue Brush 6"	36185	T-47	K-1500, K-1500SP, K-1500G, K-5208
Sharktooth Cutter 3"	98055	T-150-1	K-60, K-1500, K-1500SP, K-1500G, K-5208
Sharktooth Cutter 4"	98060	T-150-2	K-60, K-1500, K-1500SP, K-1500G, K-5208
Sharktooth Cutter 3"	98035	T-50-1	K-1500, K-1500SP, K-1500G, K-5208
Sharktooth Cutter 4"	98040	T-50-2	K-1500, K-1500SP, K-1500G, K-5208
Sharktooth Cutter 6"	98045	T-50-3	K-1500, K-1500SP, K-1500G, K-5208
P-Trap Cutter 3"	92485	T-403	K-6200, K-750, K-7500, K-750R, K-4310 FXP
P-Trap Cutter 3½"	92490	T-404	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Double Cutter 2"	92510	T-411	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Double Cutter 2½"	92515	T-412	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Double Cutter 3"	92520	T-413	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Double Cutter 4"	92525	T-414	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Double Cutter 6"	92530	T-416	K-6200, K-750, K-7500, K-750R, K-4310 FXP

ROOTS / HEAVY BLOCKAGES

DESCRIPTION	CAT #	MODEL #	MACHINE USED
Sawtooth Cutter 2½"	62860	T-103	K-60, K-1500, K-1500SP, K-1500G, K-5208
Sawtooth Cutter 2½"	61970	T-13	K-1500, K-1500SP, K-1500G, K-5208
Sawtooth Cutter 3½"	61975	T-14	K-1500, K-1500SP, K-1500G, K-5208
Sawtooth Cutter 3"	92505	T-408	K-6200, K-750, K-7500, K-750R, K-4310 FXP
Spiral Sawtooth Cutter 1½"	62915	T-109	K-60, K-1500, K-1500SP, K-1500G, K-5208
Spiral Sawtooth Cutter 2¼"	62920	T-110	K-60, K-1500, K-1500SP, K-1500G, K-5208
Spiral Sawtooth Cutter 3"	62925	T-111	K-60, K-1500, K-1500SP, K-1500G, K-5208
Spiral Sawtooth Cutter 2½"	59625	T-21	K-1500, K-1500SP, K-1500G, K-5208
Spiral Sawtooth Cutter 3½"	63075	T-22	K-1500, K-1500SP, K-1500G, K-5208
Spiral Sawtooth Cutter 4½"	63085	T-23	K-1500, K-1500SP, K-1500G, K-5208
Spiral Bar Cutter 4"	61960	T-16	K-1500, K-1500SP, K-1500G, K-5208
Spiral Bar Cutter 8"	61855	T-18	K-1500, K-1500SP, K-1500G, K-5208
3-Blade Cutter 2"	92535	T-432	K-6200, K-750, K-7500, K-750R, K-4310 FXP
3-Blade Cutter 3"	92540	T-433	K-6200, K-750, K-7500, K-750R, K-4310 FXP
3-Blade Cutter 4"	92545	T-434	K-6200, K-750, K-7500, K-750R, K-4310 FXP
3-Blade Cutter 6"	92550	T-436	K-6200, K-750, K-7500, K-750R, K-4310 FXP

Cutters are compatible with the cable diameters the machine is designed for.

DRAIN CLEANING FLEXSHAFT® MACHINES

FlexShaft®

RIDGID.COM/FLEXSHAFT

RIDGID® FLEXSHAFT MACHINES

FLEX YOUR COVERAGE

RIDGID FlexShaft machines deliver wall-to-wall clean in 1¼" to 6" (32 to 152 mm) lines from 30' to 125' (9 to 38 m). Designed with portability and efficiency in mind, these machines provide in-and-out speed that gets you from job to job faster. Perfect for clearing grease, sludge, small tree roots, and soft blockages, FlexShaft machines are the trusted choice for drain cleaning professionals.

▶ LIGHTWEIGHT PORTABILITY

FlexShaft machines' lightweight design means you can carry one from your truck to jobsites effortlessly, and its compact profile makes for simple storage. All FlexShaft machines are fully contained systems to help mitigate jobsite contamination.

▶ WALL-TO-WALL CLEAN

Powerful chain knockers expand to the size of the pipe and deliver wall-to-wall clean with astonishing speed. Designed with the perfect balance of flexibility and durability, cables can navigate tight turns and clean long runs.

▶ INSPECT WHILE CLEANING

Inspection cameras can remain in-pipe while drain cleaning. Simultaneous camera use delivers results you can see, providing efficiency on every job.

▶ ACCESSORIES

Get the most out of your FlexShaft machine with a variety of field-tested accessories. From standard, carbide tip and penetrating head chain knockers designed for clearing different blockages to brushes for final cleanup and relining applications, your FlexShaft can be customized to your exact preferences.



See pages 44-47 for the full range of available accessories



**DRAIN CLEANING
FLEXSHAFT® MACHINES**



DRAIN CLEANING FLEXSHAFT® MACHINES



Nylon Brushes



Nylon/Steel Brushes



Chain Knockers



Carbide Tipped Chain Knockers



Penetrating Head Chain Knockers

See pages 42-47 for the full range of available chain knockers

K9-306 FLEXSHAFT MACHINE

CLEAR 3" TO 6" (75 TO 150 MM) PIPE UP TO 125' (38 M)

Get wall-to-wall clean in longer lines with the RIDGID® K9-306. Its powerful internal motor with I-Clutch™ packs a major punch, fighting through tough clogs from drain to clean-out with one step of the foot switch. Powerful chain knockers expand to pipe size, delivering 125' (38 m) of total clean. Drill-less operation provides more efficient setup and cleanup, getting you in and out of jobs faster.

▶ **SIMULTANEOUS CAMERA USE**

Inspect while cleaning

▶ **INTERNAL POWER**

Powerful internal motor with I-Clutch Electronic clutch built in for additional cable protection

▶ **INCREASED PRODUCTIVITY**

Quick cleaning and easy to transport

▶ **FULLY ENCLOSED SYSTEM**

Faster setup and cleanup

▶ **ACCESSORIES**

See pages 42-47 for the full range of available chain knockers

CATALOG NO.	MODEL NO.	DESCRIPTION
66593	K9-306	FlexShaft, K9-306 NA 3" - 6" (75 - 150 mm) Pipes Includes: 3/8" x 125' (10 mm x 35 m) cable and kit*

*K9-306 includes: Knecker, K9-306 4", Knecker, K9-306 6", Lubricant, FlexShaft 4 oz, Tool, Hex Key 4 mm, Tool, Hex Key 3 mm, Sheath Stock, RIDGID Tool Bag, Manual Pack, K9-306

Accessories

CATALOG NO.	DESCRIPTION
64338	RIDGID FlexShaft Lubricant, 8 oz
66663	FlexShaft 3/8" (10mm) Assembly, cable, sheath, couplings 125' (35 M)
66668	FlexShaft 3/8" (10mm) Sheath Stock, 12" (30 CM)
68623	RIDGID FlexShaft Bag
71858	Penetrating Tip



Sandpaper Panels

K9-102+, K9-204+ & K9-12 FLEXSHAFT MACHINES

CLEARs FROM 1¼" TO 4" (32 TO 100 MM) DRAIN LINES

These lightweight, compact machines deliver wall-to-wall clean in drain lines up to 70' (21 m). Specialized chain knockers are spun at high speeds by a cordless drill attached to the center drive shaft. The flexible cable is housed in durable nylon sheath to navigate tight turns and long runs, while a fully contained system means less jobsite mess.

▶ SIMULTANEOUS CAMERA USE

FlexShaft machines let you keep your camera in-pipe while you work

▶ INCREASE PRODUCTIVITY

Quick setup and cleaning with minimal mess

▶ ACCESSORIES

See pages 42-45 for the full range of available chain knockers

CATALOG NO.	MODEL NO.	DESCRIPTION
76193	K9-102+	FlexShaft, NA 1¼" - 2" (30 - 50 mm) Pipes. Includes: ¼" × 50' (6 mm × 15 m) cable and kit
76198	K9-204+	FlexShaft, NA 2" - 4" (50 - 100 mm) Pipes. Includes: ⅜" × 70' (8 mm × 20 m) cable and kit
74978	K9-12	FlexShaft, 1¼" - 2" Pipes, Includes: 30' ¼" cable and kit

Accessories

CATALOG NO.	DESCRIPTION
64338	FlexShaft Lubricant, 8 oz
64343	FlexShaft ¼" (6 mm) Assembly, 50' (15 m) cable, sheath, coupling
64348	FlexShaft ⅜" (8 mm) Assembly, 70' (20 m) cable, sheath, coupling
64363	Modified Wallpipe 1¼" (30 mm)
64368	Modified Wallpipe 1½" (35 mm)
64643	FlexShaft ¼" (6 mm) sheath stock, 12" (30 cm)
64648	FlexShaft ⅜" (8 mm) sheath stock, 12" (30 cm)
68933	1½" Nylon Brush, ¼" cable, 1½" pipe
68938	2" Nylon Brush, ¼" cable, 2" pipe
71838	Penetrating Ball Head, for ¼" cable
71843	Penetrating Drop Head, for ¼" cable
71848	Penetrating Ball Head, for ⅜" cable
71853	Penetrating Drop Head, for ⅜" cable
76318	FlexShaft ¼" (6 mm) DeadCore Assembly, 50' (15 m) cable, sheath, coupling
76328	FlexShaft ⅜" (8 mm) DeadCore Assembly, 70' (20 m) cable, sheath, coupling
78903	¼" Repair Coupling, for K9-102+
78908	⅜" Repair Coupling, for K9-204+
80093	Small FlexShaft Retrieval Magnet, for use with ¼" and ⅜" cable (6mm-8mm)
80103	Large FlexShaft Retrieval Magnet, for use with ⅜" and ¾" cable (8mm-10mm)



K9-102+ INCLUDES:
Knocker, K9-102+ 1¼"
Knocker, K9-102+ 2"
Lubricant, FlexShaft 4 oz
Accessory, PVC 1¼" attachment
Accessory, PVC 1½" attachment
Tool, Hex Key 4 mm
Tool, Hex Key 3 mm
Sheath Stock
RIDGID® Tool Bag
Manual Pack, K9-102 & K9-204



K9-204+ INCLUDES:
Knocker, K9-204+ 2"
Knocker, K9-204+ 4"
Lubricant, FlexShaft 4 oz
Tool, Hex Key 4 mm
Tool, Hex Key 3 mm
Sheath Stock
RIDGID Tool Bag
Manual Pack, K9-102 & K9-204




K9-12 INCLUDES:
K9-12 1 ¼" Chain Knocker,
3mm Hex Key,
Manual Pack



Repair Couplings
Compatible with K9-102+
and K9-204+ machines only

RANGE OF ACCESSORIES

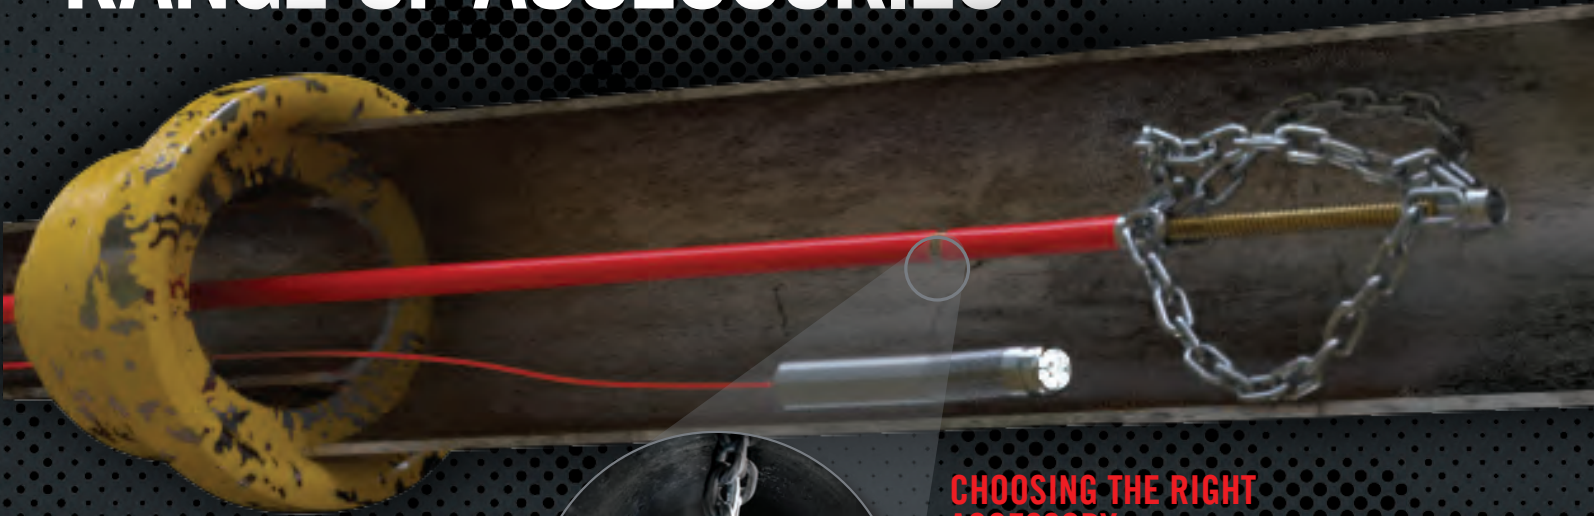

CHOOSING THE RIGHT ACCESSORY

RIDGID® FlexShaft® Machines utilize specialized accessories attached to a flexible cable that are spun at high speeds for effective wall-to-wall cleaning action. Selecting the correct chain knocker or brush for your application and pipe material will ensure an efficient cleanout.

PIPE WALL CLEANING

CHAIN KNOCKERS

SMOOTH CHAIN KNOCKERS

- For all pipe types
- For soft blockages and grease



CARBIDE TIPPED CHAIN KNOCKERS

- For hard-walled pipes
- For scale, roots, grease, and soft blockages



PENETRATING, CARBIDE TIPPED CHAIN KNOCKERS

- For hard-walled pipes
- For wipes, scale, roots, and soft blockages



BRUSHES

NYLON BRUSH

- Gentle cleaning of fragile pipes
- Centering guide for other tools
- For spreading resin when spray lining
- For final cleanup to sweep fine debris downstream



NYLON/STEEL BRUSH

- For cleaning & light grinding
- For relining preparation of PVC & cast iron pipes
- For final cleanup to sweep fine debris downstream





CLEANING

MAINTENANCE AND RELINING

Chain knockers deliver wall-to-wall clean and can get pipes working like new, creating opportunities for warranties or upcharges. Total cleaning also lets you prepare damaged pipe for relining as an alternative to digging and replacing.

CLEARING

EMERGENCY BLOCKAGES

Instead of a total pipe cleaning, get the water running again by clearing emergency blockages. Retrieval magnets are easily installed accessories perfect for picking up ferromagnetic objects up to 5lbs.

PENETRATING HEADS

*For 1/4" and 5/16" cables



BALL HEAD

- Penetrating head functionality with smooth chains when carbide tipped chains are too aggressive



DROP HEAD

- Specifically designed for dropping down stacks in back-to-back applications

PENETRATING TIP

*For 3/8" cable



PENETRATING TIP

- Penetrating tip functionality with smooth chains when carbide tipped chains are too aggressive

RIDGID

FlexShaft® K9-12, K9-102+ & K9-204+

FLEX YOUR COVERAGE.

FIND THE RIGHT **CHAIN KNOCKER** FOR THE JOB TO GET WALL-TO-WALL CLEAN

Use below table for recommended options based on blockage, pipe size, and pipe type.



		1/4" FLEXSHAFT CABLE						5/16" FLEXSHAFT CABLE													
		Chain Knockers		Carbide Tipped Chain Knockers		Penetrating Head Chain Knockers		Chain Knockers				Carbide Tipped Chain Knockers				Penetrating Head Chain Knockers					
DESCRIPTION		1 1/2" SMOOTH	2" SMOOTH	1 1/2" CARBIDE TIPPED	2" CARBIDE TIPPED	1 1/2" PENETRATING HEAD	2" PENETRATING HEAD	2" SMOOTH	2" SMOOTH	3" SMOOTH	4" SMOOTH	2" CARBIDE TIPPED	2" CARBIDE TIPPED	3" CARBIDE TIPPED	4" CARBIDE TIPPED	2" PENETRATING HEAD	2" PENETRATING HEAD	3" PENETRATING HEAD	4" PENETRATING HEAD		
CATALOG NO.		64293	64298	64283	64288	66568	66573	73118	64323	64328	64333	73123	64308	64313	64318	73133	66578	66583	66588		
PIPE SIZE		1 1/2"-1 3/4" (32-40 mm)	2" (50 mm)	1 1/2"-1 3/4" (32-40 mm)	2" (50 mm)	1 1/2"-1 3/4" (32-40 mm)	2" (50 mm)	2" (50 mm)	2" (50 mm)	3" (75 mm)	4" (100 mm)	2" (50 mm)	2" (50 mm)	3" (75 mm)	4" (100 mm)	2" (50 mm)	2" (50 mm)	3" (75 mm)	4" (100 mm)		
PIPE TYPE	COPPER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
	GALVANIZED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	CAST IRON	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	PVC	✓	✓					✓	✓	✓	✓										
	ABS	✓	✓					✓	✓	✓	✓										
	ORANGEBURG	✓	✓					✓	✓	✓	✓										
	CORRUGATED	✓	✓					✓	✓	✓	✓										
	CLAY	✓	✓					✓	✓	✓	✓										
	BLOCKAGE	GREASE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		SOFT BLOCKAGE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SCALING				✓	✓	✓	✓					✓	✓	✓	✓	✓	✓	✓	✓		



FIND THE RIGHT BRUSH AND HEAD ACCESSORIES FOR THE JOB TO GET WALL-TO-WALL CLEAN

Use below table for recommended options based on application, pipe size, and pipe type.



		1/4" FLEXSHAFT CABLE				5/16" FLEXSHAFT CABLE										
		NYLON BRUSH		BALL / DROP HEAD		NYLON BRUSH			NYLON / STEEL BRUSH			BALL / DROP HEAD		RETRIEVAL MAGNET		
DESCRIPTION		NYLON 1.5"	NYLON 2"	PENETRATING BALL HEAD	PENETRATING DROP HEAD	NYLON 2"	NYLON 3"	NYLON 4"	NYLON/STEEL 2"	NYLON/STEEL 3"	NYLON/STEEL 4"	PENETRATING BALL HEAD	PENETRATING DROP HEAD	SMALL RETRIEVAL MAGNET	LARGE RETRIEVAL MAGNET	
CATALOG NO.		68933	68938	71838	71843	68943	68948	68953	68973	68978	68983	71848	71853	80093	80103	
PIPE SIZE		1 1/2" (40 mm)	2" (50 mm)	1 1/2" (40 mm)	2" (50 mm)	2" (50 mm)	3" (75 mm)	4" (100 mm)	2" (50 mm)	3" (75 mm)	4" (100 mm)	2" (50 mm)	4" (100 mm)	1 1/4" - 4" (for 1/4" & 5/16" cable)	2 - 6" (for 1/4" & 5/16" cable)	
PIPE TYPE	COPPER	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	GALVANIZED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
	CAST IRON	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
	PVC	✓	✓	✓	✓	✓	✓	✓	✓*	✓*	✓*	✓	✓	✓	✓	
	ABS	✓	✓	✓	✓	✓	✓	✓	✓*	✓*	✓*	✓	✓	✓	✓	
	ORANGEBURG	✓	✓	✓	✓	✓	✓	✓	✓*	✓*	✓*	✓	✓	✓	✓	
	CORRUGATED	✓	✓	✓	✓	✓	✓	✓	✓*	✓*	✓*	✓	✓	✓	✓	
	CLAY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
APPLICATIONS	LIGHT GRINDING								✓	✓	✓					
	SPRAY RELINING	✓	✓			✓	✓	✓								
	FRAGILE PIPES/ GENTLE CLEANING	✓	✓			✓	✓	✓								
	FINAL CLEANUP	✓	✓			✓	✓	✓	✓	✓	✓					
	PENETRATES BLOCKAGES			✓	✓							✓	✓			
	SMALL LINE NAVIGATION			✓								✓				
	DOWN STACK NAVIGATION				✓								✓			
	RETRIEVAL													✓	✓	
	SECURING RING	68923	68923			68918	68918	68918	68918	68918	68918					

* These brushes can be used for light grinding and pipe preparation prior to lining jobs.

Any accessory can be purchased separately.

Read manual for setup.



FlexShaft® K9-306

FLEX YOUR COVERAGE.

FIND THE RIGHT **CHAIN KNOCKER**
AND HEAD ACCESSORIES FOR THE JOB
TO GET WALL-TO-WALL CLEAN

Use the table below for recommended options based on blockage, pipe size, and pipe type.



K9-306 MACHINE

3/8" FLEXSHAFT CABLE



CATALOG NO.	66618	66623	66628	66633	66638	66643	66648	66653	66658	71858
DESCRIPTION	3" SMOOTH	4" SMOOTH	6" SMOOTH	3" CARBIDE TIPPED	4" CARBIDE TIPPED	6" CARBIDE TIPPED	3" PENETRATING HEAD	4" PENETRATING HEAD	6" PENETRATING HEAD	PENETRATING TIP
PIPE SIZE (inch / mm)	3"- 4" (76-102 mm)	4"- 5" (102-127 mm)	5"- 6" (127-152 mm)	3"- 4" (76-102 mm)	4"- 5" (102-127 mm)	5"- 6" (127-152 mm)	3"- 4" (76-102 mm)	4"- 5" (102- 127 mm)	5"- 6" (127-152 mm)	3"- 6" (76-150 mm)
PIPE TYPE	COPPER			☑	☑	☑	☑	☑	☑	☑
	GALVANIZED			☑	☑	☑	☑	☑	☑	☑
	CAST IRON			☑	☑	☑	☑	☑	☑	☑
	PVC	☑	☑	☑						☑
	ABS	☑	☑	☑						☑
	ORANGEBURG	☑	☑	☑						☑
	CORRUGATED	☑	☑	☑						☑
	CLAY	☑	☑	☑						☑
BLOCKAGE	GREASE	☑	☑	☑	☑	☑	☑	☑	☑	☑
	SOFT BLOCKAGE	☑	☑	☑	☑	☑	☑	☑	☑	☑
	SCALING				☑	☑	☑	☑	☑	
	ROOTS				☑	☑	☑	☑	☑	
	WIPES							☑	☑	☑
	INCLUDED WITH KIT		☑	☑						



K9-306 MACHINE

FIND THE RIGHT BRUSH TO CLEAN AND PREPARE DRAINS WALL TO WALL

3/8" FLEXSHAFT CABLE



APPLICATION		NYLON BRUSH			NYLON/STEEL BRUSH			
		<ul style="list-style-type: none"> Nylon material for gentle cleaning of fragile pipes Suitable as a centering guide for other tools Suitable for spreading resin when spray lining 			<ul style="list-style-type: none"> Nylon – Steel material for cleaning & light grinding Suitable for relining preparation of PVC and cast iron pipes 			
BRUSH MATCHING	CATALOG NO.	68958	68963	68968	68988	68993	68998	
	PIPE SIZE (inch / mm)	3" (75 mm)	4" (100 mm)	6" (150 mm)	3" (75 mm)	4" (100 mm)	6" (150 mm)	
	PIPE MATERIAL	COPPER		☑			☑	
		GALVANIZED		☑			☑	
		CAST IRON		☑			☑	
		PVC		☑			☑	
		ABS		☑			☑	
		ORANGEBURG		☑				
		CORRUGATED		☑				
		CLAY		☑				
PORCELAIN		☑						
BRUSH DIAMETER (inch / mm)	3" (75 mm)	4" (105 mm)*	6" (155 mm)*	3" (75 mm)	4" (105 mm)*	6" (155 mm)*		
CABLE DIAMETER (mm)	10	10	10	10	10	10		
SECURING RING MATCHING		68928			68928			

*4" and 6" nylon/steel brushes need to have longer strings in order to provide a thorough cleaning



WATER JETTERS

RESTORE DRAINS TO FREE-FLOWING CAPACITY

RIDGID® water jetters fully clear grease and soft blockage obstructions in both residential and commercial applications. Available in both electric and gas models, these machines propel a flexible hose through drain lines to blast through sludge, soap, and grease blockages with 1350 to 3000 psi. As you pull the hose back, it scrubs the line, flushing debris away and restoring drains to their free-flowing capacity.

KEY FEATURES

- | GAS AND ELECTRIC MODELS AVAILABLE
- | 1350 TO 3000 PSI
- | WALL-TO-WALL CLEANING

RIDGID

DRAIN CLEANING WATER JETTERS



KJ-1350

KJ-1750

KJ-2200

KJ-3100

APPLICATION CHART

	SINK LINES			
	FLOOR/SECONDARY DRAINS			
	LATERALS			MAIN LINES
LINE SIZE:	1¼" - 4" (32 to 102 mm)	1¼" - 4" (32 to 102 mm)	1¼" - 6" (32 to 152 mm)	2" - 10" (50 to 250 mm)
MAXIMUM PRESSURE:	1350 psi (93 bar)	1750 psi (120 bar)	2200 psi (151 bar)	3000 psi (206 bar)
FLOW:	1.4 gpm (5.3 lpm)	1.4 gpm (5.3 lpm)	2.4 gpm (9.1 lpm)	5.5 gpm (20.8 lpm)
POWERED BY:	Electric 15 amp	Electric 20 amp	Gas Engine	Gas Engine
HORSEPOWER:	1.5 HP (1120 W)	2 HP (1491 W)	6.5 HP (4.8 kW)	16 HP (12 kW)
WEIGHT:	67 lbs (30.5 kgs)	75 lb (32 kg)	65 lb (30 kg)	214 lbs (97 kg)

DRAIN CLEANING WATER JETTERS



KJ-1350 WATER JETTER

CLEAR 1¼" TO 4" (32 TO 102 MM) DRAIN LINES

The RIDGID® KJ-1350 water jetter effectively cleans lines with an actual working pressure of 1350 psi (93 bar) and a flow of 1.4 gpm (5.3 lpm). Easily navigate difficult bends or traps with the standard pulse action feature (the Model KJ-1350-2 has a second level of pulse). Its 1.5 HP (1120 W) motor draws a maximum of 14 amps and can run on most standard 120 V circuits. Purpose built with quality components, the KJ-1350 features a duplex pump with a corrosion-resistant forged brass head. The control valve lets you quickly and easily adjust water pressure.

▶ **POWERFUL PRESSURE**

Actual working pressure of 1350 psi (93 bar) and flow of 1.4 gpm (5.3 lpm)

▶ **ELECTRICAL REQUIREMENTS**

1.5 HP (1120 W) motor draws a maximum of 14 amps and can run on most standard 120 V circuits

▶ **EASY OPERATION**

Thrust propels the hose down the line

▶ **CLEAN BEYOND THE DRAIN**

Optional power washer package cleans cables, tools, and heavily soiled equipment

▶ **PULSE ACTION**

Easily navigate difficult bends and traps



H-10 cart shown

CATALOG NO.	MODEL NO.	DESCRIPTION
62587	KJ-1350	KJ-1350 Standard Jetter with Pulse: H-21, H-22, and H-24 ¼" (3 mm) NPT Nozzles, ¼" × 25' (3 mm × 8 m) Sink Trap Hose, Nylon Storage Bag, Nozzle Cleaning Tool
62597	KJ-1350-C	Same as above with: H-10 Cart, ¼" × 100' (6 mm × 30 m) Trap Hose
63107	KJ-1350-2	KJ-1350 Jetter with Dual Pulse: H-21, H-22, and H-24 ¼" (3 mm) NPT Nozzles, ¼" × 50' (3 mm × 15 m) Sink Trap Hose, Nylon Storage Bag, Nozzle Cleaning Tool
63112	KJ-1350-2C	Same as above with: H-10 Cart, ¼" × 100' (6 mm × 30 m) Trap Hose

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
64707	H-21	KJ-1350 Propulsion Nozzle ¼"
64712	H-22	KJ-1350 Penetrating Nozzle ¼"
64717	H-24	KJ-1350 Drop Head Nozzle ¼"
64722	H-31	KJ-1350 Propulsion Nozzle ¼"
82832	H-25	KJ-1350 Spinning Nozzle ¼"
64727	H-32	KJ-1350 Penetrating Nozzle ¼"

Additional Hoses & Jetter Nozzles can be found on RIDGID.com

KJ-1750 WATER JETTER

CLEAR 1 1/4" TO 4" (32 TO 102 MM) DRAIN LINES

The RIDGID® KJ-1750 water jetter effectively cleans lines with an actual working pressure of 1750 psi (121 bar) and a flow of 1.4 gpm (5.3 lpm). Two levels of pulse are standard and let you easily navigate difficult bends or traps. Its 2 HP (1491 W) motor draws a maximum of 17 amps which requires a 20 amp, 120 V circuit. Purpose built with quality components, the KJ-1750 features a duplex pump with a corrosion-resistant, forged brass head. The control valve lets you quickly and easily adjust water pressure.

▶ **POWERFUL PRESSURE**

Actual working pressure of 1750 psi (121 bar) and flow of 1.4 gpm (5.3 lpm)

▶ **ELECTRICAL REQUIREMENTS**

2 HP (1491 W) motor draws a maximum of 17 amps which requires a 20 amp, 120 V circuit

▶ **EASY OPERATION**

Thrust propels the hose down the line

▶ **CLEAN BEYOND THE DRAIN**

Optional power washer package cleans cables, tools, and heavily soiled equipment

▶ **PULSE ACTION**

Easily navigate difficult bends and traps



H-30 cart shown

CATALOG NO.	MODEL NO.	DESCRIPTION
62687	KJ-1750	KJ-1750 Jetter with Dual Pulse: H-41, H-42, and H-44 1/8" (3 mm) NPT Nozzles, H-51 and H-52 1/4" (6 mm) NPT Nozzles, 1/8" x 50' (3 mm x 15 m) Sink Trap Hose, Nylon Storage Bag, Nozzle Cleaning Tool
62697	KJ-1750-C	Same as above with: H-30 Cart, 1/2" x 110' (13 mm x 34 m) Jet Hose
67332	—	62687 with: H-10 Cart, 1/4" x 100' (6 mm x 30 m) Trap Hose

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
64742	H-41	KJ-1750 Propulsion Nozzle 1/8"
64747	H-42	KJ-1750 Penetrating Nozzle 1/8"
64752	H-44	KJ-1750 Drop Head Nozzle 1/8"
64757	H-51	KJ-1750 Propulsion Nozzle 1/4"
64762	H-52	KJ-1750 Penetrating Nozzle 1/4"
82837	H-45	KJ-1750 Spinning Nozzle 1/8"

Additional Hoses & Jetter Nozzles can be found on RIDGID.com

DRAIN CLEANING WATER JETTERS



KJ-2200 WATER JETTER

CLEARs 1¼" TO 6" (32 TO 152 MM) DRAIN LINES

The RIDGID® KJ-2200 water jetter effectively cleans lines with an actual working pressure of 2200 psi (150 bar) and a flow of 2.4 gpm (9 lpm). Activate the KJ-2200's pulse action to easily navigate difficult bends or traps. Its new and improved 6.5 HP (4847 W) recoil start gasoline engine starts easily every time and features: on/off switch, choke and throttle controls, and easy access oil fill and dip stick. Purpose-built with quality components, the KJ-2200 features a triplex pump with a corrosion-resistant forged brass head. The control valve lets you quickly and easily adjust water pressure.

▶ **POWERFUL PRESSURE**

Actual working pressure of 2200 psi (150 bar) and flow of 2.4 gpm (9 lpm)

▶ **GAS ENGINE**

6.5 HP (4.8 kW) recoil start gasoline engine starts easily every time

▶ **EASY OPERATION**

Thrust propels the hose down the line

▶ **TOTAL CONTROL**

Includes FV-1 foot valve so you can control the jetting action at the drain while leaving the jetter outdoors

▶ **CLEAN BEYOND THE DRAIN**

Optional power washer package cleans cables, tools, and heavily soiled equipment

▶ **PULSE ACTION**

Easily navigate difficult bends and traps

CATALOG NO.	MODEL NO.	DESCRIPTION
63877	KJ-2200	KJ-2200 Jetter with Triple Pulse; H-61, H-62, and H-64 ¼" (3 mm) NPT Nozzles, H-71 and H-72 ¼" (6 mm) NPT Nozzles, ¾" x 75' (5 mm x 23 m) Trap Hose, FV-1 Foot Valve, Nozzle Cleaning Tool and H-1235 Wash Wand Hose ½" x 35' (13 mm x 11 m)
63882	KJ-2200-C	Same as above with: H-30 Cart and ¼" x 110' (6 mm x 34 m) Jet Hose

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
64772	H-61	Propulsion Nozzle ¼"
64777	H-62	Penetrating Nozzle ¼"
64782	H-64	Drop Head Nozzle ¼"
82842	H-65	Spinning Nozzle ¼"
64787	H-71	Propulsion Nozzle ¼"
64792	H-72	Penetrating Nozzle ¼"
82852	H-75	Spinning Nozzle ¼"

Additional Hoses & Jetter Nozzles can be found on RIDGID.com



KJ-3100 WATER JETTER

CLEARs 2" TO 10" (50 TO 254 MM) DRAIN LINES

The RIDGID® Model KJ-3100 portable water jetter gives you 3000 psi (205 bar) actual working pressure to handle large commercial and industrial applications. With its removable hose reel, there is no need to purchase expensive portable hose reels. Standard packages come equipped to handle indoor and remote applications. Completely remove the hose reel to ease loading onto service trucks. Simply rotate the hose reel forward to gain full access to the engine's gas tank and air filter. The RIDGID KJ-3100 is one of the most maneuverable jetters on the market. The unit, on its unique two-wheeled cart, easily fits through standard size doors and can negotiate tight turns with ease.

▶ **POWERFUL PRESSURE**

Actual working pressure of 3000 psi (205 bar) and flow of 5.5 gpm (21 lpm)

▶ **REMOVABLE HOSE REEL**

Allows for indoor and remote applications as well as easier loading in and out of trucks

▶ **SUPERIOR MANEUVERABILITY**

Unique two-wheeled cart easily fits through standard size doors

▶ **GAS ENGINE**

16 HP (12 kW) recoil start gasoline engine starts easily every time

▶ **CLEAN BEYOND THE DRAIN**

Power wash package and chemical injector system cleans cables, tools, and heavily soiled equipment

▶ **PULSE ACTION**

Easily navigate difficult bends and traps



CATALOG NO.	MODEL NO.	DESCRIPTION
37413	KJ-3100	KJ-3100 Jetter with Pulse, H-111 and H-112 ¼" (6 mm) NPT Nozzles, H-38 Hose Reel with ¾" x 200' (10 mm x 61 m) ID Jet Hose, ¾" x 50' (10 mm x 15 m) ID Jet/Wash Hose, FV-1 Foot Valve, Nozzle Cleaning Tool, HW-30 Wash Wand, Root Ranger Root Cutting Nozzle, HF-4 Quick Connect Hose

Accessories

CATALOG NO.	MODEL NO.	DESCRIPTION
38698	H-101	Propulsion Nozzle ¼"
38713	H-102	Penetrating Nozzle ¼"
38703	H-104	Drop Head Nozzle ¼"
38723	H-105	Spinning Nozzle ¼"
38693	H-111	Propulsion Nozzle ¼"
38708	H-115	Penetrating Nozzle ¼"
38718	H-115	Spinning Nozzle ¼"
16713	RR3000	Root Ranger Root Cutting Nozzle ¼"

Additional Hoses & Jetter Nozzles can be found on RIDGID.com



RR 3000 Nozzle
Catalog No. 16713

CAMERA REELS



THE INDUSTRY STANDARD FOR TOUGHNESS AND EASE OF USE

For more than 25 years, RIDGID® SeeSnake® camera reels have been the industry's premier diagnostic systems. Offering unmatched reliability with exceptional in-pipe viewing, RIDGID SeeSnake camera reels feature a variety of push cables that are stiff enough to push out long runs, yet flexible enough to make tight turns. These tough, small-diameter cameras have powerful LED lights to give you crisp views in the darkest of environments. That's what a quarter century of innovation looks like.

KEY FEATURES















- HDR IMAGE SENSOR OFFERS BRIGHT, CLEAR IN-PIPE IMAGE
- UNMATCHED RELIABILITY AND PERFORMANCE
- TILTSENSE™ DISPLAYS THE CAMERA'S PITCH IN PIPE

RIDGID

DIAGNOSTICS CAMERA REELS AND MONITORS GUIDE

RIDGID® offers a wide variety of Diagnostic Camera Reels and Monitors that set the benchmark for ruggedness and durability with the technology needed to finish the job. With the RIDGID line of Diagnostic Reel and Monitor tools, you will always have the right tool for the job.



	REELS	DIAMETER ESTIMATE*	CAMERA	LENGTH	SONDE
 ULTRA FLEX	 NANOreel®	1" – 2"	15.5 mm	82' (25 m)	Integrated
 HIGH FLEX	 microDRAIN™	1¼" – 3"	22 mm	65' (20 m)	Integrated
 MID FLEX	 microREEL®	1½" – 4"	25 mm	100' (30 m)	Integrated
	 C40	1½" – 6"	25 mm	131' (40 m)	FleXmitter
 MID STIFF	 M40	1½" – 8"	25 mm	131' (40 m)	FleXmitter
	 rM200A	1½" – 8"	25 mm	200' (61 m)	FleXmitter
	 Mini & Mini Pro™	1½" – 8"	30 mm/ 25 mm	200' (61 m)	FleXmitter
 STIFF	 rM200B	2" – 8"	25 mm	165' (50 m)	FleXmitter
	 Standard	2" – 12"	35 mm	200'/325' (61/99 m)	FleXmitter

*Actual pipe capacity depends on pipe conditions

RIDGID is the only name that has TruSense® technology and digital self-leveling — delivering the best in-pipe image in the industry. HDR expands the camera's dynamic range to help visibility in low-light situations, while TiltSense™ shares the camera's angle in pipe.

800.769.7743

RIDGID.COM/DIAGNOSTICS

THE ORIGINAL FIELD SERVICEABLE PIPE INSPECTION CAMERA


Since 1996



29+ YEARS. ONE CONNECTOR. ALL FIELD SERVICEABLE.

SeeSnake camera systems are designed to be field-serviceable, featuring 3-pin connectors on key components like the camera head, monitors, FleXmitter®, and interconnect cord. These connectors make troubleshooting and replacing parts straightforward, minimizing downtime and keeping your equipment running smoothly.

To learn more, visit support.seesnake.com/troubleshooting

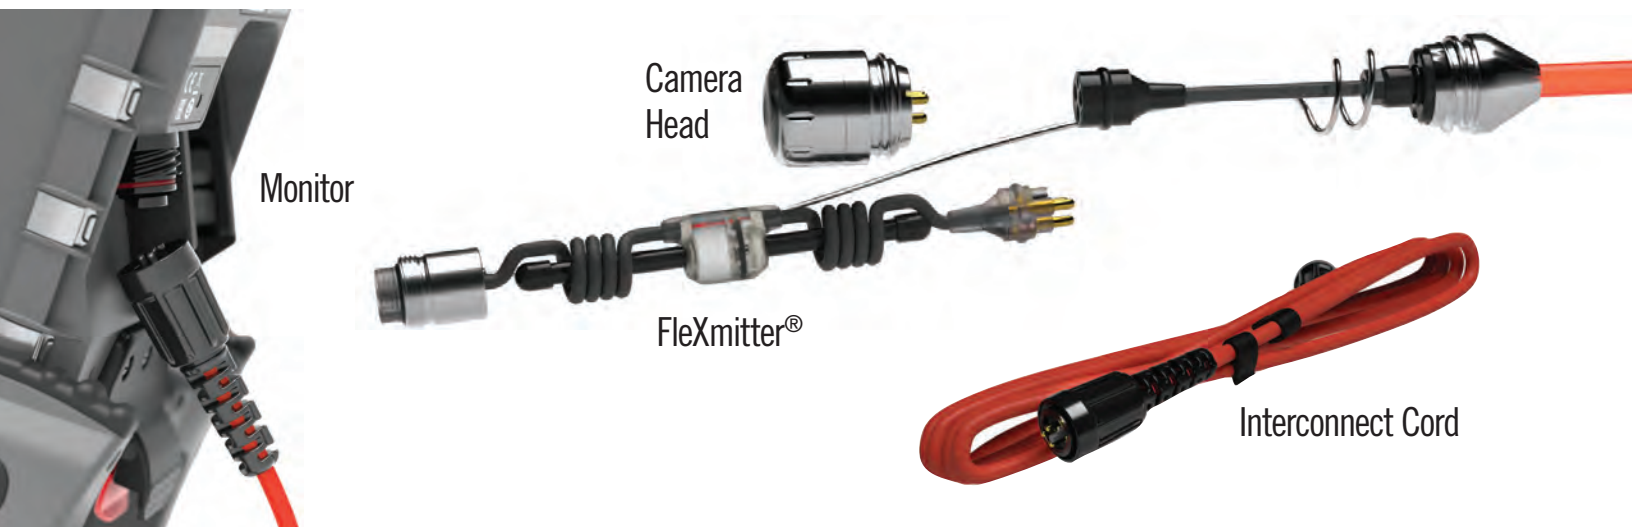

RIDGID® SeeSnake®

▶ CAMERA HEAD

The SeeSnake camera head is designed to be easily removed for troubleshooting or replacement.

▶ FLEXMITTER®

The sonde lets users pinpoint the location of a camera in a line from above ground. The Flexmitter is the most powerful SeeSnake sonde.

▶ INTERCONNECT CORD

The interconnect cord, or SeeSnake system cable, is the cord that connects the SeeSnake camera system to the monitor.

▶ SPRING

The Leader Spring helps to guide the camera around corners by managing the stiffness transition between the push cable, which bends, and the camera itself, which does not.



PART CATALOG NUMBERS

CAMERA HEADS

For camera head information contact your local service center. To find your nearest service center visit: www.ridgid.com/ca/en/service-centers-repair

SPANNER WRENCHES

17563	35mm Spanner Wrench
17588	30mm Spanner Wrench
17553	25mm Spanner Wrench
53088	22mm Spanner Wrench

INTERCONNECT CORD

67307	Interconnect Cord, 3m (10')
64627	Interconnect Cord, 10m (33')

SPRINGS

14823	Spring - Standard
22733	Spring - Mini
22728	Spring - Mini Pro, rM200A, Compact M40
53743	Inner Spring - rM200B
51818	Outer Spring - rM200B
37373	Spring - microREEL, Compact 2 / C40
35882	Spring - microDRAIN
42193	Spring - NanoReel


FLEXMITTER

15323	Flexmitter (single safety cable) - Standard / Mini / Mini Pro / Compact 2/ C40/ M40 / rM200
-------	---

DIAGNOSTICS
CAMERA REELS

RIDGID® SEESNAKE® MINI PRO & **BRAND-NEW** SEESNAKE STANDARD DSL POWERED BY **TruSense®**

RIDGID.COM/US/EN/REELS-AND-CAMERAS

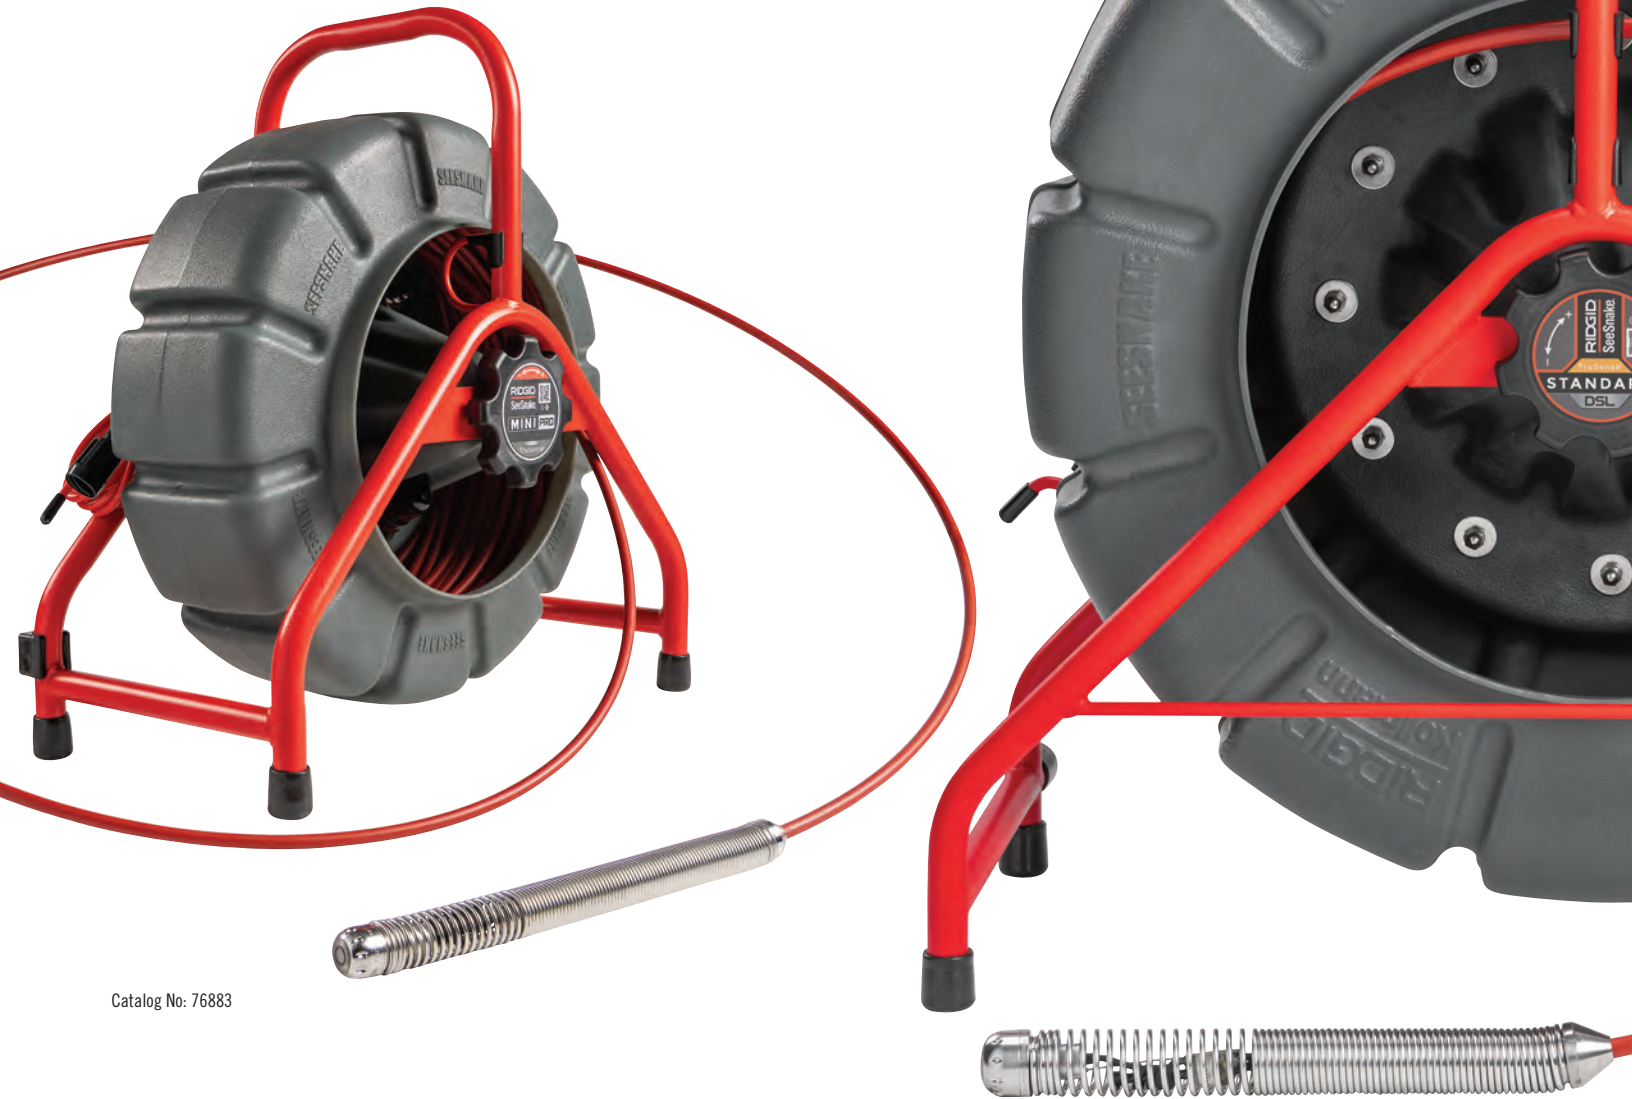

Catalog No: 76883

NEW

Catalog No: 78733



MAXIMIZE UPTIME WITH NO MOVING PARTS IN THE CAMERA HEAD

RIDGID® SeeSnake® cameras with digital self-leveling technology stay static in the pipe to keep your images upright. No moving parts, removes componentry that wears over time, this gives you a durable, long-lasting solution and always provides you with a clear and steady image. TruSense® in-pipe communication gives you the smoothest inspections with DSL stable viewing, improved imagery with high dynamic range, and exact angle tracking with the TiltSense™ inclinometer.

NEW SEESNAKE STANDARD DSL (DIGITAL SELF-LEVELING)

RIDGID is upping the industry standard with our new SeeSnake Standard DSL. Built for the most demanding inspections, its digital self-leveling keeps the camera steady down long runs and main sewer laterals with 200' of our stiffest push cable. Like all SeeSnake systems, key components, including the camera head, interconnect cord, spring, and FleXmitter® sonde, are field-serviceable with straightforward troubleshooting.

FEATURES

- ▶ Durable 35 mm camera ideal for pipes 2" to 12"
- ▶ Powerful 512 Hz FleXmitter
- ▶ TruSense-capable:
 - Digital self-leveling for clear and upright viewing with no moving parts
 - High dynamic range (HDR) for superior in-pipe imaging
 - TiltSense inclinometer displaying degree of tilt
 - Digital pan/zoom to focus on points of interest

SEESNAKE MINI PRO

Easily navigate hard 90° turns with our smallest and most rugged 25 mm self-leveling camera that stays in the center of the pipe. With a flexible push cable, the Mini Pro's DSL technology gives you unwavering viewing throughout the twists and turns.

FEATURES

- ▶ Durable 25 mm camera ideal for pipes 1½" to 8"
- ▶ Mid-flexibility 200' push cable with 3" bend radius
- ▶ Powerful 512 Hz FleXmitter
- ▶ TruSense-capable:
 - Digital self-leveling for clear and upright viewing
 - High dynamic range (HDR) for superior in-pipe imaging
 - TiltSense inclinometer displaying degree of tilt
 - Digital pan/zoom to focus on points of interest



RIDGID® SEESNAKE® STANDARD DSL WITH TRUSENSE®

NEW

INSPECT 2" TO 12" (50 TO 305 MM) LINES UP TO 200' (61 M)

The RIDGID SeeSnake Standard DSL is an ultra-rugged camera reel built for the most demanding inspections. With 200 ft (61 m) of our stiffest push cable, the Standard DSL is equipped for pushing the camera down long runs. The Standard DSL comes with a digital self-leveling camera head, providing a smooth viewing experience and maximum uptime with no moving parts.

▶ **TRUSENSE TECHNOLOGY**

HDR image sensor offers bright, clear images, TiltSense Inclinometer provides angle of camera head, Digital Zoom & Pan offers ability to focus on point of interest.

▶ **HIGH-INTENSITY LED LIGHTS**

For exceptional viewing and long life

▶ **DIGITAL SELF-LEVELING CAMERA**

The most stable, upright in-pipe images with no moving parts

▶ **POWERFUL FLEXMITTER® SONDE**

Compatible with all RIDGID locators



CATALOG NO.	DESCRIPTION
78733	200' TruSense Standard DSL

Accessories

CATALOG NO.	DESCRIPTION
64497	75 mm Star Guide, 35 mm Camera, Pkg of 20
97852	85 mm Pipe Guide, 35 mm Camera, Pkg of 10
64502	150mm Star Guide, 35mm Camera, Pkg of 10
93387	Guide Hoop, 35 mm Camera, Pkg of 4
97832	75 mm Roller Dolly, up to 6" (152 mm) Pipe
17563	Spanner Wrench, 35 mm
68568	Standard/Mini CSx Via Adapter



RIDGID® SEESNAKE® MINI PRO™ WITH TRUSENSE®

NEW

INSPECT 1½" TO 8" (38 TO 203 MM) LINES UP TO 200' (61 M)

The RIDGID SeeSnake Mini Pro takes self-leveling to the next level with digital self leveling – maximize uptime with no moving parts for the most stable in-pipe view. The Mini Pro is equipped with digital self-leveling, an HDR image sensor, and TiltSense™ Inclinometer. The 25 mm camera head and mid-flex push cable are design to navigate hard 90° bends and inspect up to 200'.

▶ **DIGITAL SELF-LEVELING CAMERA**

The most stable, upright in-pipe images with no moving parts

▶ **TRUSENSE TECHNOLOGY**

HDR image sensor offers bright, clear images, TiltSense Inclinometer provides angle of camera head, Digital Zoom & Pan offers ability to focus on point of interest.

▶ **TOTAL COMPATIBILITY**

Can be used with TiltSense and HDR image sensor

▶ **HIGH-INTENSITY LED LIGHTS**

For exceptional viewing and long life

▶ **POWERFUL FLEXMITTER® SONDE**

Compatible with all RIDGID locators

▶ **ACCESSORIES**



CATALOG NO.	DESCRIPTION
76883	SeeSnake® Mini Pro

Accessories

CATALOG NO.	DESCRIPTION
47793	36mm Camera Head Guide, 25mm Camera, Pkg of 1
35338	45 mm Pipe Guide, 25 mm Camera, Pkg of 2
40598	60 mm Pipe Guide, 25 mm Camera, Pkg of 2
46708	85 mm Pipe Guide, 25 mm Camera, Pkg of 2
46713	125 mm Pipe Guide, 25 mm Camera, Pkg of 2
63868	Various Pipe Guides, 25 mm Camera Head
17553	Spanner Wrench, 25 mm
66523	CSx Via
66528	CSx Via w/2 Batteries and Charger
68568	Standard/Mini CSx Via Adapter



RIDGID® SEESNAKE® MINI WITH TRUSENSE®

**INSPECT 1½" TO 8" (38 TO 203 MM)
LINES UP TO 200' (61 M)**

A smaller version of the iconic RIDGID SeeSnake Standard system, the RIDGID SeeSnake Mini comes equipped with TruSense technology featuring TiltSense™ inclinometer and an HDR image sensor. The Mini features a moderately stiff push cable that strikes a good balance between inspecting long runs and navigating tight turns.

- ▶ **TRUSENSE TECHNOLOGY**
HDR image sensor offers bright, clear images, TiltSense Inclinometer provides angle of camera head, Digital Zoom & Pan offers ability to focus on point of interest.
- ▶ **HIGH-INTENSITY LED LIGHTS**
For exceptional viewing and long life
- ▶ **SELF-LEVELING CAMERA AVAILABLE**
Crisp, always upright in-pipe images
- ▶ **POWERFUL FLEXMITTER® SONDE**
Compatible with all RIDGID locators



CATALOG NO.	DESCRIPTION
63628	200' (61 m) Mini 30 mm Self-Leveling TruSense
63633	200' (61 m) Mini 30 mm TruSense, Fixed Head

Accessories

CATALOG NO.	DESCRIPTION
95507	74 mm Star Guide, 30 mm Camera, Pkg of 6
97462	60 mm Pipe Guide, 30 mm Camera, Pkg of 6
93392	Guide Hoop, 30 mm Camera, Pkg of 4
17558	Spanner Wrench, 30 mm
66473	TruSense Camera Upgrade Kit, 30 mm, Self-leveling
66478	TruSense Camera Upgrade Kit, 30 mm, Fixed
66523	CSx Via
66528	CSx Via w/2 Batteries and Charger
68568	Standard/Mini CSx Via Adapter



RIDGID® SEESNAKE® STANDARD WITH TRUSENSE®

INSPECT 2" TO 12" (50 TO 300 MM) LINES UP TO 325' (99 M)

The RIDGID SeeSnake Standard has the stiffest push cable, making it perfect for long runs, particularly in larger pipes with fewer turns. TruSense comes standard – including TiltSense™ inclinometer and an HDR image sensor – this camera delivers unmatched clarity and performance.

▶ **TRUSENSE TECHNOLOGY**

HDR image sensor offers bright, clear images, TiltSense Inclinometer provides angle of camera head, Digital Zoom & Pan offers ability to focus on point of interest

▶ **HIGH-INTENSITY LED LIGHTS**

For exceptional viewing and long life

▶ **SELF-LEVELING CAMERA AVAILABLE**

Crisp, always upright in-pipe images

▶ **POWERFUL FLEXMITTER® SONDE**

Compatible with all RIDGID locators



CATALOG NO.	DESCRIPTION
63583	325' (99 m) Standard 35 mm Self-Leveling TruSense
63588	325' (99 m) Standard 35 mm TruSense, Fixed Head
63603	200' (61 m) Standard 35 mm Self-Leveling TruSense
63613	200' (61 m) Standard 35 mm TruSense, Fixed Head

Accessories

CATALOG NO.	DESCRIPTION
64497	75 mm Star Guide, 35 mm Camera, Pkg of 20
97852	85 mm Pipe Guide, 35 mm Camera, Pkg of 10
64502	150 mm Star Guide, 35 mm Camera, Pkg of 10
93387	Guide Hoop, 35 mm Camera, Pkg of 4
97832	75 mm Roller Dolly, up to 6" (152 mm) Pipe
17563	Spanner Wrench, 35 mm
66463	TruSense Camera Upgrade Kit, 35 mm, Self-leveling
66468	TruSense Camera Upgrade Kit, 35 mm, Fixed
66523	CSx Via
66528	CSx Via w/2 Batteries and Charger
68568	Standard/Mini CSx Via Adapter

DIAGNOSTICS CAMERA REELS



rM200B D2B Drum
Catalog No. 47538



rM200 D2A Drum
Catalog No. 47548

RIDGID® SEESNAKE® RM200 WITH TRUSENSE®

**INSPECT 1½" TO 8" (38 TO 203 MM)
LINES UP TO 200' (61 M)**

The stow bin and transport system makes the RIDGID SeeSnake rM200 camera system one of the most convenient reels on the market. Included TruSense technology features an HDR image sensor for superior in-pipe viewing and on-camera TiltSense™ inclinometer. The rM200 D2A configuration uses a moderately stiff 200' (61 m) push cable that provides a good compromise between cable stiffness and ability to navigate turns in the pipe. The rM200 D2B includes 165' (50 m) of our stiffest push cable, coupled with a dual nested spring to navigate tight corners that are not usually passable with such a stiff cable.

▶ **TRUSENSE TECHNOLOGY**

HDR image sensor offers bright, clear images, and TiltSense inclinometer provides angle of the camera head inside the pipe

▶ **INTERCHANGEABLE DRUM SYSTEM**

For on-the-job flexibility

▶ **BUILT-IN DOCKING SYSTEM**

For use with CS12x and CS65x monitors. Reels compatible with CS6x Versa® monitor

▶ **ACCESSORIES INCLUDE**

Pipe guides for better in-pipe imaging and a stow bin for storing tools

CATALOG NO.	DESCRIPTION
63658	Reel, SeeSnake rM200A w/ D2A Drum w/ TruSense
63663	Reel, SeeSnake rM200B w/ D2B Drum w/ TruSense



Accessories

CATALOG NO.	DESCRIPTION
47793	36 mm Camera Head Guide, 25 mm Camera, Pkg of 1
35338	45 mm Pipe Guide, 25 mm Camera, Pkg of 2
40598	60 mm Pipe Guide, 25 mm Camera, Pkg of 2
46708	85 mm Pipe Guide, 25 mm Camera, Pkg of 2
46713	125 mm Pipe Guide, 25 mm Camera, Pkg of 2
17553	Spanner Wrench, 25 mm
44038	rM200 Stow Bins
70758	Drum, rM200 D2A NTSC w/ TruSense
70763	Drum, rM200 D2B NTSC w/ TruSense

RIDGID® SEESNAKE® COMPACT C40 WITH TRUSENSE®

**INSPECTS 1½" TO 6" (38 TO 152 MM) LINES
UP TO 131' (40 M)**

The RIDGID SeeSnake Compact C40 camera reel offers fast, easy setup, and can take on diverse and demanding inspection conditions. Included TruSense technology features an HDR image sensor for superior in-pipe viewing and on-camera TiltSense™ inclinometer. Features easy setup with the RIDGID SeeSnake CS6x Versa® monitor that can be mounted in multiple positions and is compatible with all SeeSnake monitors. Medium diameter, flexible push cable makes it ideal for longer runs in main and branch lines.



- ▶ **QUICK-RELEASE DOCKING SYSTEM**
Create the optimal viewing angle with the CS6x Versa monitor
- ▶ **TRUSENSE TECHNOLOGY**
HDR image sensor offers bright, clear images, TiltSense Inclinometer provides angle of camera head, Digital Zoom & Pan offers ability to focus on point of interest
- ▶ **SELF-LEVELING 25 MM CAMERA**
Crisp, always upright in-pipe images
- ▶ **POWERFUL 512 HZ FLEXMITTER® SONDE**
Easy to trace and compatible with all RIDGID locators



CATALOG NO.	DESCRIPTION
63668	Compact C40, 131' (40 m) Reel Only
63823	Compact C40 System with CS6x Versa Monitor
63828	Compact C40 System with CS6x Versa Monitor, 1 Battery and Charger

Accessories

CATALOG NO.	DESCRIPTION
47793	36 mm Camera Head Guide, 25 mm Camera, Pkg of 1
35338	45 mm Pipe Guide, 25 mm Camera, Pkg of 2
40598	60 mm Pipe Guide, 25 mm Camera, Pkg of 2
46708	85 mm Pipe Guide, 25 mm Camera, Pkg of 2
46713	125 mm Pipe Guide, 25 mm Camera, Pkg of 2
63868	Various Pipe Guides, 25 mm Camera Head
17553	Spanner Wrench, 25 mm
63863	Push Cable for Compact C40



RIDGID® SEESNAKE® COMPACT M40 WITH TRUSENSE®

**INSPECTS 1½" TO 8" (38 TO 203 MM) LINES
UP TO 131' (40 M)**

Delivering big performance in a small package, the RIDGID SeeSnake Compact M40 camera reel is built to tackle a variety of demanding inspections. TruSense technology delivers valuable information about the in-pipe environment with an HDR image sensor and TiltSense™ inclinometer. Features easy setup with the RIDGID SeeSnake CS6x Versa® monitor that can be mounted in multiple positions, and is compatible with all SeeSnake monitors. Medium diameter, flexible push cable makes it ideal for longer runs in main and branch lines.

- ▶ **QUICK-RELEASE DOCKING SYSTEM**
Create the optimal viewing angle with the CS6x Versa monitor
- ▶ **TRUSENSE TECHNOLOGY**
HDR image sensor offers bright, clear images, TiltSense Inclinometer provides angle of camera head, Digital Zoom & Pan offers ability to focus on point of interest
- ▶ **SELF-LEVELING 25 MM CAMERA**
Crisp, always upright in-pipe images
- ▶ **POWERFUL 512 HZ FLEXMITTER® SONDE**
Easy to trace and compatible with all RIDGID locators

CATALOG NO.	DESCRIPTION
63673	Compact M40, 131' (40 m) Reel Only
63813	Compact M40 System with CS6x Versa Monitor
63818	Compact M40 System with CS6x Versa Monitor, 1 Battery and Charger

Accessories

CATALOG NO.	DESCRIPTION
47793	36 mm Camera Head Guide, 25 mm Camera, Pkg of 1
35338	45 mm Pipe Guide, 25 mm Camera, Pkg of 2
40598	60 mm Pipe Guide, 25 mm Camera, Pkg of 2
46708	85 mm Pipe Guide, 25 mm Camera, Pkg of 2
46713	125 mm Pipe Guide, 25 mm Camera, Pkg of 2
63868	Various Pipe Guides, 25 mm Camera Head
17553	Spanner Wrench, 25 mm
63858	Push Cable for Compact M40

RIDGID® SEESNAKE® MICROREEL® APX™ WITH TRUSENSE®

**INSPECTS 1½" TO 4" (40 TO 100 MM) LINES
UP TO 100' (30 M)**

The RIDGID SeeSnake microREEL APX with TruSense is a lightweight, compact, and portable diagnostic inspection camera. It offers enhanced camera functionality including TruSense technology and auto-image rotation for bright, clear in-pipe images and on-screen camera angle and image orientation feedback. The microREEL APX includes a kickstand for use with the CSx Via™, and offers enhanced stability and usability when positioned at a 45° angle.



- ▶ **TRUSENSE® TECHNOLOGY**
APX camera reels offer TruSense technology with an HDR image sensor for superior in-pipe viewing and on-camera TiltSense™ inclinometer
- ▶ **EASY TRANSPORT**
Lightweight and compact
- ▶ **REMOVABLE DRUM**
Can be swapped with microDRAIN™ and NANOREEL® drums

CATALOG NO.	DESCRIPTION
70808	microREEL APX with TruSense Technology
78118	microREEL APX & CSx Via
78728	microREEL APX & CSx Via w/1 Battery & 1 Charger

Accessories

CATALOG NO.	DESCRIPTION
70723	Kit, Slipping Connector w Cable
69758	Kit, Kickstand Accessory
71498	Spare, Slipping Connector



RIDGID® SEESNAKE® MICROREEL® CA-350™

**INSPECTS 1½" TO 3" OR 4" (40 TO 75 OR 100 MM)*
LINES UP TO 100' (30 M)**

The RIDGID SeeSnake microREEL CA-350 video inspection system allows you to perform inspections quicker and easier than ever. This lightweight and compact system has the ability to inspect lines up to 100'. The docking handle is designed to transport the microREEL CA-350 monitor with ease. This system includes an adapter so that your microREEL CA-350 Inspection Camera can be connected (inspection camera sold separately).

▶ **SIMPLIFICATION**

Equipped with the microREEL CA-350 adaptor for inspection and documentation with the micro CA-350 inspection camera (micro CA-350 sold separately)

▶ **PORTABILITY**

CA-350 docking handle is designed to easily transfer equipment from jobsites

▶ **EASY NAVIGATION**

Mid-flex push cable ideal for small diameter (1½" to 4", 40 to 101 mm) and tight-turn radius inspections up to 100' (30 m)

▶ **DURABILITY**

Hardened stainless steel camera head & spring assembly is durable and reliable for a long service life.

* 3" (76 mm) when used with a micro CA-350 inspection camera. 4" (102 mm) when used with a SeeSnake monitor.

CATALOG NO.	DESCRIPTION
70803	SeeSnake microREEL CA
70728	SeeSnake microREEL CA-350 Kit



Accessories

CATALOG NO.	DESCRIPTION
35338	45 mm Pipe Guide, 25 mm Camera, Pkg of 2
40598	60 mm Pipe Guide, 25 mm Camera, Pkg of 2
17553	Spanner Wrench, 25 mm Handleless
33108	Interconnect Cable for SeeSnake Monitor
33113	Interconnect Cable CA-350
55898	micro CA-350 Inspection Camera
34623	Drum, microREEL L100 115V
35243	Drum, microREEL L100C 115V
69758	Kickstand Accessory



RIDGID® SEESNAKE® NANOREEL®

INSPECTS 3/4" TO 2" (19 TO 50 MM) LINES UP TO 82' (25 M)

The RIDGID SeeSnake NANOREEL inspection camera opens up new possibilities in drain inspection with the smallest-diameter camera and most flexible push cable of all SeeSnake systems. This reel is ideal for long-run, small-diameter runs. Applications where only borescopes could reach can now be inspected using the NANOREEL inspection camera. Boiler tubes, supply lines, sprinkler systems, and a wide array of specialty applications can be inspected using the NANOREEL inspection camera.

- ▶ **MANEUVERABILITY**
Small 15mm camera head with ultra flexible push cable navigates tight spaces
- ▶ **PORTABILITY**
Lightweight and compact carrying case design is easy to carry to jobsites and store in between
- ▶ **STABILITY**
Built-in kickstand can be used upright for tight spaces, at an angle for added leverage or on four feet to accommodate the CSx Via.
- ▶ **DURABILITY**
Hardened stainless steel camera head & spring assembly is durable and reliable for a long service life
- ▶ **VISIBILITY**
Camera heads feature long-lasting, high-efficiency LEDs that provide greater views inside pipes
- ▶ **TRACEABILITY**
Integrated 512Hz sonde allows for easy line tracing and locating
- ▶ **VERSATILITY**
Use with any SeeSnake monitor or Wi-Fi Hub



CATALOG NO.	DESCRIPTION
70038	SeeSnake NANOREEL

Accessories

CATALOG NO.	DESCRIPTION
42778	30 mm and 25 mm Pipe Guide Set, 16 mm Camera Head, Pkg of 2
70723	Slipring and 3m Interconnect Cable
70718	Slipring, 3m Interconnect Cable, and CA-350 Adapter
67808	CA-350 Adapter and Docking Handle
69758	Kickstand Accessory
71498	Slipring Connector
67307	3m Interconnect Cable
55898	micro CA-350 monitor

DIAGNOSTICS CAMERA REELS



SEESNAKE® MICRODRAIN™ APX™ WITH TRUSENSE®

1¼" TO 3" (32 - 75 MM) LINES UP TO 65' (20 M). PASSES MULTIPLE 90° BENDS IN MOST 1.5" (40 MM) DRAIN LINES

SeeSnake microDRAIN APX with TruSense is the ideal pipe inspection camera for small pipes and conduits with tight turns. The advanced, high-flexibility push cable and small-radius camera design allows inspection through small-diameter pipes, p-traps, and small-radius bends that other inspection systems often cannot inspect.

▶ **EASY TRANSPORT**

Lightweight and compact design is one-half the size of popular inspection systems, easily stowed in a truck and carried onto the jobsite.

▶ **DURABILITY**

Reliable construction with hardened stainless steel camera head spring assembly for a long service life as well as long lasting high-intensity lights for exceptional viewing

▶ **MANEUVERABILITY**

Ideal for inspections with tight turns

▶ **COMPATIBILITY**

Multi-monitor compatibility with existing SeeSnake monitors, or the micro CA-350 digital inspection camera



CATALOG NO.	DESCRIPTION
70023	SeeSnake microDRAIN APX
80643	SeeSnake microDRAIN Via Kit
80653	SeeSnake microDRAIN Via Kit w/1 Battery & 1 Charger

Accessories

CATALOG NO.	DESCRIPTION
34318	42 mm Pipe Guide, 22 mm Camera, Pkg of 2
40593	36 mm Pipe Guide, 22 mm Camera, Pkg of 2
53088	Spanner Wrench, 22 mm
70723	Kit, Slipping Connector w/3m Cable
70718	Kit, CA-350 Adapter, Slipping Connector w/3m Interconnect Cable
67808	Kit, CA-350 Adapter w/Docking Handle
69758	Kickstand Accessory
71498	Spare, Slipping Connector
67307	Interconnect Cable, 3m



DIGITAL REPORTING MONITORS

TOTALLY CONNECTED.

The entire line of RIDGID® SeeSnake® digital reporting monitors comes equipped with Wi-Fi connectivity. Stream inspections to your iOS® or Android™ device with the free HQx® Live companion app. Every RIDGID SeeSnake monitor integrates seamlessly with our SeeSnake camera reels.

KEY FEATURES

- WI-FI CONNECTIVITY – STREAM TO A SECOND SCREEN
- SMARTER REPORTING – GENERATE DETAILED REPORTS IN THE FIELD
- SEAMLESS INTEGRATION – COMPATIBLE WITH ALL RIDGID SEESNAKE REELS

DIAGNOSTICS
DIGITAL REPORTING MONITORS



RIGID® SEESNAKE® CS6X VERSA® REPORTING MONITOR

VERSATILE PIVOTING FRAME ALLOWS FOR ON-SITE EASE OF USE WITH FLEXIBLE PLACEMENT

The RIDGID SeeSnake CS6x Versa is an ergonomic, all-in-one solution for capturing media and delivering inspection results to your customers. The CS6x Versa easily docks onto Compact series reels and features multiple mounting positions and an adjustable kickstand to suit jobsite conditions. A 5.7" (145 mm) daylight viewable display provides a crisp, clear in-pipe image. The CS6x Versa supports the use of TruSense® features on SeeSnake camera reels with TruSense technology.

- ▶ **ON-SITE FLEXIBILITY**
Dock on Compact series camera reels, or use free standing with all RIDGID camera reels
- ▶ **ADJUSTABLE MONITOR**
Rotate the kickstand and mounting frame for optimal inspection viewing
- ▶ **ENHANCED CONNECTIVITY**
Integrated Wi-Fi lets you stream or record inspections to an iOS® or Android™ device with the HQx® Live app, or to a Windows-powered device with HQ software for Windows
- ▶ **HIGH-QUALITY IMAGE**
Daylight display with glare reduction provides a clear view of the in-pipe image



HQx Live App*

CATALOG NO.	DESCRIPTION
64943	CS6x Versa Monitor
64968	System, CS6x Versa w/2 Batteries and 1 Charger
45363	AC Battery Adapter
56513	Battery, 18V 2.5Ah LI - World
56518	Battery, 18V 5.0Ah LI - World
64383	Charger, 120V RIDGID NA



CS6x Versa docks on all Compact series reels for easy transport and all-in-one workflow.

*Download the HQx Live App From



RIDGID® SEESNAKE® CS65XR DIGITAL REPORTING MONITOR

INTERNAL SOLID STATE DRIVE LETS YOU STORE IMAGES AND VIDEOS FROM MULTIPLE JOBS

The RIDGID® SeeSnake® CS65XR is a powerful, all-in-one reporting solution for plumbing diagnostics. Built on the time-tested platform of the SeeSnake CS65XR monitor, now the CS65XR boasts a crisp, 1024 × 768 XGA high resolution and daylight viewable display for exceptional viewing on the jobsite. The water-resistant, built-in keyboard and full-featured reporting software let you enhance captured media with overlaying notes and customer information right from the job site.

▶ **WI-FI COMPATIBILITY**

Lets you stream or record inspections to an iOS® or Android™ device with the HQx® Live app



HQx Live App*

▶ **USB PORTS**

Dual USB ports for easy delivery of multiple copies of an inspection

▶ **INTERNAL GPS**

Geotag media with positional information when available

▶ **INTERNAL STORAGE**

Internal solid state drive offers 128 GB of storage



SeeSnake rM200 with CS65XR docked for easy transport.

CATALOG NO.	DESCRIPTION
68768	CS65XR Digital Reporting Monitor w/Wi-Fi
69038	CS65XR w/2 Batteries and 1 Charger Kit
45363	AC Battery Adapter
56513	Battery, 18V 2.5Ah LI - World
56518	Battery, 18V 5.0Ah LI - World
64383	Charger, 120V RIDGID NA



*Download the HQx Live App From



DIAGNOSTICS
DIGITAL REPORTING MONITORS



RIDGID® SEESNAKE® CS12X DIGITAL REPORTING MONITOR

**LARGEST SCREEN. LONGEST BATTERY LIFE.
HIGHEST RESOLUTION.**

The RIDGID SeeSnake CS12x monitor features dual battery power for maximum runtime on the job. Its 12.1" (307 mm) screen with a 1024 × 768 resolution delivers a high-contrast display that is still crisp and clear in the daylight. The CS12x comes equipped with our most powerful processor for fast start-up time and high-speed performance.

- ▶ **ENHANCED CONNECTIVITY**
Integrated Wi-Fi lets you stream or record inspections to an iOS® or Android™ device with the HQx® Live app
- ▶ **DUAL BATTERY POWER**
Two batteries can be installed for maximum runtime
- ▶ **POWERFUL PROCESSOR**
Faster start-up and performance
- ▶ **LARGE 12.1" (307 MM) DISPLAY**
With a crisp, clear 1024 × 768 resolution



CATALOG NO.	DESCRIPTION
57278	CS12x Digital Reporting Monitor
57288	CS12x Monitor w/2 Batteries and 1 Charger
45363	AC Battery Adapter
56513	Battery, 18V 2.5Ah LI - World
56518	Battery, 18V 5.0Ah LI - World
64383	Charger, 120V RIDGID NA



*Download the HQx Live App From





RIGID® SEESNAKE® CSX VIA™

The RIDGID SeeSnake CSx Via is a flexible, bring-your-own-screen solution. Capture, stream, and share superior quality images from your device. The free HQx® Live app gives you remote control over the camera, distance counter, and sonde. CSx Via works with all TruSense® SeeSnake systems.

► **CONVENIENCE AND FLEXIBILITY**

Interchangeable across multiple reels through the interconnect cable port

► **RELIABLE CONNECTIVITY**

Between the CSx Via and the mobile device for enhanced productivity with the HQx Live app or HQ software for Windows

► **MULTI-REEL COMPATIBILITY**

Compatible with the RIDGID SeeSnake microDRAIN™, microREEL®, NANOreel®, Compact Series reels and rM Series reels



HQx Live App*

CATALOG NO.	DESCRIPTION
66523	CSx Via Monitor-Less Wi-Fi Hub

SEESNAKE® STANDARD & MINI CSX VIA™ MOUNT

SeeSnake Standard & Mini CSx Via Mount converts any SeeSnake Standard or Mini camera reel to a Wi-Fi reel, when paired with the CSx Via Wi-Fi control device. Once securely mounted to the steel frame, the CSx Via locks in providing a flexible, bring-your-own-screen solution to stream, capture, and share superior inspection images. Attach your personal device holder* to the integrated 1" RAM® ball mount.

CATALOG NO.	DESCRIPTION
68568	Standard/Mini CSx Via Adapter
70118	CSx Via and Standard/Mini CSx Via Adapter
70128	CSx Via, Std/Mini Via Adapter w/2 Batteries and Charger

RIGID SEESNAKE HQx® DOCK™



The RIDGID SeeSnake HQx Dock is designed to deliver a flexible, convenient way to mount your tablet when using the SeeSnake HQx Live app. Featuring a spring-loaded tablet holder, double ball and socket arm, and pivoting kickstand, the HQx Dock can hold most tablets and is adjustable for optimal viewing at the jobsite. Use as a free-standing unit or mount onto any RIDGID SeeSnake Compact Series reels for fast, easy setup.

CATALOG NO.	DESCRIPTION
67363	HQx Dock w/Spring Loaded Holder

*Download the HQx Live App From



DIAGNOSTICS DIGITAL REPORTING MONITORS

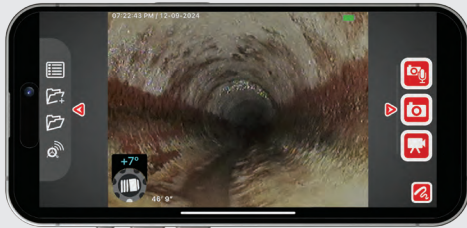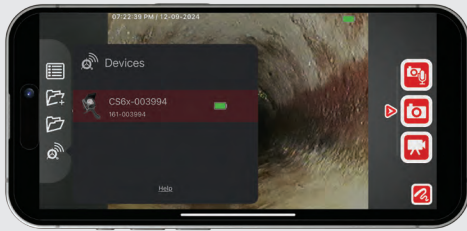

* Download the HQx Live App and RIDGIDConnect App From Google Play or the App Store

** Messaging and data rates may apply. Some Android devices may not be able to send and receive data over a cellular network while connected to a CSx monitor over Wi-Fi.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. Android is a trademark of Google LLC.



HQx Live App*



The RIDGIDConnect site is full of screen casts and videos to help you quickly get started. Register for a free trial or sign up for a Basic or higher level account today. Visit www.ridgidconnect.com to get started or sign up for training.

RIDGID® SEESNAKE® HQX® LIVE DIGITAL INSPECTION SOFTWARE

HQx Live is a free app that works with your SeeSnake CSx series Wi-Fi enabled monitor to share inspections with your customers. Available on iOS® and Android™ devices, HQx Live provides second screen flexibility, allowing you to stream live video directly to a mobile device. You can also capture and share photos, PhotoTalk™ media, and video.

MONITOR AND RECORD

- ▶ Turn on the monitor's built-in Wi-Fi to quickly connect to an iOS or Android device
- ▶ Stream inspection footage directly on a connected mobile device
- ▶ Capture photos, video, and PhotoTalk media, and quickly share over a cellular connection**
- ▶ Open the Job Gallery to easily view, edit, and manage jobs and inspection media
- ▶ Quickly annotate media with shareable captions
- ▶ Email, text, or upload inspection media through a variety of platforms, including YouTube™ (Google account required)
- ▶ Remotely control camera and monitor functions, such as camera brightness and the sonde
- ▶ Keep your SeeSnake CSx series monitor updated with wireless over-the-air updating

RIDGIDCONNECT® ONLINE BUSINESS TOOL

RIDGIDConnect is an online website designed for contractors and service providers that will allow you to create and share media rich reports with your customers that include videos, documents, and pictures often collected from your jobsites.



RIDGIDConnect App*

ORGANIZE & MANAGE JOBS

- ▶ Easily access reports for past customers and addresses with built-in contact management
- ▶ Keep private notes on jobs and customers for quick reference
- ▶ Schedule and assign jobs for dispatch within your company
- ▶ Store data files online for easy retention
- ▶ Organize data with bookmarking tools like tagging key images from videos

CONVENIENTLY CREATE & SHARE REPORTS

- ▶ Generate and share media-rich reports with videos, documents, and images
- ▶ Compress long videos for faster uploads via the desktop app
- ▶ Upload directly to your RIDGIDConnect account from SeeSnake® HQx™ software without rework
- ▶ Share reports between HQx Live app and RIDGIDConnect mobile app
- ▶ Control report sharing with options to set expiration dates, limit views, or allow downloads
- ▶ Share via email, a link, or text message



HAND-HELD INSPECTION

ELIMINATE THE GUESSWORK

RIDGID® hand-held inspection cameras reduce the amount of time it takes to detect and diagnose hard-to-reach problems. Using a camera and light source attached to a flexible cable, these cameras send live images back to a high-visibility digital LCD display.

KEY FEATURES

- | COLOR LCD SCREEN
- | LED LIGHTING WITH ADJUSTABLE BRIGHTNESS
- | ERGONOMIC PISTOL GRIP DESIGN

800.769.7743

RIDGID.COM/DIAGNOSTICS

DIAGNOSTICS INSPECTION CAMERAS



RIDGID® MICRO CA-25 INSPECTION CAMERA

PERFECT FOR BASIC AND SHORT-RANGE INSPECTION JOBS

The RIDGID micro CA-25 features a 4' long, 17 mm aluminum imager head with four ultra-bright LED lights, bringing superior image quality to its 2.7" Color LCD Screen. It also features Video Out for transferring live images to external devices and 180° Digital Image Rotation for getting upright images.

- ▶ **COLOR PICTURE**
2.7" (69 mm) Color LCD screen
- ▶ **VIDEO OUT**
Transfer live images to external devices
- ▶ **UPRIGHT IMAGES**
Digital images can be rotated 180 degrees

CATALOG NO.	DESCRIPTION
40043	micro CA-25 Inspection Camera





RIDGID® MICRO CA-150 INSPECTION CAMERA

CAPTURE UP TO 20 STILL IMAGES FOR PLAYBACK ON SCREEN LATER

The RIDGID micro CA-150 inspection camera allows you to perform more detailed visual inspections in even harder-to-reach areas. Its ergonomic one-handed grip gives you steady control while four bright LED lights on a waterproof camera head help you diagnose the problem. The micro CA-150 has a large 3.5" color display for clear viewing.

- ▶ **COLOR PICTURE**
3.5" (89 mm) color display
- ▶ **WATERPROOF CAMERA**
Illuminated by four bright LED lights
- ▶ **PLAYBACK LATER**
Capture up to 20 still images for playback



CATALOG NO.	DESCRIPTION
36848	micro CA-150 Inspection Camera

Accessories

CATALOG NO.	DESCRIPTION
37098	6 mm Imager with 1 m Cable
37093	6 mm Imager with 4 m Cable
37108	3' (1 m) Cable Extension
37113	6' (2 m) Cable Extension

DIAGNOSTICS
INSPECTION CAMERAS



RIDGID® MICRO CA-350 INSPECTION CAMERA

12 V RECHARGEABLE LITHIUM-ION BATTERY FOR EXTENDED INSPECTIONS

The RIDGID micro CA-350 inspection camera is great for identifying leaks or other issues behind walls and in hard to reach areas. The 12 V rechargeable lithium-ion battery gives you longer runtime for extended inspections. Enhanced features like image rotation and digital zoom make it easier to diagnose potential problems.

- ▶ **LONGER RUN TIME**
12 V rechargeable lithium-ion battery for extended inspections
- ▶ **COLOR PICTURE**
3.5" (89 mm) color display
- ▶ **WATERPROOF CAMERA**
Illuminated by four bright LED lights
- ▶ **ENHANCED FEATURES**
Image rotation and digital zoom



CATALOG NO.	DESCRIPTION
55898	micro CA-350 Inspection Camera

Included: micro CA-350 with 17 mm imager, battery, charger, USB cable, hook, magnet and mirror accessories, RCA cable, AC adapter, headset with microphone, 8GB SD card.

Accessories

CATALOG NO.	DESCRIPTION
37098	6 mm Imager with 1 m Cable
37093	6 mm Imager with 4 m Cable
37108	3' (1 m) Cable Extension
37113	6' (2 m) Cable Extension



UTILITY LOCATING



FIND IT FASTER.

RIDGID® utility locators feature an easy-to-use visual mapping display that allows you to locate utility lines and sondes or beacons with confidence. These locators can be used with RIDGID SeeSnake® cameras equipped with sonde transmitters to find the camera head during an inspection. They can also be used with a line transmitter to find buried utilities.

KEY FEATURES

- FIND SONDES OR BEACONS UNDERGROUND
- EASY TO USE VISUAL MAPPING DISPLAY
- INDUCE A SIGNAL TO LOCATE UTILITIES

UTILITY LOCATING EQUIPMENT

RIDGID® SEEKTECH® AND NAVITRACK® LOCATING RECEIVERS

RIDGID locating receivers give users an accurate and instantly intuitive way to locate sondes and trace utility lines. Powered by an omnidirectional antenna system and real-time signal processing, RIDGID receivers provide an easy-to-use visual mapping display that allows you to locate with confidence. Use with a SeeSnake® camera equipped with a sonde transmitter to locate the camera head during an inspection, or use with a line transmitter to find buried utilities.



SeekTech SR-24LE



SeekTech SR-20



NaviTrack Scout®

CATALOG NO.	76813	21893	19238
OMNIDIRECTIONAL MAPPING DISPLAY	Yes	Yes	Yes
USER-DEFINED FREQUENCIES	Yes up to 35 kHz	Yes up to 35 kHz	No
NUMBER OF ACTIVE LINE TRACE FREQUENCIES	All up to 35 kHz	All up to 35 kHz	3
SONDE FREQUENCIES	All up to 35 kHz	All up to 35 kHz	4
PASSIVE SEARCH	OmniSeek (searches all passive bands at once)	OmniSeek (searches all passive bands at once)	50/60 Hz
DEPTH	Continuous	Continuous	Semi-Continuous
WEIGHT W/BATTERIES	4.1 lb / 1.9 kg	4 lb / 1.8 kg	3 lb / 1.4 kg
BLUETOOTH®	Yes	No	No
POWER SOURCE	4 C-cell	4 C-cell	4 C-cell

RIDGID SEEKTECH LINE TRANSMITTERS

Accurately trace buried utilities by applying a signal with a RIDGID SeekTech ST series transmitter. All transmitters have multiple frequency options and are capable of applying a signal by direct connection and induction. Powerful 5 W and 10 W transmitters apply a strong signal for easy locates.



SeekTech ST-510



SeekTech ST-305



SeekTech ST-305R

CATALOG NO.	21903	21898	50793R
MAX POWER OUTPUT	10 W	5 W	5 W
DIGITAL DISPLAY	Yes	No	No
LINE TRACE FREQUENCIES	Selections up to 262 kHz	4	4
INDUCTIVE FREQUENCIES	4	3	3
SIMULTANEOUS TRANSMIT 2 LINE FREQUENCIES	No	Yes	Yes
WEIGHT W/ BATTERIES	7.9 lb / 3.6 kg	2.9 lb / 1.3 kg	3.1 lb / 1.4 kg
BLUETOOTH®	No	No	No
POWER SOURCE	8 D-cell/External*	6 C-cell*	18 V/6 C-cell*

*External power source is supplied by user

RIDGID SEEKTECH 18 V ADAPTOR

Attach the adaptor to the SeekTech SR-20, SR-24, or NaviTrack Scout to enable use with a RIDGID 18 V battery. The adaptor easily fits into the alkaline battery cavity, providing a flexible power option.

CATALOG NO.	DESCRIPTION
66503	Locator 18 V Adaptor
66518	Locator 18 V Adaptor with 2 Batteries and Charger



Accessories

CATALOG NO.	DESCRIPTION
72963	SeekTech Inductive Signal Clamp



RIDGID® SEEKTECH® SR-24LE LOCATOR WITH BLUETOOTH® AND GPS

TRACE ANY FREQUENCY FROM 10 HZ TO 35 KHZ

The RIDGID SR-24LE is a precision utility locating instrument with GPS and Bluetooth® Low Energy technology for easy integration with external data capture devices. The SR-24LE's intuitive mapping display shows the utility's estimated position, direction, and depth, while audio cues guide the operator over the utility. The omnidirectional antenna array captures the complete signal field, making it easy to acquire the signal and trace its path for greater speed and accuracy as the gradient antenna pair provides left/right guidance, for centering over the signal. Already equipped with a SeekTech 18V Battery Adapter, this locator is ready to power with a RIDGID 18V lithium-ion battery (not included) for long-lasting power in the field.

- ▶ **INTUITIVE MAPPING**
Shows the utility's estimated position, direction, and depth, while audio cues help to guide the operator
- ▶ **OMNIDIRECTIONAL ANTENNAS**
Greater speed and accuracy
- ▶ **BUILT-IN GPS**
Track location coordinates for mapping and GIS applications
- ▶ **RIDGIDTRAX**
Stream data to iOS® and Android™ phones and tablets or high-precision GPS instruments



RIDGIDTrax App*

CATALOG NO.	DESCRIPTION
76813	SeekTech SR-24 Line Locator w/Bluetooth and GPS

Accessories

CATALOG NO.	DESCRIPTION
72963	SeekTech 4" (100 mm) Inductive Signal Clamp
21898	SeekTech ST-305 Transmitter (5 W)
22173	SR-20/SR-24 Replacement Case (C-cell Batteries)
50793R	SeekTech ST-305R Transmitter (5 W; 18 V Compatible)
66503	Locator 18 V Adaptor
66518	Locator 18 V Adaptor Kit with 2 Batteries and Charger
66498	SR-20/SR-24 Replacement Case (18 V Battery)



*Download the RIDGIDTrax App From





RIDGID® SEEKTECH® SR-20 LOCATOR

TRACE ANY FREQUENCY FROM 10 HZ TO 35 KHZ

The RIDGID SeekTech SR-20 is a lightweight, yet rugged utility line locator that provides all the information you need for locating underground cables and pipes. It features an omnidirectional antenna array and gradient antennas to quickly locate and follow the target line's path.

- ▶ **OMNIDIRECTIONAL ANTENNAS**
Capture the complete signal field for greater speed and accuracy
- ▶ **MAPPING DISPLAY**
Shows the utility's estimated position, direction and depth
- ▶ **GRADIENT ANTENNAS**
Deliver left/right guidance and help evaluate signal shape
- ▶ **FOLDABLE MAST**
For easy transport and storage

CATALOG NO.	DESCRIPTION
21893	SeekTech SR-20 Line Locator (Includes Case)
46918	SR-20 + ST-305 Transmitter + 4" Inductive Signal Clamp
66508	SR-20 + ST-305R Transmitter + Inductive Signal Clamp and Locator 18 V Adaptor



Accessories

CATALOG NO.	DESCRIPTION
72963	SeekTech 4" (100 mm) Inductive Signal Clamp
21898	SeekTech ST-305 Transmitter (5 W)
22173	SR-20/SR-24 Replacement Case (C-cell Batteries)
50793R	SeekTech ST-305R Transmitter (5 W; 18 V Compatible)
66503	Locator 18 V Adaptor
66518	Locator 18 V Adaptor Kit with 2 Batteries and Charger
66498	SR-20/SR-24 Replacement Case (18 V Battery)



Catalog No: 66508

RIDGID® NAVITRACK® SCOUT® LOCATOR

LOCATES RIDGID SEESNAKE® IN-LINE TRANSMITTERS, SONDES, AND ENERGIZED METALLIC LINES

The NaviTrack Scout locator is designed to solve the most demanding sonde locators using the same omnidirectional locating technology as the full-featured SR® series utility line locators. The NaviTrack Scout offers continuous depth measurement when the receiver's orientation is correctly aligned.

- ▶ **MULTI-DIRECTIONAL ANTENNA**
No nulls or false peaks to complicate the locate
- ▶ **GREATER ACCURACY**
Verify the locate position using a micro-mapping display to mark distinctive poles in front of and behind the target
- ▶ **AUTOMATIC DEPTH**
Depth is automatically calculated and displayed when over the target



CATALOG NO.	DESCRIPTION
19238	NaviTrack Scout Locator

Accessories

CATALOG NO.	DESCRIPTION
16728	NaviTrack Battery Sonde, 512-AAA





RIDGID® SEEKTECH® ST-510 TRANSMITTER

ENERGIZE METALLIC LINES FOR TRACING WITH A LOCATOR

The RIDGID SeekTech ST-510 transmitter features 10 W of fully variable power output. Its LCD display provides instant visual feedback on line resistance and current flow while audio feedback confirms a good circuit before beginning a trace.

- ▶ **VARIABLE POWER**
10 W of fully variable power output
- ▶ **LCD DISPLAY**
Instant visual feedback on line resistance and current flow
- ▶ **AUDIO CONFIRMATION**
Confirm a good circuit before beginning a trace

CATALOG NO.	DESCRIPTION
21903	SeekTech ST-510 Transmitter (10 W)



RIDGID SEEKTECH INDUCTIVE SIGNAL CLAMP ACCESSORY

COMPATIBLE WITH ALL RIDGID TRANSMITTERS

Provides a traceable/charged signal to a cable or pipe through induction when it is not possible to connect transmitter leads directly to the target conductor. Once the signal is applied, it can be traced using a compatible receiver.

CATALOG NO.	DESCRIPTION
72963	SeekTech Inductive Clamp

RIDGID® SEEKTECH® ST-305 AND ST-305R TRANSMITTERS

The RIDGID SeekTech ST-305 and ST-305R are compact yet powerful multifrequency transmitters. They can be used with any RIDGID SeekTech or NaviTrack® receiver to find buried conductors such as pipes, cables, and wires.

▶ **THREE OPERATING MODES**

Apply a signal onto a buried conductor directly using the metallic leads, inductively with the internal antenna, or with the optional SeekTech Inductive Clamp accessory

▶ **MULTIPLE FREQUENCY OUTPUT OPTIONS**

Low, medium, and high frequencies from 1 to 262 kHz are available

▶ **FULL RECEIVER COMPATIBILITY**

Designed for use with any SeekTech or NaviTrack receiver to trace and mark the positions of buried pipes and cables

CATALOG NO.	DESCRIPTION
21898	SeekTech ST-305 Transmitter (5 W)
50793R	SeekTech ST-305R Transmitter (5 W; 18 V Compatible)
66933	SeekTech ST-305R System with Battery and Charger



With its battery shoe, the ST-305R can be powered by a Li-Ion 18 V rechargeable battery or six alkaline or NiMH C-cell batteries.

RIDGID NAVITRACK BATTERY SONDE

MEETS FCC CLASS B AND EN 55022 CLASS B REQUIREMENTS

The RIDGID remote transmitter attaches to a drain cleaning cable or water jetter hose for in-line locating. It features a 512 Hz signal and flashing LED lights that indicate that the sonde is transmitting.



CATALOG NO.	DESCRIPTION
16728	NaviTrack Battery Sonde, 512 – AAA

RIDGID