TRACPipe® TRACPipe® AP TRACPipe® PS II

Product

90° Appliance Stub out for use with TracPipe and TracPipe AP Sizes 3/8" - 1" (Also Sold as KIT w/Floppy)

Project Information


Job Name:	Date Submitted:
Location:	Submitted By:
Engineer:	Approved By:
Contractor:	Manufacturer's Rep:

Installation

Must be installed in accordance with the TracPipe Design Guide and Installation Instructions and all applicable codes

Application Information

Schedule 40 B.I.P. 90° stub out for use as a rigid termination of TracPipe and TracPipe AP. Typical application used as a wall mount at movable appliance locations.

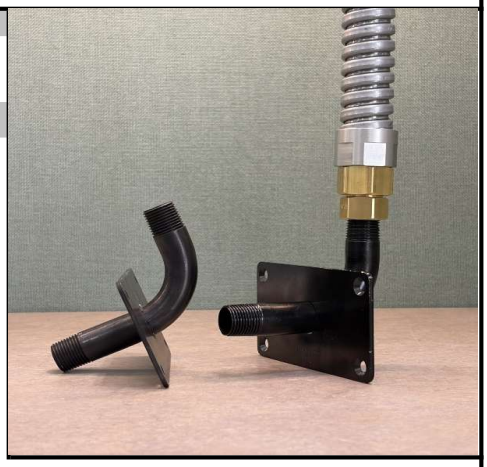

Technical Data

Materials

Pipe	Schedule 40 BI
Mounting Plate	12 GA Black E-Coated Steel

Pressure Ratings (used with tubing)

Specification Operating Pressure	25 PSIG
CSA International Evaluation Report - Max Operating Pressure, 3/8" through 1"	125 PSIG

Temperature Ratings (used with tubing)

Operating Temperature Range	-20 to 200 Deg F

Codes

ICC Codes (IFGC, IRC, IMC), NFPA 54 / ANSI Z223.1, UPC, CAN/CSA B149.1, NFPA 58

Standards

ANSI LC1 / CSA 6.26, ANSI Z223.1

Listings

CSA, ICC PMG 1058, IAPMO (UPC) File No. 3682

Dimensional Information

✓	*TP Size*	*P/N*	*Outlet length (Nom. in.)*	*Fitting Height (Nom. in.)*	*Mounting Plate I X W (in.)*	*Male NPT Pipe Size*	*Weight (lbs)*
❒	3/8" & 1/2"	FGP-AF-90SO-500	2-1/4"	3-1/4"	5" - 2-3/4"	1/2"	0.75
❒	3/4"	FGP-AF-90SO-750	2-1/4"	3-1/4"	5" - 2-3/4"	3/4"	0.85
❒	1"	FGP-AF-90SO-1000	2-1/4"	3-1/4"	5" - 2-3/4"	1"	1.5

❒	3/8" & 1/2"	*FGP-AF-90SO-500-KIT	INCLUDES FGP-AF-F-375/500, FGP-FL-500, & FGP-FPY-500CT
❒	3/4"	*FGP-AF-90SO-750-KIT	INCLUDES FGP-AF-F-750, FGP-FL-750, & FGP-FPY-750CT
❒	1"	*FGP-AF-90SO-1000-KIT	INCLUDES FGP-AF-F-1000, FGP-FL-1000, & FGP-FPY-1000CT

* Sold as a kit which includes TracPipe System female fitting, floppy conduit adapter, and 1ft section of floppy conduit

Omega Flex, Inc. * 451 Creamery Way * Exton, PA 19341
Tel: 610-524-7272 * Toll Free: 800-671-8622 * Fax: 610-524-7282
www.omegaflex.com

© 2026 Omega Flex, Inc.
TracPipe is a registered trademark of Omega Flex, Inc.