
Permanent Split Capacitor Packaged Terminal A/C Heat Pump, Single and Double Shaft 5.0” Diameter, Open Air Over

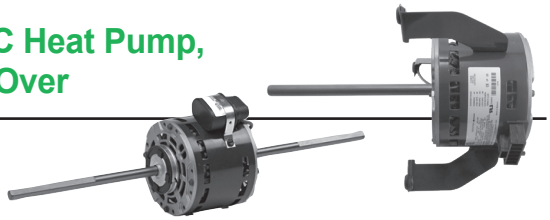


APPLICATIONS:

Designed to meet manufacturer’s requirements for direct drive fans, blowers and packaged terminal A/C heat pumps.

FEATURES:

- Bearings Have All Angle Thrust System
- Suitable for Use With 370V Capacitors
- Continuous Duty, Air Over
- Automatic Reset Thermal Overload Protector
- 3.5” shaft height for resilient base unless noted
- Connection Information Furnished in the Nameplate Data

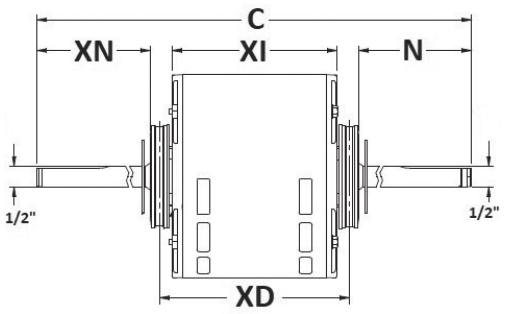

Single Shaft, Resilient Base

HP	RPM/Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Motor Shaft Rotation	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/30	1600 / 3 SPD	115-127	1269	$304	BALL	3	0.7	CCWLE	6.5	3.8	11.4	7.19	CI,IE
	1100 / 3 SPD	115	1374	$338	SAB	5	0.5	CWLE	8.5	4.1	13.6	9	CI,TR
	1100 / 3 SPD	115-127	4125	$270	BALL	4	0.53	CCWLE	8.0	4.1	13.2	12.19	CI,IE
1/20	1100 / 3 SPD	115	1175	$250	BALL	5	1.0	REV	9.3	4.1	14.4	7.5	CI,TR
	1100 / 3 SPD	115	1676	$380	SAB	5	0.55	CWLE	8.9	3.3	13.1	12	CI,TR
1/12	1375 / 3 SPD	115-127	1211	$324	BALL	6	1.35	CCWLE	6.5	3.8	11.4	6.6	CI,IE


Single Shaft, Flex Mount

HP	RPM/Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Motor Shaft Rotation	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/30	1100 / 3 SPD	115	1218	$297	BALL	7.5	.73	CCWLE	7.0	3.8	10.8	7.01	H48,IE
	1100 / 3 SPD	277	1259	$250	BALL	3	.32	CCWLE	7.0	4.1	11.06	9.5	H48,IE
1/20	1100 / 3 SPD	115	1258	$307	BALL	7.5	1.22	CCWLE	7.0	3.8	10.8	5.22	H48,IE
	1100 / 3 SPD	277	1264	$311	BALL	3	0.42	CCWLE	7.0	3.8	10.8	7.23	H48,IE
	1075 / 3 SPD	208-230	1378	$287	BALL	5	.6	CCWLE	6.5	4.1	10.6	11.6	H48,IE
1/15	1075 / 3 SPD	265	1961	$270	SAB	4	.6	CCWLE	7.0	3.8	10.8	8.38	H48
	1075 / 3 SPD	277	1365	$257	BALL	4	.42	CCWLE	7.0	4.1	11.1	8.38	H48,IE
	1040 / 3 SPD	115	1377	$257	SAB	7.5	1.3	CCWLE	6.5	4.1	10.6	8.38	H48,IE
1/8	1000 / 5 SPD	115	1161	$179	BALL	5	2.3	CCWLE	5.1	4.3	9.4	8.26	CI
1/5	925 / 3 SPD	208-240	4129	$238	SAB	6	1.9	CCWLE	7.0	4.6	11.6	8.38	98
	1050 RPM	115	2867P	$113	SAB	5	3.0	CCWLE	3.8	4.5	8.3	13.36	CI,H22,MI
1/4	975 / 3 SPD	115	4130	$258	SAB	12.5	6.0	CCWLE	7.0	4.8	11.8	8.38	IE
	1075 / 3 SPD	277	1424	$217	BALL	7.5	1.61	CCWLE	7.5	4.8	12.3	11.74	

Note 64 Capacitor Supplied Detached
Note 98 50/60 Hertz
Note CI Capacitor Included Mounted
Note H22 Flex Mount is Removable

Note H48 Terminal block
Note IE OEM to IEC
Note MI OEM to Miller
Note TR OEM to Trane

Permanent Split Capacitor Packaged Terminal A/C Heat Pump, Single and Double Shaft 5.0" Diameter, Open Air Over

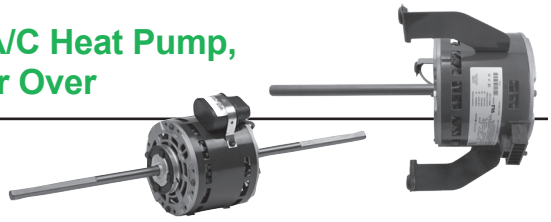

Single Shaft, Lug Mount

HP	RPM/Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Motor Shaft Rotation	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/20	1075 / 3 SPD	277	4137	$252	SAB	4	0.55	CCWLE	6.7	4.3	11	8.8778	IE
1/16	850 / 700 / 525 RPM	115	1105	$254	SAB	5	1.1	CWLE	2.2	4.1	6.3	8.5627	CI,TR
	850 / 3 SPD	277	1678	$257	SAB	4	0.5	CWLE	2.2	4.1	7.6	22.6	CI,H30,TR
1/10	810 / 3 SPD	277	1679	$277	SAB	5	.51	CWLE	2.5	4.1	6.6	13	CI,H8,TR

Double Shaft, Resilient Base

HP	RPM/Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Motor Shaft Rotation	Shaft N	Shaft XN	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/20	1075 / 4 SPD	115	1270	$277	BALL	5	.86	CWLE	10.1	10.1	4.4	25.6	7.98	CI
1/15	1100 / 3 SPD	115	1090	$397	SAB	5	.80	CWLE	9.7	10.8	3.8	25.4	13	CI,TR
1/12	1375 RPM	115-120	1256	$292	BALL	6	1.4	CCWLE	8.2	8.2	4.4	21.9	10.6	CI,IE
1/10	1050 RPM	115	1182	$304	BALL	7.5	1.7	CWLE	9.5	10.0	4.1	24.6	6.5	CI,H6
	1050 / 5 SPD	115	2832	$362	SAB	5	2.5	CWLE	10.0	10.0	4.3	24.3	14.4	CI
	1050 / 5 SPD	115	2827P	$358	BALL	5	2.5	CWLE	10.0	10.0	4.1	25.1	20	CI,H53
1/8	1500 / 3 SPD	277	1964	$295	SAB	4	0.8	CCWLE	7.8	8.2	4.1	21.2	8.64	CI,IE
1/6	1625 / 4 SPD	115	8525	$323	SAB	5	2.2	CCWLE	9.4	9.4	4.3	24	12.52	CI,FC,H53
	1500 / 3 SPD	115	1192	$304	BALL	7.5	2.3	CWLE	10.0	10.0	4.1	25.1	9.55	CI,TR
	1450 RPM	115-120	1257	$299	BALL	7.5	2.5	CCWLE	8.2	8.2	4.4	21.9	11.4	CI,IE
	1350 / 3 SPD	115-127	1210	$308	BALL	5	1.8	CCWLE	8.0	8.2	4.3	21.65	10.38	CI,H51,IE
1/5	1625 / 3 SPD	208-230	1353	$324	SAB	5	1.2	CCWLE	9.3	9.3	4.1	23.8	9.8	CI,FC
1/4	1625 / 4 SPD	208-230	1381	$396	SAB	5	1.2	CCWLE	9.1	9.1	4.3	23.5	11.58	
	1625 / 2 SPD	208-230	1279	$329	SAB	5	1.4	CCWLE	9.1	9.1	4.1	23.22	13	CI,FC,H53

Double Shaft, Flex Mount

HP	RPM/Spds.	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Motor Shaft Rotation	Shaft N	Shaft XN	Shell XI	Total C	Ship Wt. (lbs)	Notes
1/8	1090 / 3 SPD	115-127	1401	$237	BALL	10	1.7	CCWLE	6.8	6.7	4.1	17.6	8.38	CI,IE

Note CI Capacitor Included Mounted
Note H6 3/8" Shaft
Note H51 50 Hertz
Note H53 3.0" Shaft Height
Note H8 5.6" Diameter

Note H30 Includes Special Cord And Plug
Note FC OEM to First Company
Note IE OEM to IEC
Note TR OEM to Trane