

# THIS SPACE FOR DESIGNER/ENGINEER APPROVAL

|                         |            |                        |
|-------------------------|------------|------------------------|
| Job/Customer _____      | Date _____ | Contractor _____       |
| Model Specified _____   | Qty _____  | Approved By _____      |
| Designer/Engineer _____ | Date _____ | Contractor's PO# _____ |
| Submitted by _____      | Date _____ | Other _____            |

## 8061W Series

**Full Port Forged Brass Ball Valves  
w/ Hi-Flow Hose Drain, Adjustable Packing Gland  
& Reversible Handle - LEAD FREE**

**Press**

**250 CWP / 250°F Max  
ISO 9001**





**LEAD FREE  
CLEAN BRASS**  
THE CLEAR CHOICE  
FOR THE PROFESSIONAL

Certified to  
NSF/ANSI 61  
& NSF/ANSI 372



| LEAD FREE<br>ITEM # | SIZE   | CTN | CASE | A       | B     | C       | D       | E       |
|---------------------|--------|-----|------|---------|-------|---------|---------|---------|
| 80612W              | 1/2"   | 4   | 40   | 3 3/4   | 5/8   | 1 3/8   | 3 7/8   | 1 15/16 |
| 80613W              | 3/4"   | 4   | 32   | 4 7/16  | 7/8   | 1 9/16  | 3 7/8   | 2 1/8   |
| 80614W              | 1"     | 2   | 20   | 4 13/16 | 1 1/8 | 1 9/16  | 4 11/16 | 2 5/8   |
| 80615W              | 1 1/4" | 2   | 16   | 5 1/2   | 1 3/8 | 1 3/4   | 4 11/16 | 3       |
| 80616W              | 1 1/2" | 1   | 8    | 5 7/8   | 1 5/8 | 1 13/16 | 5 5/8   | 3 9/16  |
| 80617W              | 2"     | 1   | 6    | 7       | 2 1/8 | 2 1/8   | 5 5/8   | 3 15/16 |

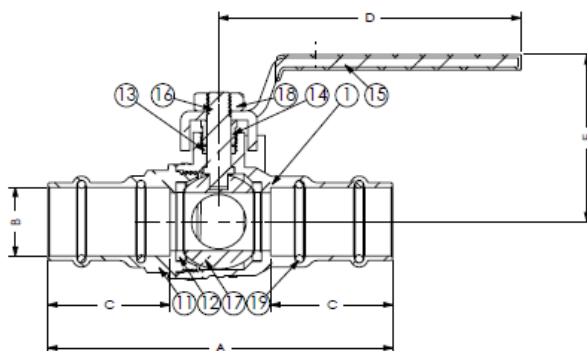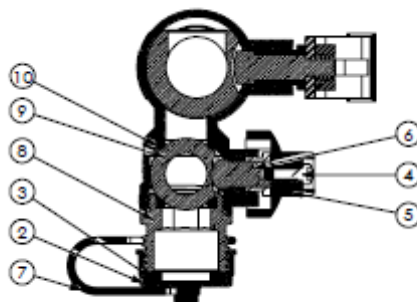

| NO. | DESCRIPTION   | MATERIAL        |
|-----|---------------|-----------------|
| 1   | BODY          | BRASS           |
| 2   | DRAIN CAP     | BRASS           |
| 3   | WASHER        | EPDM            |
| 4   | SCREW         | STAINLESS STEEL |
| 5   | DRAIN HANDLE  | ALUMINUM        |
| 6   | DRAIN STEM    | BRASS           |
| 7   | STRAP         | PVC             |
| 8   | DRAIN END CAP | BRASS           |
| 9   | DRAIN BALL    | BRASS CP        |
| 10  | SEAT          | PTFE            |
| 11  | END CAP       | BRASS           |
| 12  | SEAT          | PTFE            |
| 13  | PACKING STEM  | PTFE            |
| 14  | PACKING NUT   | BRASS           |
| 15  | HANDLE        | STEEL HCP       |
| 16  | STEM          | BRASS           |
| 17  | TEE BALL      | BRASS CP        |
| 18  | NUT           | STAINLESS STEEL |
| 19  | O-RING        | EPDM            |

| TEMP °F | PSI |
|---------|-----|
| 100     | 250 |
| 250     | 200 |

**Specifications:** Designed for residential, commercial or industrial use with water, oil or gas. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland

**Webstone**  
VALVE INNOVATION

Quality and Commitment Since 1954

www.webstonevalves.com · P: (800) 225-9529 · F: (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

8061Wspec\_121213