


"QUALITY PUMPS SINCE 1939"

SECTION: 2.60.110
 FM1606
 0311
 Supersedes
 0305

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

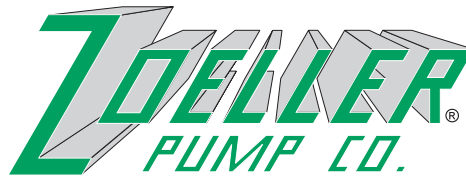

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

COMPARE THESE FEATURES:

- Automatically removes condensation from air conditioning and 90+ condensing furnaces, as well as:
 - ✓ Dehumidifiers
 - ✓ Ice Makers
 - ✓ Water Coolers
 - ✓ Refrigeration Systems
- Indicator lights for power (green), pump run (yellow) and high level alarm (red)
- 3/8" ID discharge w/check valve
- Handles condensate up to 140°F (60°C).
- 20 ft. TDH
- Compact design (6" x 6" x 11½" long)
- 1 gallon capacity
- Built-in safety switch
 - ✓ Will automatically shut pump down in event of failure.
 - ✓ Has ¼" quick connects for safety switch and alarm
- 115 Volt AC, 1 phase
- 6' power cord
- Listed in US and Canada
- 24 month limited warranty
- 4 inlet options


MODEL 521
Multi-Purpose
CONDENSATE
Pump



Product may not be exactly as pictured.



Tested to UL Standard UL778
 & Certified to CSA
 Standard C22.2 No. 108

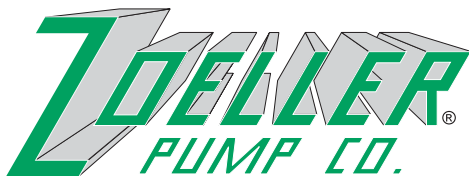

Manufacturers of . . .

"QUALITY PUMPS SINCE 1939"

TOTAL DYNAMIC HEAD FLOW PER HOUR			
Feet	Meters	Gallons	Liters
3	.9	102	386
6	1.8	90	341
9	2.7	79	299
12	3.7	66	250
15	4.6	49	185
18	5.5	23	87
Shut-off Head		20 ft. (6.1m)	