



# Round Adjustable Floor Drain w/ Polished Nickel Bronze, Bronze, or Chrome-Plated Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

## PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (Cast Iron or ABS) threaded adjustable adaptor, and round (Polished Nickel Bronze, Bronze or Chrome-Plated) secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

### Top Size and Material - (Pick ONE)

|               |                                     |                                               |
|---------------|-------------------------------------|-----------------------------------------------|
| ___ LC-FR05CP | 5 [127] Chrome-Plated Bronze Top    | 1-3/8 [36] Min. 3-1/32 [78] Max. Adjustment   |
| ___ LC-FR05PB | 5 [127] Polished Bronze Top         | 1-3/8 [36] Min. 3-1/32 [78] Max. Adjustment   |
| ___ LC-FR05NI | 5 [127] Polished Nickel Bronze Top  | 1-3/8 [36] Min. 3-1/32 [78] Max. Adjustment   |
| ___ LC-FR06NI | 6 [152] Polished Nickel Bronze Top  | 1-1/2 [39] Min. 3-3/16 [81] Max. Adjustment   |
| ___ LC-FR07NI | 7 [178] Polished Nickel Bronze Top  | 1-9/16 [40] Min. 3-3/16 [81] Max. Adjustment  |
| ___ LC-FR08NI | 8 [203] Polished Nickel Bronze Top  | 1-5/8 [42] Min. 3-9/32 [84] Max. Adjustment   |
| ___ LC-FR10NI | 10 [254] Polished Nickel Bronze Top | 1-13/16 [46] Min. 3-7/16 [88] Max. Adjustment |

### Threaded Shank Material - (Pick ONE)

|           |                   |                      |
|-----------|-------------------|----------------------|
| ___ LC-CS | Cast Iron Adaptor | 4 [102] NPSM Threads |
| ___ LC-PS | ABS Adaptor       | 4 [102] NPSM Threads |

### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)


|            |          |                       |                             |
|------------|----------|-----------------------|-----------------------------|
| ___ LC-C2N | D.C.C.I. | 4 [102] Body Ht.      | 2 [51] No-Hub Outlet        |
| ___ LC-C3N | D.C.C.I. | 4 [102] Body Ht.      | 3 [76] No-Hub Outlet        |
| ___ LC-C4N | D.C.C.I. | 4 [102] Body Ht.      | 4 [102] No-Hub Outlet       |
| ___ LC-C2P | D.C.C.I. | 4-5/64 [104] Body Ht. | 2 [51] Push-On Outlet       |
| ___ LC-C3P | D.C.C.I. | 4-3/64 [102] Body Ht. | 3 [76] Push-On Outlet       |
| ___ LC-C4P | D.C.C.I. | 4-1/64 [102] Body Ht. | 4 [102] Push-On Outlet      |
| ___ LC-A2S | ABS      | 3-5/64 [78] Body Ht.  | 2 [51] Solvent Weld Outlet  |
| ___ LC-A3S | ABS      | 3-51/64 [96] Body Ht. | 3 [76] Solvent Weld Outlet  |
| ___ LC-A4S | ABS      | 4-1/64 [102] Body Ht. | 4 [102] Solvent Weld Outlet |
| ___ LC-P2S | PVC      | 3-5/64 [78] Body Ht.  | 2 [51] Solvent Weld Outlet  |
| ___ LC-P3S | PVC      | 3-51/64 [96] Body Ht. | 3 [76] Solvent Weld Outlet  |
| ___ LC-P4S | PVC      | 4-1/64 [102] Body Ht. | 4 [102] Solvent Weld Outlet |

(Check/specify appropriate drain options)

### Suffixes

- \_\_\_ LC-CC Cast Iron Membrane Clamp Collar
- \_\_\_ LC-RC Universal Pre-Pour ABS Rough-In Cover for 5 [127] and 6 [152] Round and Square Tops.
- \_\_\_ LC-RC5 Pre-Pour ABS Rough-In Cover for 5 [127] Round Top.
- \_\_\_ LC-RC6 Pre-Pour ABS Rough-In Cover for 6 [152] Round Top.
- \_\_\_ LC-VP Vandal-Proof Secured Top

| Top Size | Top Open Area Sq. In. [cm <sup>2</sup> ] |
|----------|------------------------------------------|
| 5 [127]  | 7 [45]                                   |
| 6 [152]  | 9 [58]                                   |
| 7 [178]  | 13 [84]                                  |
| 8 [203]  | 19 [123]                                 |
| 10 [254] | 23 [148]                                 |

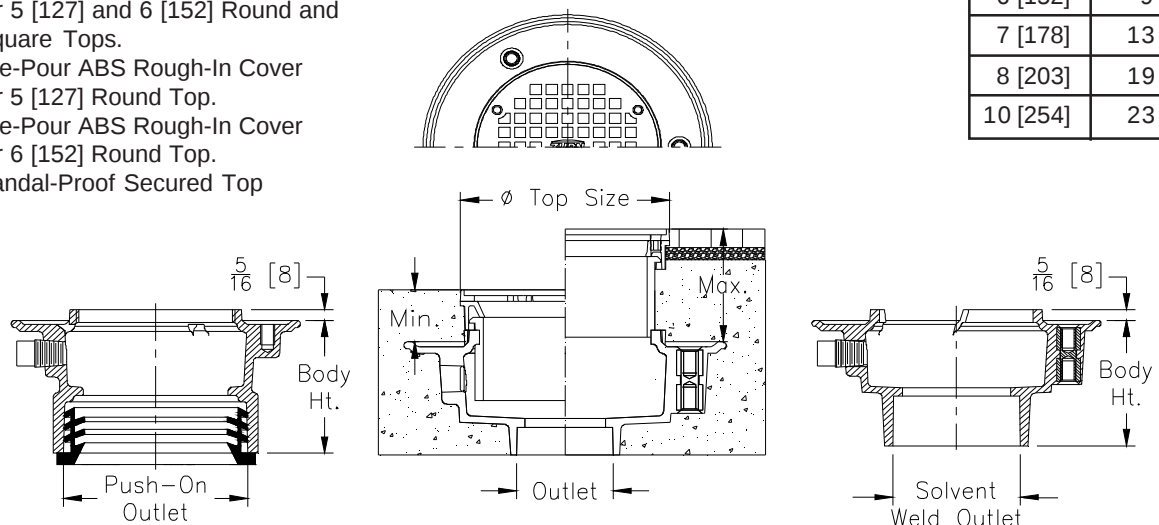

\* Regularly furnished unless otherwise specified.



## Round Adjustable Floor Drain w/ Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

### PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (Cast Iron or ABS) threaded adjustable adaptor, and round Stainless Steel secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

### Top Size and Material - (Pick ONE)

|               |                                    |                                               |
|---------------|------------------------------------|-----------------------------------------------|
| ___ LC-FR05SS | 5 [127] Stainless Steel Top .....  | 1-3/8 [36] Min. 3-1/32 [78] Max. Adjustment   |
| ___ LC-FR06SS | 6 [152] Stainless Steel Top .....  | 1-1/2 [39] Min. 3-3/16 [81] Max. Adjustment   |
| ___ LC-FR07SS | 7 [178] Stainless Steel Top .....  | 1-9/16 [40] Min. 3-3/16 [81] Max. Adjustment  |
| ___ LC-FR08SS | 8 [203] Stainless Steel Top .....  | 1-5/8 [42] Min. 3-9/32 [84] Max. Adjustment   |
| ___ LC-FR10SS | 10 [254] Stainless Steel Top ..... | 1-13/16 [46] Min. 3-7/16 [88] Max. Adjustment |

### Threaded Shank Material - (Pick ONE)

|           |                         |                      |
|-----------|-------------------------|----------------------|
| ___ LC-CS | Cast Iron Adaptor ..... | 4 [102] NPSM Threads |
| ___ LC-PS | ABS Adaptor .....       | 4 [102] NPSM Threads |


### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

|            |               |                            |                             |
|------------|---------------|----------------------------|-----------------------------|
| ___ LC-C2N | D.C.C.I. .... | 4 [102] Body Ht. ....      | 2 [51] No-Hub Outlet        |
| ___ LC-C3N | D.C.C.I. .... | 4 [102] Body Ht. ....      | 3 [76] No-Hub Outlet        |
| ___ LC-C4N | D.C.C.I. .... | 4 [102] Body Ht. ....      | 4 [102] No-Hub Outlet       |
| ___ LC-C2P | D.C.C.I. .... | 4-5/64 [104] Body Ht. .... | 2 [51] Push-On Outlet       |
| ___ LC-C3P | D.C.C.I. .... | 4-3/64 [102] Body Ht. .... | 3 [76] Push-On Outlet       |
| ___ LC-C4P | D.C.C.I. .... | 4-1/64 [102] Body Ht. .... | 4 [102] Push-On Outlet      |
| ___ LC-A2S | ABS ....      | 3-5/64 [78] Body Ht. ....  | 2 [51] Solvent Weld Outlet  |
| ___ LC-A3S | ABS ....      | 3-51/64 [96] Body Ht. .... | 3 [76] Solvent Weld Outlet  |
| ___ LC-A4S | ABS ....      | 4-1/64 [102] Body Ht. .... | 4 [102] Solvent Weld Outlet |
| ___ LC-P2S | PVC ....      | 3-5/64 [78] Body Ht. ....  | 2 [51] Solvent Weld Outlet  |
| ___ LC-P3S | PVC ....      | 3-51/64 [96] Body Ht. .... | 3 [76] Solvent Weld Outlet  |
| ___ LC-P4S | PVC ....      | 4-1/64 [102] Body Ht. .... | 4 [102] Solvent Weld Outlet |


(Check/specify appropriate drain options)

### Suffixes

- \_\_\_ LC-CC Cast Iron Membrane Clamp Collar
- \_\_\_ LC-RC Universal Pre-Pour ABS Rough-In Cover for 5 [127] and 6 [152] Round and Square Tops.
- \_\_\_ LC-RC5 Pre-Pour ABS Rough-In Cover for 5 [127] Round Top.
- \_\_\_ LC-RC6 Pre-Pour ABS Rough-In Cover for 6 [152] Round Top.
- \_\_\_ LC-VP Vandal-Proof Secured Top



| Top Size | Top Open Area<br>Sq. In. [cm <sup>2</sup> ] |
|----------|---------------------------------------------|
| 5 [127]  | 7 [45]                                      |
| 6 [152]  | 10 [65]                                     |
| 7 [178]  | 15 [97]                                     |
| 8 [203]  | 20 [129]                                    |
| 10 [254] | 26 [168]                                    |

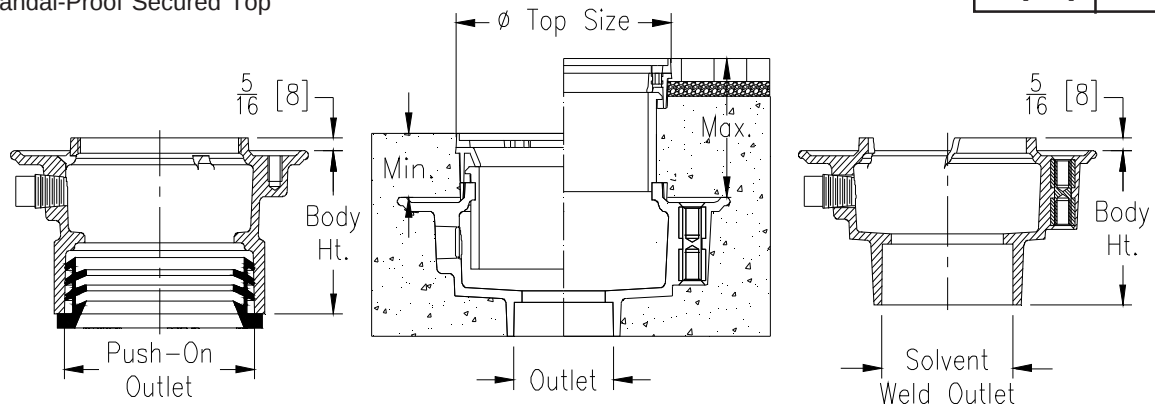

\* Regularly furnished unless otherwise specified.



## Round Adjustable Floor Drain w/ Ductile Iron Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

### PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (Cast Iron or ABS) threaded adjustable adaptor, and round Ductile Iron secured, heavy-duty top with easy snap-on assembly. Materials to be selected as required for application.

### Top Size and Material - (Pick ONE)

\_\_\_ LC-FR05DI 5 [127] Ductile Iron Top ..... 1-19/32 [41] Min. 3-1/8 [80] Max. Adjustment  
\_\_\_ LC-FR08DI 8 [203] Ductile Iron Top ..... 1-23/32 [44] Min. 3-3/8 [86] Max. Adjustment

### Threaded Shank Material - (Pick ONE)

\_\_\_ LC-CS Cast Iron Adaptor ..... 4 [102] NPSM Threads  
\_\_\_ LC-PS ABS Adaptor ..... 4 [102] NPSM Threads


### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

\_\_\_ LC-C2N D.C.C.I. .... 4 [102] Body Ht. .... 2 [51] No-Hub Outlet  
\_\_\_ LC-C3N D.C.C.I. .... 4 [102] Body Ht. .... 3 [76] No-Hub Outlet  
\_\_\_ LC-C4N D.C.C.I. .... 4 [102] Body Ht. .... 4 [102] No-Hub Outlet  
\_\_\_ LC-C2P D.C.C.I. .... 4-5/64 [104] Body Ht. .... 2 [51] Push-On Outlet  
\_\_\_ LC-C3P D.C.C.I. .... 4-3/64 [102] Body Ht. .... 3 [76] Push-On Outlet  
\_\_\_ LC-C4P D.C.C.I. .... 4-1/64 [102] Body Ht. .... 4 [102] Push-On Outlet  
\_\_\_ LC-A2S ABS ..... 3-5/64 [78] Body Ht. .... 2 [51] Solvent Weld Outlet  
\_\_\_ LC-A3S ABS ..... 3-51/64 [96] Body Ht. .... 3 [76] Solvent Weld Outlet  
\_\_\_ LC-A4S ABS ..... 4-1/64 [102] Body Ht. .... 4 [102] Solvent Weld Outlet  
\_\_\_ LC-P2S PVC ..... 3-5/64 [78] Body Ht. .... 2 [51] Solvent Weld Outlet  
\_\_\_ LC-P3S PVC ..... 3-51/64 [96] Body Ht. .... 3 [76] Solvent Weld Outlet  
\_\_\_ LC-P4S PVC ..... 4-1/64 [102] Body Ht. .... 4 [102] Solvent Weld Outlet


(Check/specify appropriate drain options)

### Suffixes

\_\_\_ LC-CC Cast Iron Membrane Clamp Collar  
\_\_\_ LC-RC Universal Pre-Pour ABS Rough-In Cover  
for 5 [127] and 6 [152] Round and  
Square Tops.  
\_\_\_ LC-RC5 Pre-Pour ABS Rough-In Cover  
for 5 [127] Round Top.  
\_\_\_ LC-RC6 Pre-Pour ABS Rough-In Cover  
for 6 [152] Round Top.  
\_\_\_ LC-VP Vandal-Proof Secured Top



| Top Size | Top Open Area<br>Sq. In. [cm <sup>2</sup> ] |
|----------|---------------------------------------------|
| 5 [127]  | 5 [32]                                      |
| 8 [203]  | 18 [116]                                    |

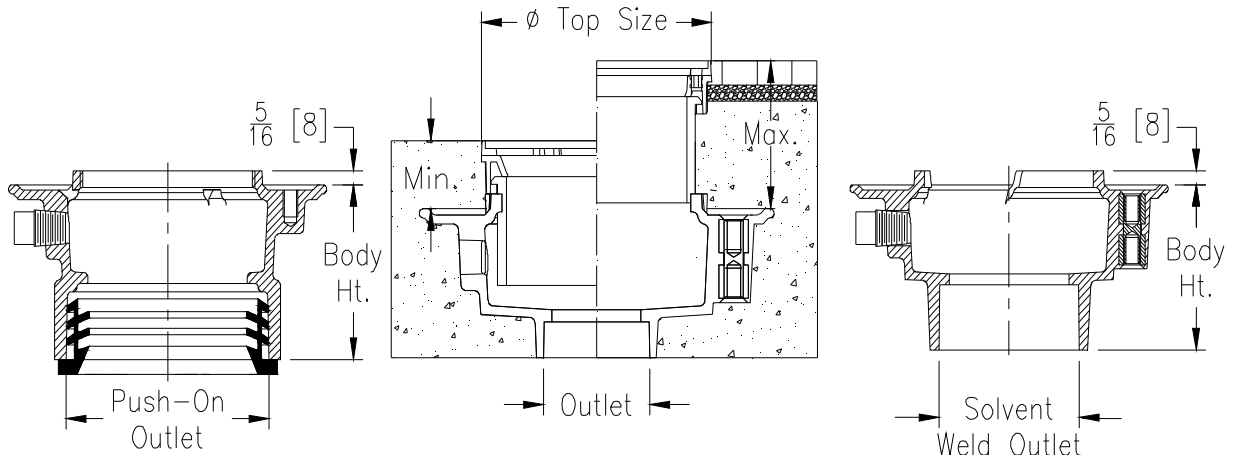

\* Regularly furnished unless otherwise specified.



# Square Adjustable Floor Drain w/ Polished Nickel Bronze, Bronze, or Chrome-Plated Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

## PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (Cast Iron or ABS) threaded adjustable adaptor, and square (Polished Nickel Bronze, Bronze or Chrome-Plated) secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

### Top Size and Material - (Pick ONE)

|               |                   |                            |       |              |                  |                 |
|---------------|-------------------|----------------------------|-------|--------------|------------------|-----------------|
| ___ LC-FS05CP | 5 x 5 [127 x 127] | Chrome-Plated Bronze Top   | ..... | 1-19/32 [41] | Min. 3-1/4 [82]  | Max. Adjustment |
| ___ LC-FS05PB | 5 x 5 [127 x 127] | Polished Bronze Top        | ..... | 1-19/32 [41] | Min. 3-1/4 [82]  | Max. Adjustment |
| ___ LC-FS05NI | 5 x 5 [127 x 127] | Polished Nickel Bronze Top | ..... | 1-19/32 [41] | Min. 3-1/4 [82]  | Max. Adjustment |
| ___ LC-FS06NI | 6 x 6 [152 x 152] | Polished Nickel Bronze Top | ..... | 1-19/32 [41] | Min. 3-1/4 [82]  | Max. Adjustment |
| ___ LC-FS08NI | 8 x 8 [203 x 203] | Polished Nickel Bronze Top | ..... | 1-11/16 [43] | Min. 3-5/16 [84] | Max. Adjustment |

### Threaded Shank Material - (Pick ONE)

|           |                   |       |         |              |
|-----------|-------------------|-------|---------|--------------|
| ___ LC-CS | Cast Iron Adaptor | ..... | 4 [102] | NPSM Threads |
| ___ LC-PS | ABS Adaptor       | ..... | 4 [102] | NPSM Threads |


### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

|            |          |       |         |                |       |         |                     |
|------------|----------|-------|---------|----------------|-------|---------|---------------------|
| ___ LC-C2N | D.C.C.I. | ..... | 4 [102] | Body Ht.       | ..... | 2 [51]  | No-Hub Outlet       |
| ___ LC-C3N | D.C.C.I. | ..... | 4 [102] | Body Ht.       | ..... | 3 [76]  | No-Hub Outlet       |
| ___ LC-C4N | D.C.C.I. | ..... | 4 [102] | Body Ht.       | ..... | 4 [102] | No-Hub Outlet       |
| ___ LC-C2P | D.C.C.I. | ..... | 4-5/64  | [104] Body Ht. | ..... | 2 [51]  | Push-On Outlet      |
| ___ LC-C3P | D.C.C.I. | ..... | 4-3/64  | [102] Body Ht. | ..... | 3 [76]  | Push-On Outlet      |
| ___ LC-C4P | D.C.C.I. | ..... | 4-1/64  | [102] Body Ht. | ..... | 4 [102] | Push-On Outlet      |
| ___ LC-A2S | ABS      | ..... | 3-5/64  | [78] Body Ht.  | ..... | 2 [51]  | Solvent Weld Outlet |
| ___ LC-A3S | ABS      | ..... | 3-51/64 | [96] Body Ht.  | ..... | 3 [76]  | Solvent Weld Outlet |
| ___ LC-A4S | ABS      | ..... | 4-1/64  | [102] Body Ht. | ..... | 4 [102] | Solvent Weld Outlet |
| ___ LC-P2S | PVC      | ..... | 3-5/64  | [78] Body Ht.  | ..... | 2 [51]  | Solvent Weld Outlet |
| ___ LC-P3S | PVC      | ..... | 3-51/64 | [96] Body Ht.  | ..... | 3 [76]  | Solvent Weld Outlet |
| ___ LC-P4S | PVC      | ..... | 4-1/64  | [102] Body Ht. | ..... | 4 [102] | Solvent Weld Outlet |


(Check/specify appropriate drain options)

### Suffixes

- \_\_\_ LC-CC Cast Iron Membrane Clamp Collar
- \_\_\_ LC-RC Universal Pre-Pour ABS Rough-In Cover for 5 [127] and 6 [152] Round and Square Tops.
- \_\_\_ LC-VP Vandal-Proof Secured Top



| Top Size          | Top Open Area<br>Sq. In. [cm²] |
|-------------------|--------------------------------|
| 5 x 5 [127 x 127] | 9 [58]                         |
| 6 x 6 [152 x 152] | 13 [84]                        |
| 8 x 8 [203 x 203] | 27 [174]                       |

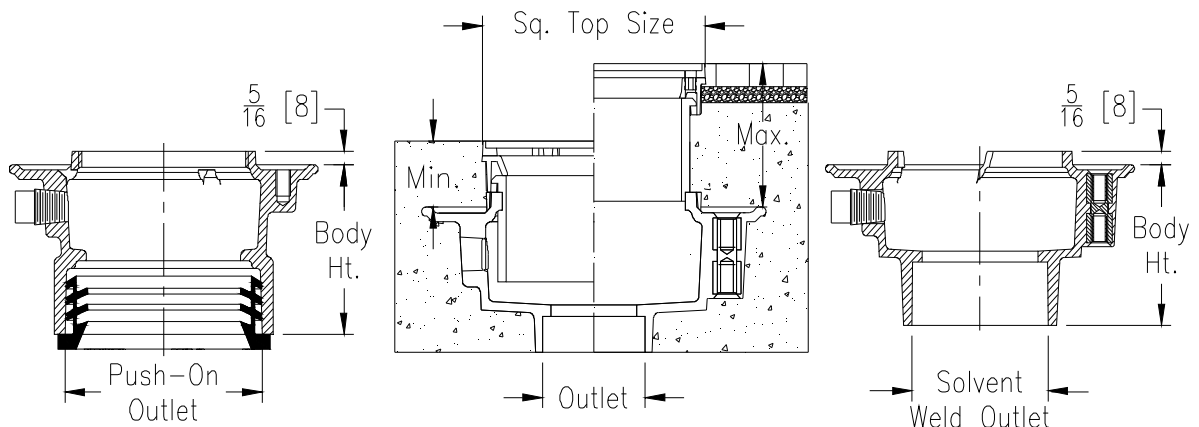

\* Regularly furnished unless otherwise specified.



# Square Adjustable Floor Drain w/ Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

## PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body with plugged 1/2 [13] trap primer connection, (Cast Iron or ABS) threaded adjustable adaptor, and square Stainless Steel secured, light-duty top with easy snap-on assembly. Materials to be selected as required for application.

### Top Size and Material - (Pick ONE)

|               |                   |                     |       |              |                  |                 |
|---------------|-------------------|---------------------|-------|--------------|------------------|-----------------|
| ___ LC-FS05SS | 5 x 5 [127 x 127] | Stainless Steel Top | ..... | 1-19/32 [41] | Min. 3-1/4 [82]  | Max. Adjustment |
| ___ LC-FS06SS | 6 x 6 [152 x 152] | Stainless Steel Top | ..... | 1-19/32 [41] | Min. 3-1/4 [82]  | Max. Adjustment |
| ___ LC-FS08SS | 8 x 8 [203 x 203] | Stainless Steel Top | ..... | 1-11/16 [43] | Min. 3-5/16 [85] | Max. Adjustment |

### Threaded Shank Material - (Pick ONE)

|           |                   |       |         |              |
|-----------|-------------------|-------|---------|--------------|
| ___ LC-CS | Cast Iron Adaptor | ..... | 4 [102] | NPSM Threads |
| ___ LC-PS | ABS Adaptor       | ..... | 4 [102] | NPSM Threads |


### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

|            |          |       |         |                |       |         |                     |
|------------|----------|-------|---------|----------------|-------|---------|---------------------|
| ___ LC-C2N | D.C.C.I. | ..... | 4 [102] | Body Ht.       | ..... | 2 [51]  | No-Hub Outlet       |
| ___ LC-C3N | D.C.C.I. | ..... | 4 [102] | Body Ht.       | ..... | 3 [76]  | No-Hub Outlet       |
| ___ LC-C4N | D.C.C.I. | ..... | 4 [102] | Body Ht.       | ..... | 4 [102] | No-Hub Outlet       |
| ___ LC-C2P | D.C.C.I. | ..... | 4-5/64  | [104] Body Ht. | ..... | 2 [51]  | Push-On Outlet      |
| ___ LC-C3P | D.C.C.I. | ..... | 4-3/64  | [102] Body Ht. | ..... | 3 [76]  | Push-On Outlet      |
| ___ LC-C4P | D.C.C.I. | ..... | 4-1/64  | [102] Body Ht. | ..... | 4 [102] | Push-On Outlet      |
| ___ LC-A2S | ABS      | ..... | 3-5/64  | [78] Body Ht.  | ..... | 2 [51]  | Solvent Weld Outlet |
| ___ LC-A3S | ABS      | ..... | 3-51/64 | [96] Body Ht.  | ..... | 3 [76]  | Solvent Weld Outlet |
| ___ LC-A4S | ABS      | ..... | 4-1/64  | [102] Body Ht. | ..... | 4 [102] | Solvent Weld Outlet |
| ___ LC-P2S | PVC      | ..... | 3-5/64  | [78] Body Ht.  | ..... | 2 [51]  | Solvent Weld Outlet |
| ___ LC-P3S | PVC      | ..... | 3-51/64 | [96] Body Ht.  | ..... | 3 [76]  | Solvent Weld Outlet |
| ___ LC-P4S | PVC      | ..... | 4-1/64  | [102] Body Ht. | ..... | 4 [102] | Solvent Weld Outlet |


(Check/specify appropriate drain options)

### Suffixes

- \_\_\_ LC-CC Cast Iron Membrane Clamp Collar  
\_\_\_ LC-RC Universal Pre-Pour ABS Rough-In Cover for 5 [127] and 6 [152] Round and Square Tops.  
\_\_\_ LC-VP Vandal-Proof Secured Top



| Top Size          | Top Open Area Sq. In. [cm²] |
|-------------------|-----------------------------|
| 5 x 5 [127 x 127] | 8 [52]                      |
| 6 x 6 [152 x 152] | 13 [84]                     |
| 8 x 8 [203 x 203] | 25 [161]                    |

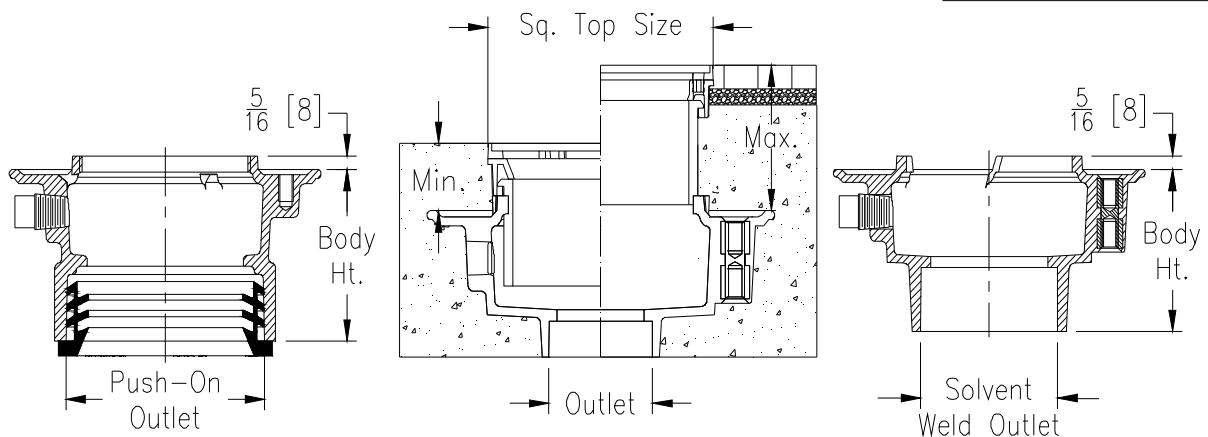

\* Regularly furnished unless otherwise specified.



## Roof Drain w/ Dome and Gravel Guard

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

### PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) drain body, Cast Iron gravel guard, and (Cast Iron or Polypropylene) dome. Material to be selected as required for application.

### Dome and Gravel Guard - (Pick ONE)

- ☐ LC-RD08CI 8 [203] Cast Iron Dome and Gravel Guard  
☐ LC-RD08PL 8 [203] Poly-Dome and Gravel Guard


### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

|                                          |         |                |   |                           |
|------------------------------------------|---------|----------------|---|---------------------------|
| <input type="checkbox"/> LC-C2N D.C.C.I. | 4       | [102] Body Ht. | 2 | [51] No-Hub Outlet        |
| <input type="checkbox"/> LC-C3N D.C.C.I. | 4       | [102] Body Ht. | 3 | [76] No-Hub Outlet        |
| <input type="checkbox"/> LC-C4N D.C.C.I. | 4       | [102] Body Ht. | 4 | [102] No-Hub Outlet       |
| <input type="checkbox"/> LC-C2P D.C.C.I. | 4-5/64  | [104] Body Ht. | 2 | [51] Push-On Outlet       |
| <input type="checkbox"/> LC-C3P D.C.C.I. | 4-3/64  | [102] Body Ht. | 3 | [76] Push-On Outlet       |
| <input type="checkbox"/> LC-C4P D.C.C.I. | 4-1/64  | [102] Body Ht. | 4 | [102] Push-On Outlet      |
| <input type="checkbox"/> LC-A2S ABS      | 3-5/64  | [78] Body Ht.  | 2 | [51] Solvent Weld Outlet  |
| <input type="checkbox"/> LC-A3S ABS      | 3-51/64 | [96] Body Ht.  | 3 | [76] Solvent Weld Outlet  |
| <input type="checkbox"/> LC-A4S ABS      | 4-1/64  | [102] Body Ht. | 4 | [102] Solvent Weld Outlet |
| <input type="checkbox"/> LC-P2S PVC      | 3-5/64  | [78] Body Ht.  | 2 | [51] Solvent Weld Outlet  |
| <input type="checkbox"/> LC-P3S PVC      | 3-51/64 | [96] Body Ht.  | 3 | [76] Solvent Weld Outlet  |
| <input type="checkbox"/> LC-P4S PVC      | 4-1/64  | [102] Body Ht. | 4 | [102] Solvent Weld Outlet |

(Check/specify appropriate drain options)

### Suffixes

- ☐ LC-C Roof Drain Underdeck Clamp  
☐ LC-RS Roof Sump Receiver

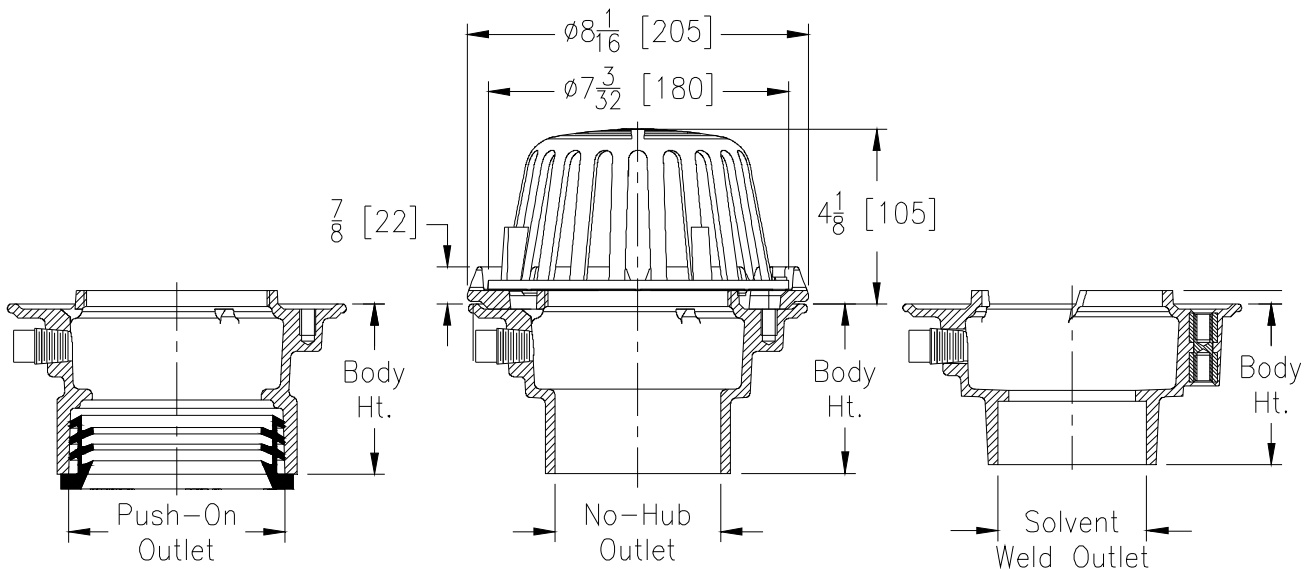

\* Regularly furnished unless otherwise specified.



# Round Adjustable Floor Cleanout w/ Nickel Bronze or Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

## PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) cleanout body, gasketed removable ABS cleanout plug, (Cast Iron or ABS) threaded adjustable adaptor, and round (Polished Nickel Bronze or Stainless Steel) secured, light-duty scoriated top with easy snap-on assembly. Materials to be selected as required for application.

## Top Size and Material - (Pick ONE)

|                                    |         |                            |       |            |                 |                 |
|------------------------------------|---------|----------------------------|-------|------------|-----------------|-----------------|
| <input type="checkbox"/> LC-CR05NI | 5 [127] | Polished Nickel Bronze Top | ..... | 1-3/8 [36] | Min. 3 [78]     | Max. Adjustment |
| <input type="checkbox"/> LC-CR06NI | 6 [152] | Polished Nickel Bronze Top | ..... | 1-1/2 [39] | Min. 3-1/8 [81] | Max. Adjustment |
| <input type="checkbox"/> LC-CR05SS | 5 [127] | Stainless Steel Top        | ..... | 1-3/8 [36] | Min. 3 [78]     | Max. Adjustment |
| <input type="checkbox"/> LC-CR06SS | 6 [152] | Stainless Steel Top        | ..... | 1-1/2 [39] | Min. 3-1/8 [81] | Max. Adjustment |

## Threaded Shank Material - (Pick ONE)

|                                |                   |       |         |              |
|--------------------------------|-------------------|-------|---------|--------------|
| <input type="checkbox"/> LC-CS | Cast Iron Adaptor | ..... | 4 [102] | NPSM Threads |
| <input type="checkbox"/> LC-PS | ABS Adaptor       | ..... | 4 [102] | NPSM Threads |

## Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

|                                 |          |       |         |                     |         |                     |
|---------------------------------|----------|-------|---------|---------------------|---------|---------------------|
| <input type="checkbox"/> LC-C2N | D.C.C.I. | ..... | 4 [102] | Body Ht. ....       | 2 [51]  | No-Hub Outlet       |
| <input type="checkbox"/> LC-C3N | D.C.C.I. | ..... | 4 [102] | Body Ht. ....       | 3 [76]  | No-Hub Outlet       |
| <input type="checkbox"/> LC-C4N | D.C.C.I. | ..... | 4 [102] | Body Ht. ....       | 4 [102] | No-Hub Outlet       |
| <input type="checkbox"/> LC-C2P | D.C.C.I. | ..... | 4-5/64  | [104] Body Ht. .... | 2 [51]  | Push-On Outlet      |
| <input type="checkbox"/> LC-C3P | D.C.C.I. | ..... | 4-3/64  | [102] Body Ht. .... | 3 [76]  | Push-On Outlet      |
| <input type="checkbox"/> LC-C4P | D.C.C.I. | ..... | 4-1/64  | [102] Body Ht. .... | 4 [102] | Push-On Outlet      |
| <input type="checkbox"/> LC-A2S | ABS      | ..... | 3-5/64  | [78] Body Ht. ....  | 2 [51]  | Solvent Weld Outlet |
| <input type="checkbox"/> LC-A3S | ABS      | ..... | 3-51/64 | [96] Body Ht. ....  | 3 [76]  | Solvent Weld Outlet |
| <input type="checkbox"/> LC-A4S | ABS      | ..... | 4-1/64  | [102] Body Ht. .... | 4 [102] | Solvent Weld Outlet |
| <input type="checkbox"/> LC-P2S | PVC      | ..... | 3-5/64  | [78] Body Ht. ....  | 2 [51]  | Solvent Weld Outlet |
| <input type="checkbox"/> LC-P3S | PVC      | ..... | 3-51/64 | [96] Body Ht. ....  | 3 [76]  | Solvent Weld Outlet |
| <input type="checkbox"/> LC-P4S | PVC      | ..... | 4-1/64  | [102] Body Ht. .... | 4 [102] | Solvent Weld Outlet |





## Plug Size - (Pick ONE) - Must match outlet size

|                                |         |               |
|--------------------------------|---------|---------------|
| <input type="checkbox"/> LC-2P | 2 [51]  | Cleanout Plug |
| <input type="checkbox"/> LC-3P | 3 [76]  | Cleanout Plug |
| <input type="checkbox"/> LC-4P | 4 [102] | Cleanout Plug |

(Check/specify appropriate drain options)

## Suffixes

|                                 |                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------|
| <input type="checkbox"/> LC-CC  | Cast Iron Membrane Clamp Collar                                                            |
| <input type="checkbox"/> LC-RC  | Universal Pre-Pour ABS Rough-In Cover<br>for 5 [127] and 6 [152] Round and<br>Square Tops. |
| <input type="checkbox"/> LC-RC5 | Pre-Pour ABS Rough-In Cover<br>for 5 [127] Round Top.                                      |
| <input type="checkbox"/> LC-RC6 | Pre-Pour ABS Rough-In Cover<br>for 6 [152] Round Top.                                      |
| <input type="checkbox"/> LC-VP  | Vandal-Proof Secured Top                                                                   |

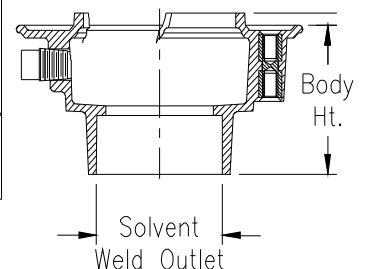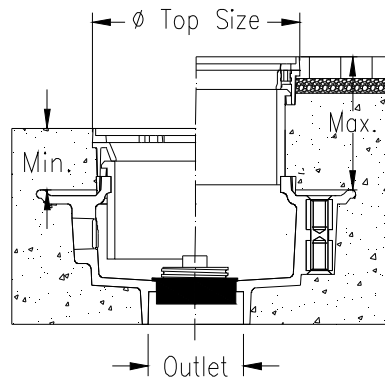

\* Regularly furnished unless otherwise specified.



# Round Adjustable Floor Cleanout w/ Ductile Iron Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

## PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) cleanout body, gasketed removable ABS cleanout plug, (Cast Iron or ABS) threaded adjustable adaptor, and round Ductile Iron secured, heavy-duty scoriated top with easy snap-on assembly. Materials to be selected as required for application.

## Top Size and Material - (Pick ONE)

\_\_\_ LC-CR05DI 5 [127] Ductile Iron Top ..... 1-19/32 [41] Min. 3-1/8 [80] Max. Adjustment

## Threaded Shank Material - (Pick ONE)

\_\_\_ LC-CS Cast Iron Adaptor ..... 4 [102] NPSM Threads  
\_\_\_ LC-PS ABS Adaptor ..... 4 [102] NPSM Threads

## Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

\_\_\_ LC-C2N D.C.C.I. .... 4 [102] Body Ht. .... 2 [51] No-Hub Outlet  
\_\_\_ LC-C3N D.C.C.I. .... 4 [102] Body Ht. .... 3 [76] No-Hub Outlet  
\_\_\_ LC-C4N D.C.C.I. .... 4 [102] Body Ht. .... 4 [102] No-Hub Outlet  
\_\_\_ LC-C2P D.C.C.I. .... 4-5/64 [104] Body Ht. .... 2 [51] Push-On Outlet  
\_\_\_ LC-C3P D.C.C.I. .... 4-3/64 [102] Body Ht. .... 3 [76] Push-On Outlet  
\_\_\_ LC-C4P D.C.C.I. .... 4-1/64 [102] Body Ht. .... 4 [102] Push-On Outlet  
\_\_\_ LC-A2S ABS ..... 3-5/64 [78] Body Ht. .... 2 [51] Solvent Weld Outlet  
\_\_\_ LC-A3S ABS ..... 3-51/64 [96] Body Ht. .... 3 [76] Solvent Weld Outlet  
\_\_\_ LC-A4S ABS ..... 4-1/64 [102] Body Ht. .... 4 [102] Solvent Weld Outlet  
\_\_\_ LC-P2S PVC ..... 3-5/64 [78] Body Ht. .... 2 [51] Solvent Weld Outlet  
\_\_\_ LC-P3S PVC ..... 3-51/64 [96] Body Ht. .... 3 [76] Solvent Weld Outlet  
\_\_\_ LC-P4S PVC ..... 4-1/64 [102] Body Ht. .... 4 [102] Solvent Weld Outlet



## Plug Size - (Pick ONE) - Must match outlet size

\_\_\_ LC-2P 2 [51] Cleanout Plug  
\_\_\_ LC-3P 3 [76] Cleanout Plug  
\_\_\_ LC-4P 4 [102] Cleanout Plug

(Check/specify appropriate drain options)

## Suffixes

\_\_\_ LC-CC Cast Iron Membrane Clamp Collar  
\_\_\_ LC-RC Universal Pre-Pour ABS Rough-In Cover for 5 [127] and 6 [152] Round and Square Tops.  
\_\_\_ LC-RC5 Pre-Pour ABS Rough-In Cover for 5 [127] Round Top.  
\_\_\_ LC-RC6 Pre-Pour ABS Rough-In Cover for 6 [152] Round Top.  
\_\_\_ LC-VP Vandal-Proof Secured Top

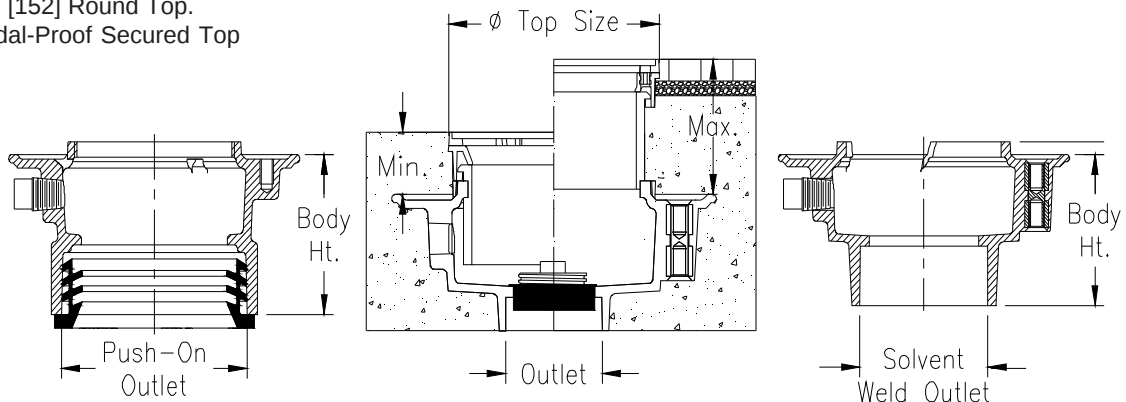

\* Regularly furnished unless otherwise specified.



# Square Adjustable Floor Cleanout w/ Polished Nickel Bronze or Stainless Steel Top

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

## PRODUCT DESCRIPTION:

(Dura-Coated Cast Iron, ABS, or PVC) cleanout body, gasketed removable ABS cleanout plug, (Cast Iron or ABS) threaded adjustable adaptor, and square (Polished Nickel Bronze or Stainless Steel) secured, light-duty scoriated top with easy snap-on assembly. Materials to be selected as required for application.

### Top Size and Material - (Pick ONE)

|               |                   |                            |                                                     |
|---------------|-------------------|----------------------------|-----------------------------------------------------|
| ___ LC-CS05NI | 5 x 5 [127 x 127] | Polished Nickel Bronze Top | ..... 1-19/32 [41] Min. 3-7/32 [82] Max. Adjustment |
| ___ LC-CS06NI | 6 x 6 [152 x 152] | Polished Nickel Bronze Top | ..... 1-19/32 [41] Min. 3-7/32 [82] Max. Adjustment |
| ___ LC-CS05SS | 5 x 5 [127 x 127] | Stainless Steel Top        | ..... 1-19/32 [41] Min. 3-7/32 [82] Max. Adjustmet  |
| ___ LC-CS06SS | 6 x 6 [152 x 152] | Stainless Steel Top        | ..... 1-19/32 [41] Min. 3-7/32 [82] Max. Adjustmet  |

### Threaded Shank Material - (Pick ONE)

|           |                   |                            |
|-----------|-------------------|----------------------------|
| ___ LC-CS | Cast Iron Adaptor | ..... 4 [102] NPSM Threads |
| ___ LC-PS | ABS Adaptor       | ..... 4 [102] NPSM Threads |

### Drain Body Material / Outlet Size / Outlet Type - (Pick ONE)

|            |          |                             |                                   |
|------------|----------|-----------------------------|-----------------------------------|
| ___ LC-C2N | D.C.C.I. | ..... 4 [102] Body Ht.      | ..... 2 [51] No-Hub Outlet        |
| ___ LC-C3N | D.C.C.I. | ..... 4 [102] Body Ht.      | ..... 3 [76] No-Hub Outlet        |
| ___ LC-C4N | D.C.C.I. | ..... 4 [102] Body Ht.      | ..... 4 [102] No-Hub Outlet       |
| ___ LC-C2P | D.C.C.I. | ..... 4-5/64 [104] Body Ht. | ..... 2 [51] Push-On Outlet       |
| ___ LC-C3P | D.C.C.I. | ..... 4-3/64 [102] Body Ht. | ..... 3 [76] Push-On Outlet       |
| ___ LC-C4P | D.C.C.I. | ..... 4-1/64 [102] Body Ht. | ..... 4 [102] Push-On Outlet      |
| ___ LC-A2S | ABS      | ..... 3-5/64 [78] Body Ht.  | ..... 2 [51] Solvent Weld Outlet  |
| ___ LC-A3S | ABS      | ..... 3-51/64 [96] Body Ht. | ..... 3 [76] Solvent Weld Outlet  |
| ___ LC-A4S | ABS      | ..... 4-1/64 [102] Body Ht. | ..... 4 [102] Solvent Weld Outlet |
| ___ LC-P2S | PVC      | ..... 3-5/64 [78] Body Ht.  | ..... 2 [51] Solvent Weld Outlet  |
| ___ LC-P3S | PVC      | ..... 3-51/64 [96] Body Ht. | ..... 3 [76] Solvent Weld Outlet  |
| ___ LC-P4S | PVC      | ..... 4-1/64 [102] Body Ht. | ..... 4 [102] Solvent Weld Outlet |



### Plug Size - (Pick ONE) - Must match outlet size

|           |                       |
|-----------|-----------------------|
| ___ LC-2P | 2 [51] Cleanout Plug  |
| ___ LC-3P | 3 [76] Cleanout Plug  |
| ___ LC-4P | 4 [102] Cleanout Plug |

(Check/specify appropriate drain options)

### Suffixes

|           |                                                                                            |
|-----------|--------------------------------------------------------------------------------------------|
| ___ LC-CC | Cast Iron Membrane Clamp Collar                                                            |
| ___ LC-RC | Universal Pre-Pour ABS Rough-In Cover<br>for 5 [127] and 6 [152] Round and<br>Square Tops. |
| ___ LC-VP | Vandal-Proof Secured Top                                                                   |

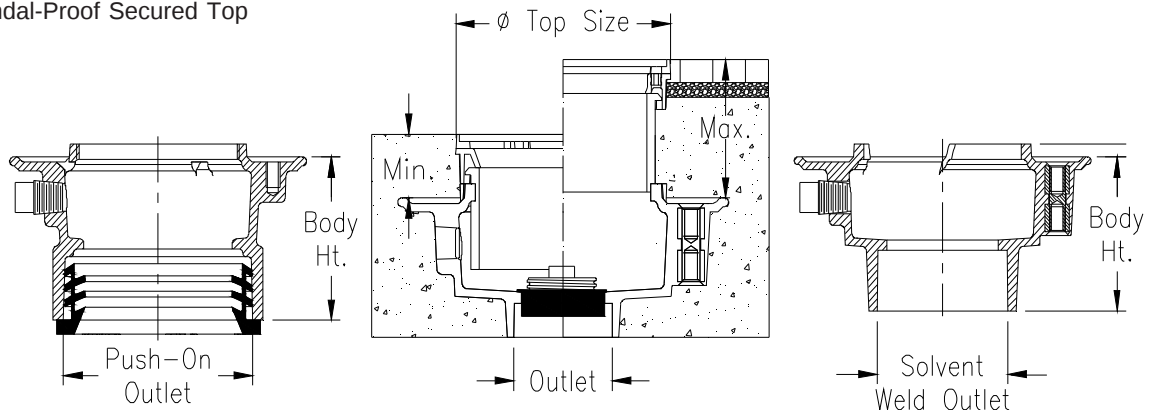

\* Regularly furnished unless otherwise specified.



## Rough-In Adapter Cover


Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

### PRODUCT DESCRIPTION:

(ABS, or PVC) Rough-In adapter cover rain xxx. Materials to be selected as required for application.

### Cover Size - (Pick ONE)

- |                                 |                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------|
| <input type="checkbox"/> LC-RC  | Universal Pre-Pour ABS Rough-In Cover for 5 [127] and 6 [152] Round and Square Tops. |
| <input type="checkbox"/> LC-RC5 | Pre-Pour ABS Rough-In Cover for 5 [127] Round Top.                                   |
| <input type="checkbox"/> LC-RC6 | Pre-Pour ABS Rough-In Cover for 6 [152] Round Top.                                   |

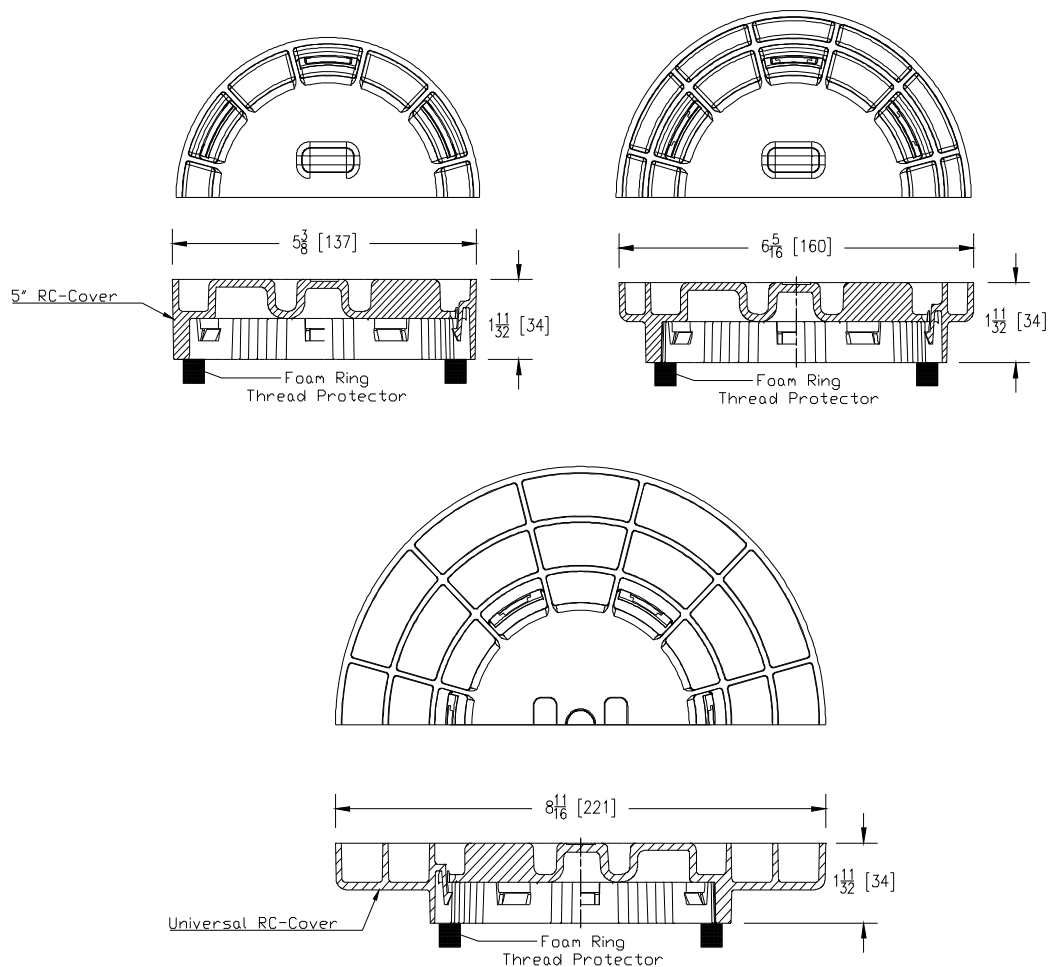

\* Regularly furnished unless otherwise specified.