



BRASS BODY • FULL PORT • FLARE X FIP

Features

- Forged Brass Body
- Stainless Steel Ball
- Aluminum Alloy Handle

Specifications & Approvals

600 psi WOG 175 psi WSP
 Temperature Range: -4°F to 149°F
 Ends Conform to: ANSI B1.20.1
 CSA Approved: ANSI Z21.15/CSA 9.1(1/2psi)
 ASME B16.44 / CR91-002 (5psi)
 ASME B16.33 / CGA3.16 (175psi)
 UL Listed per: UL 125 (Guide YSDT) 125 WOG

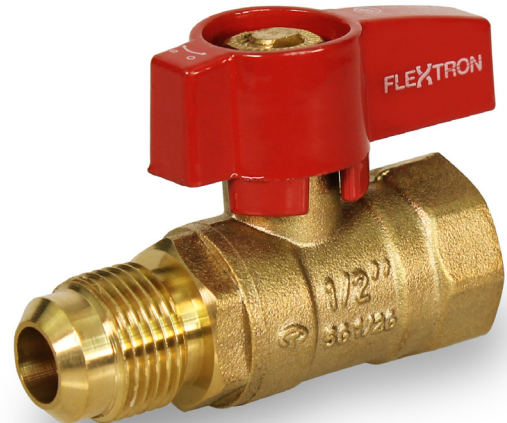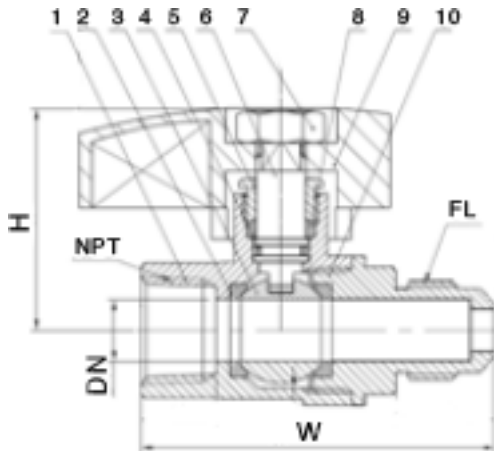

Dimensions



Part#	Size	H	W	DN	FL
FTGV-38R12F	3/8" x 1/2"	36.5	60.5	10	5/8" UNF
FTGV-12R12F	1/2" x 1/2"	36.5	64	10	3/4" UNF
FTGV-58R12F	5/8" x 1/2"	36.5	67	10	15/16" UNF
FTGV-58R34F	5/8" x 3/4"	39	72.5	15	15/16" UNF

Material Specifications

Part Name	Material
1. Body	Brass
2. Seat	PTFE
3. Ball	Brass
4. O-Ring	NBR
5. Packing Nut	Brass
6. Stem	Brass
7. Handle Nut	Plated Steel
8. Packing	PTFE
9. Handle	Al Alloy
10. Cap	Brass