


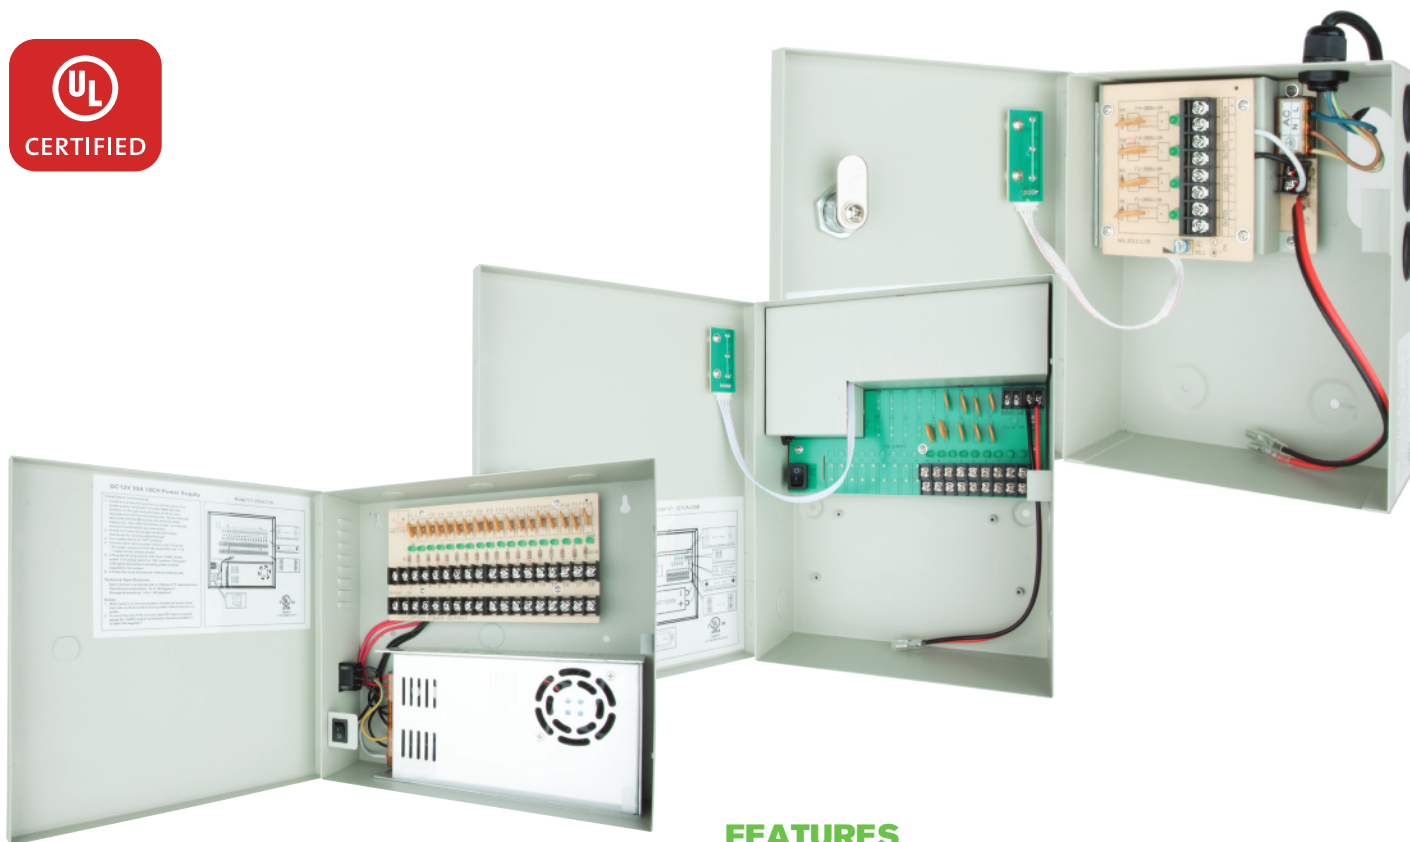

### FEATURES

- 12VDC Multi-Output
- 4 to 18-Output Terminal strip connection
- UL Approved
- 5~30 Amp Output
- PTC (Resettable) Fuse
- Power indicator light on battery back-up units
- Lifetime Warranty

| Detailed Specifications | VT-1205A-D4B                         | VT-1210A-D9B                         | VT-1230A-D18                           |
|-------------------------|--------------------------------------|--------------------------------------|----------------------------------------|
| Input Voltage           | 110 ~ 220VAC                         | 110 ~ 220VAC                         | 110 ~ 220VAC                           |
| Input Voltage Frequency | 50/60Hz                              | 50/60Hz                              | 50/60Hz                                |
| Output Voltage          | 12VDC +/-10%                         | 12VDC +/-10%                         | 12VDC +/-5%                            |
| Total Output Current    | 5A                                   | 10A                                  | 30A                                    |
| Total Outputs           | 4 Channels                           | 9 Channels                           | 18 Channels                            |
| Fuse Type               | PTC (Resettable) Fuse                | PTC (Resettable) Fuse                | PTC (Resettable) Fuse                  |
| Fuse Rating             | 1.6A                                 | 1.6A                                 | 1.85A                                  |
| Battery Backup          | 7AH Battery (Optional)               | 7AH Battery (Optional)               | N/A                                    |
| Dimensions              | 8.66" x 7.09" x 3.15" (220x180x80mm) | 8.66" x 7.87" x 2.76" (220x200x70mm) | 10.63" x 10.24" x 3.15" (270x260x80mm) |
| Weight                  | 3.09 Lbs. (1.4KG)                    | 3.31 Lbs. (1.5KG)                    | 5.95 Lbs. (2.7KG)                      |