KVT 80 split cable gland

for cables with connectors, suitable on cut-out M80 / IP54 / UL Type 12















The KVT 80 split cable glands are designed for routing and sealing cables with connectors. But also electric, pneumatic or hydraulic lines without terminals or connectors as well as corrugated conduits can be easily routed (e.g. into control panels, enclosures or machinery) and sealed with IP54 / UL Type 12.

By assembling the two frame halves with the screws provided, the grommets provide sufficient pressure on the routed cables to obtain a high degree of strain relief. By using multi-hole grommets up to 24 lines can be routed with one cable gland. The KVT 80 can be fitted to a wall thickness from 1.5 mm to 10 mm. A flat rubber gasket is included in the shipment.

Note:

When mounting the KVT 80 on sheet metal, we recommend the following torque values:

1.5 mm sheet = 1 Nm | 2 - 10 mm sheet = 1.5 Nm

Specifications

IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Polycarbonate
Flame class	UL94-V0, self-extinguishing
Operating temperature	-30 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & Benefits

Routing of cables with and without connectors

Warranty on pre-terminated cables remains

Retrofits, repairs and maintenance can be done much more easily and quickly

High cable density, wide variety of grommets

Fast and easy mounting from the front side

Strain relief according to EN 62444

Product types & Sizes





Part No. FAN

PU

Color

For max. no. of cables 24 Max. cable diameter 17 mm

grau (ähnlich RAL 7035)

45237

4251269311376

External diameter 100 mm Mounting height Cut-out size, metric

Suitable for grommets

16 mm M80

6 x KT small

KVT 80|6 bk



Part No. EAN PU

For max. no. of cables Max. cable diameter Color External diameter

schwarz

100 mm

Mounting height Cut-out size, metric Suitable for grommets 16 mm 6 x KT small

KVT 80|3 gy



Part No. EAN PU

For max. no. of cables Max. cable diameter

Color

External diameter

45236 4251269311369

1

9

35 mm grau (ähnlich RAL 7035)

100 mm

Mounting height
Cut-out size, metric
Suitable for grommets

16 mm M80

2 x KT small 1 x KT large

KVT 80|3 bk



Part No. EAN

PU

For max. no. of cables Max. cable diameter

Color

External diameter

45239

4251269311390


1

9 35 mm

schwarz 100 mm Mounting height
Cut-out size, metric
Suitable for grommets

16 mm M80

2 x KT small 1 x KT large

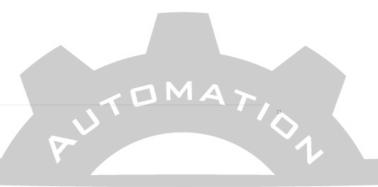

APEX

