



7/8" MIN Series Size I "T" Connectors  
3, 4, 5 & 6 Conductor MIN Series Size I "T" Connector, 16AWG



"T" Connectors | Male to Two Female | 300 Volt, 8 amps | IP69 Rating



A


MIN Series Size I Cordsets

# of Poles	Male Faceview	Part Number	Wiring	Female Faceview
3	 7/8"-16UN2	MIN-3MFF-T	1 to 1 to 1 2 to 2 to 2 3 to 3 to 3	 7/8"-16UN2
4	 7/8"-16UN2	MIN-4MFF-T	1 to 1 to 1 2 to 2 to 2 3 to 3 to 3 4 to 4 to 4	 7/8"-16UN2
5	 7/8"-16UN2	MIN-5MFF-T	1 to 1 to 1 2 to 2 to 2 3 to 3 to 3 4 to 4 to 4 5 to 5 to 5	 7/8"-16UN2
6	 7/8"-16UN2	MIN-6MFF-T	1 to 1 to 1 2 to 2 to 2 3 to 3 to 3 4 to 4 to 4 5 to 5 to 5 6 to 6 to 6	 7/8"-16UN2

Standard coupling nut is nickel plated brass, for stainless steel coupling nut add a "-SS" suffix. (e.g. MIN-4MFF-T becomes MIN-4MFF-T-SS)

Specifications:

- Body : Oil Resistant Yellow PVC  
Contacts : Copper Alloy with Gold Plating  
Coupling Nut : Nickel Plated Brass  
Temperature : -40°C to +105°C

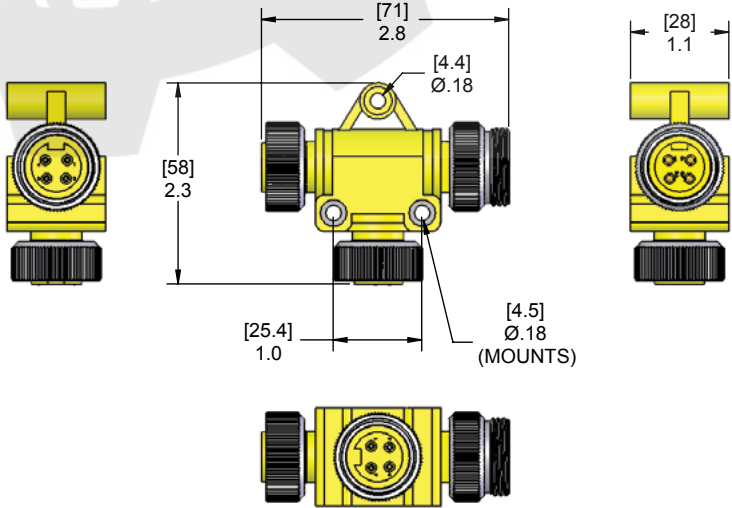

ALL THREADS 7/8-16 UN