PIN #	COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK

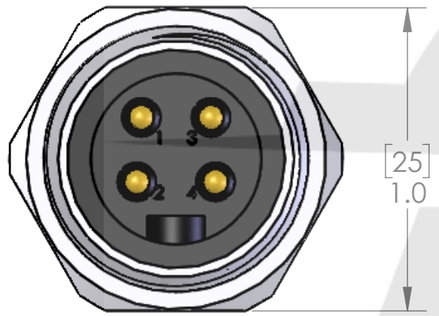

[25]
1.0

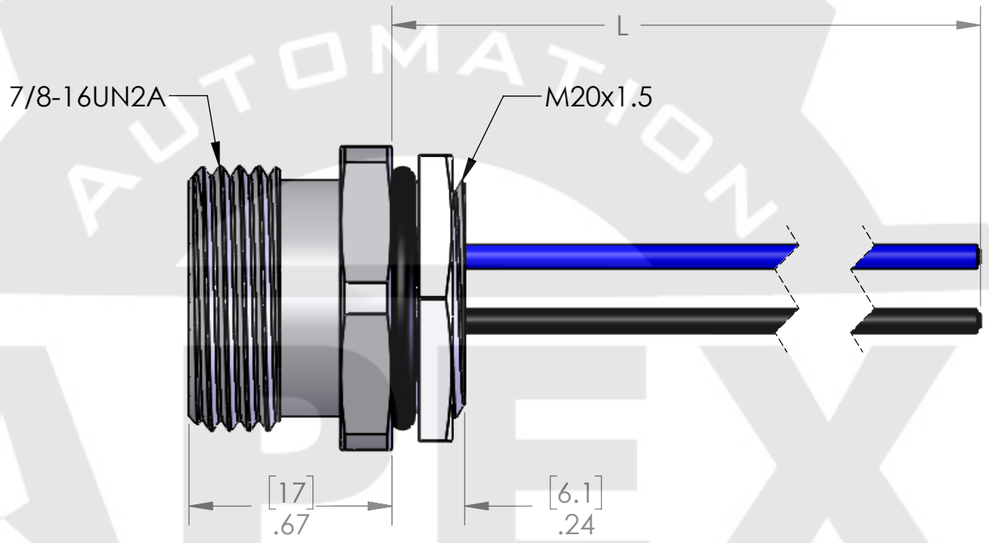

TABLE A	
P/N	L
MINC-4MR-0.5M-18-M20	20" [0.5M]
MINC-4MR-0.6M-18-M20	24" [0.6M]
MINC-4MR-1M-18-M20	40" [1M]
MINC-4MR-2M-18-M20	79" [2M]
MINC-4MR-3M-18-M20	118" [3M]
MINC-4MR-4M-18-M20	157" [4M]
MINC-4MR-5M-18-M20	197" [5M]
MINC-4MR-6M-18-M20	237" [6M]

OTHER LENGTHS AVAILABLE
PLEASE CONSULT FACTORY

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL1007/1569
AWG:	18/4
JACKET:	PVC
VOLTAGE:	300V
INSERT:	BLACK PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	APR
DRAWN DATE	05/25/2022
CHECKED BY	JJH
CHECK DATE	05/25/2022

COMMENTS:

MENCOM CORPORATION

TITLE:

4 PL MIN ML RECP

SIZE	DWG. NO.	REV
B	MINC-4MR-ZZ-18-M20	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1