
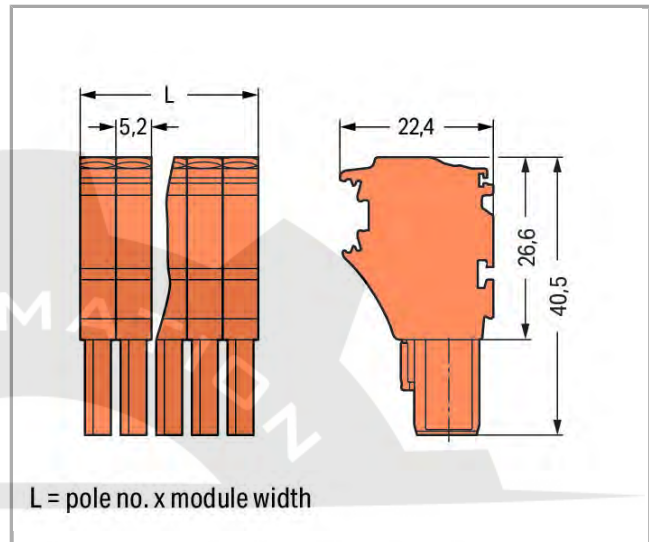


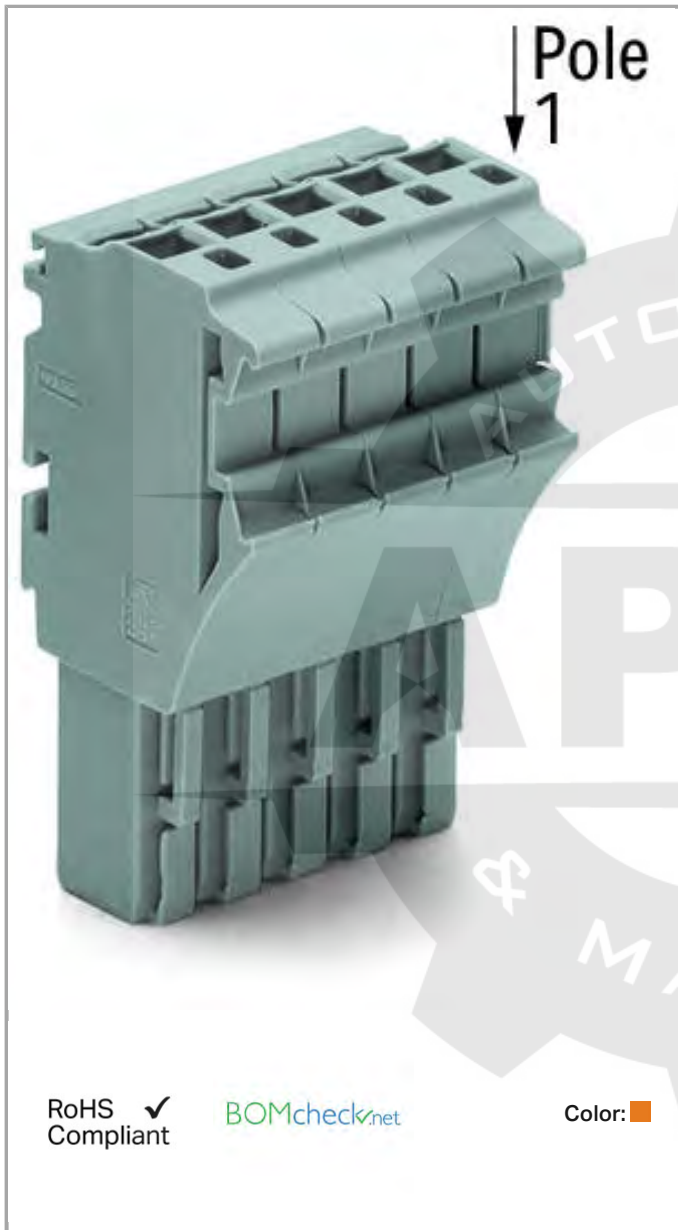

Item description

According to EN 61984, pluggable connectors without current interrupting capacity shall not be mated and unmated when live or under load.

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	690 V
Rated impulse voltage (III / 3)	6 kV
Rated current	24 A
Rated current (2)	32 A

Connection data

Connection technology	Push-in CAGE CLAMP®
Actuation type	Open Tool Slot Push-in
Connectable conductor materials	Copper
Nominal cross section	2.5 mm²
Solid conductor	0.25 4 mm² / 22 12 AWG
Solid conductor, push-in termination	0.75 4 mm² / 18 12 AWG
Fine-stranded conductor	0.25 4 mm² / 22 12 AWG
Strip length	10 12 mm / 0.39 0.47 inch
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.
Total number of connection points	8
Total number of potentials	8
Type of wiring	Front-entry wiring
No. of poles	8

Geometrical Data

Width	41.6 mm / 1.638 inch
Height	40.5 mm / 1.594 inch
Depth	22.4 mm / 0.882 inch
Module width	5.2 mm / 0.205 inch

Mechanical data

Marking level	Side marking
---------------	--------------

Plug connection

Contact type (pluggable connector)	Female connector/socket
Connector connection type	for conductors

Material Data

Color	orange
Insulating material	Polyamide 66 (PA 66)

Fire load	0.431 MJ
Weight	26.31 g

Commercial data

Product Group	18 (X-COM-System)
Country of origin	DE
GTIN	4045454971090
Customs Tariff No.	85366990990

Compatible products

tools



Item no.: 210-720
 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft

210-720

ferrule



Item no.: 216-241
 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

216-241

Downloads

Documentation

Bid Text

2022-108/000-012	docx 15.5 kB	Download
------------------	-----------------	----------

Additional Information

Technical explanations	Apr 3, 2019 pdf 2.1 MB	Download
------------------------	------------------------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 2022-108/000-012	URL	Download
------------------------------	-----	----------

EPLAN

EPLAN Data Portal	Download
-------------------	----------

WSCAD

WSCAD Universe	Download
----------------	----------

Product family

X-COM S

Show all products from the family



Subject to changes.
