



## Data sheet | Item number: 2102-5301

3-conductor through terminal block; with lever and push-button; 2.5 mm<sup>2</sup>;  
with test port; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5;  
Push-in CAGE CLAMP®; 2,50 mm<sup>2</sup>; gray

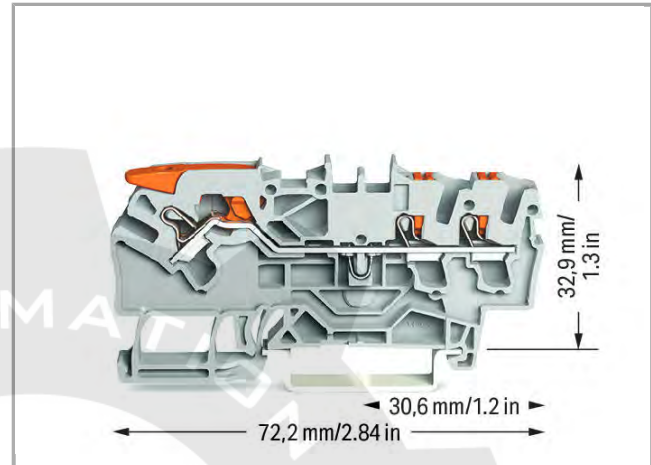

2102-5301

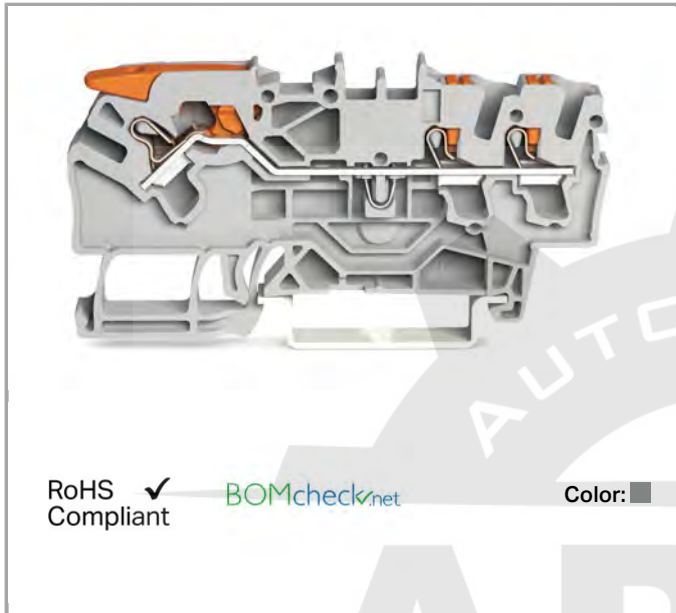

RoHS ☒   
Compliant

BOMcheck.net

Color:



### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 800 V |
| Rated impulse voltage (III / 3) | 8 kV  |
| Rated current                   | 24 A  |

|                   |      |
|-------------------|------|
| Rated current (2) | 30 A |
|-------------------|------|

## Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 600 V |
| Rated current CSA (Use Group B) | 20 A  |
| Rated voltage CSA (Use Group C) | 600 V |
| Rated current CSA (Use Group C) | 20 A  |

## Connection data

|                                      |                                                                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                       | Push-in<br>Lever<br>Push-button                                                                                                   |
| Connectable conductor materials      | Copper                                                                                                                            |
| Nominal cross section                | 2.5 mm²                                                                                                                           |
| Solid conductor                      | 0.25 4 mm² / 22 12 AWG                                                                                                            |
| Solid conductor, push-in termination | 0.75 4 mm² / 18 12 AWG                                                                                                            |
| Fine-stranded conductor              | 0.25 4 mm² / 22 12 AWG                                                                                                            |
| Strip length                         | 10 12 mm / 0.39 0.47 inch                                                                                                         |
| Note (conductor cross-section)       | Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination. |
| Total number of connection points    | 3                                                                                                                                 |
| Total number of potentials           | 1                                                                                                                                 |
| Number of levels                     | 1                                                                                                                                 |
| Type of wiring                       | Front-entry wiring                                                                                                                |
| Number of jumper slots               | 2                                                                                                                                 |
| Actuation type 2                     | Push-in<br>Push-button<br>Operating tool                                                                                          |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 5.2 mm / 0.205 inch  |
| Height from upper-edge of DIN-35 rail | 32.9 mm / 1.295 inch |
| Depth                                 | 72.2 mm / 2.843 inch |

## Mechanical data

|                  |                     |
|------------------|---------------------|
| Design           | horizontal          |
| Type of mounting | DIN-35 rail         |
| Marking level    | Center/side marking |

## Material Data

|                     |                      |
|---------------------|----------------------|
| Color               | gray                 |
| Insulating material | Polyamide 66 (PA 66) |
| Weight              | 8.142 g              |

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4055143741927 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                       | Additional Approval Text | Certificate name         |
|------------------------------------------------------------------------------------|------------------------------------------------|--------------------------|--------------------------|
|    | AEx<br>Underwriters Laboratories Inc.          | UL 60079                 | 20181105-E185892         |
|  | AEx<br>Underwriters Laboratories Inc.          | UL 60079                 | 20181105-E185892         |
|  | ATEX<br>Physikalisch Technische Bundesanstalt  | EN 60079-0               | PTB 18<br>ATEX<br>1010 U |
|  | ATEX<br>Physikalisch Technische Bundesanstalt  | EN 60079-0               | PTB 18<br>ATEX<br>1010 U |
|  | IECEx<br>Physikalisch Technische Bundesanstalt | IEC 60079-0              | IECEx PTB<br>18.0017U    |
|  | IECEx<br>Physikalisch Technische Bundesanstalt | IEC 60079-0              | IECEx PTB<br>18.0017U    |

### Radio-Approvals

| Logo | Approval                        | Additional Approval Text | Certificate name |
|------|---------------------------------|--------------------------|------------------|
|      | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL<br>7670   |

CCA



CSA  
DEKRA Certification B.V.

C22.2

70175030



KEMA/KEUR  
DEKRA Certification B.V.

EN 60947

71-  
102882

#### Country specific Approvals

| Logo                                                                             | Approval                        | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL<br>7670   |



CSA  
DEKRA Certification B.V.

C22.2

70175030



KEMA/KEUR  
DEKRA Certification B.V.

EN 60947

71-  
102882

#### Ship Approvals

| Logo                                                                                | Approval                                         | Additional Approval Text | Certificate name        |
|-------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|-------------------------|
|   | ABS<br>American Bureau of Shipping               | -                        | 9-<br>HG1866350-<br>PDA |
|   | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00003JT              |
|  | LR<br>Lloyds Register                            | -                        | 19/20050                |

#### Other Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|----------|--------------------------|------------------|
|------|----------|--------------------------|------------------|



cURus  
Underwriters Laboratories Inc.

UL 1059

E45172

## UL-Approvals

| Logo                                                                             | Approval                                | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|-----------------------------------------|--------------------------|------------------|
|  | cURus<br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |

## Compatible products

### Jumper

|                                                                                    |                                                                                                                           |          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------|
|  | <b>Item no.: 2002-400</b><br>Adjacent jumper for continuous commoning; insulated; 2-way; Nominal current 25 A; light gray | 2002-400 |
|  | <b>Item no.: 2002-402</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 25 A; light gray                  | 2002-402 |
|  | <b>Item no.: 2002-402/000-005</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 25 A; red                 | 2002-402 |
|  | <b>Item no.: 2002-402/000-006</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 25 A; blue                | 2002-402 |
|  | <b>Item no.: 2002-403</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 25 A; light gray                  | 2002-403 |
|  | <b>Item no.: 2002-403/000-005</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 25 A; red                 | 2002-403 |
|  | <b>Item no.: 2002-403/000-006</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 25 A; blue                | 2002-403 |
|  | <b>Item no.: 2002-404</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; light gray                  | 2002-404 |

|                                                                                    |                                                                                                               |            |          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------|----------|
|    | Item no.: 2002-404/000-005<br>Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; red            | /0000-0005 | 2002-404 |
|    | Item no.: 2002-404/000-006<br>Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; blue           | /0000-0006 | 2002-404 |
|    | Item no.: 2002-405<br>Push-in type jumper bar; insulated; 5-way; Nominal current 25 A; light gray             |            | 2002-405 |
|    | Item no.: 2002-405/000-005<br>Push-in type jumper bar; insulated; 5-way; Nominal current 25 A; red            | /0000-0005 | 2002-405 |
|    | Item no.: 2002-405/000-006<br>Push-in type jumper bar; insulated; 5-way; Nominal current 25 A; blue           | /0000-0006 | 2002-405 |
|    | Item no.: 2002-405/011-000<br>Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block; light gray | /0111-0000 | 2002-405 |
|    | Item no.: 2002-406<br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A; light gray             |            | 2002-406 |
|  | Item no.: 2002-406/000-005<br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A; red            | /0000-0005 | 2002-406 |
|  | Item no.: 2002-406/000-006<br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A; blue           | /0000-0006 | 2002-406 |
|  | Item no.: 2002-406/020-000<br>Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block; light gray        | /0200-0000 | 2002-406 |
|  | Item no.: 2002-407<br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A; light gray             |            | 2002-407 |
|  | Item no.: 2002-407/000-005<br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A; red            | /0000-0005 | 2002-407 |
|  | Item no.: 2002-407/000-006<br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A; blue           | /0000-0006 | 2002-407 |
|  | Item no.: 2002-408<br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A; light gray             |            | 2002-408 |
|  | Item no.: 2002-408/000-005<br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A; red            | /0000-0005 | 2002-408 |
|  | Item no.: 2002-408/000-006<br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A; blue           | /0000-0006 | 2002-408 |

|                                                                                    |                                                                                                                                   |                      |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 2002-409</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A; light gray                          | 2002-409             |
|    | <b>Item no.: 2002-409/000-005</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A; red                         | 2002-409<br>/000-005 |
|    | <b>Item no.: 2002-409/000-006</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A; blue                        | 2002-409<br>/000-006 |
|    | <b>Item no.: 2002-410</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A; light gray                         | 2002-410             |
|    | <b>Item no.: 2002-410/000-005</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A; red                        | 2002-410<br>/000-005 |
|    | <b>Item no.: 2002-410/000-006</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A; blue                       | 2002-410<br>/000-006 |
|    | <b>Item no.: 2002-423</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A; light gray   | 2002-423             |
|   | <b>Item no.: 2002-423/000-005</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A; red  | 2002-423<br>/000-005 |
|  | <b>Item no.: 2002-423/000-006</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A; blue | 2002-423<br>/000-006 |
|  | <b>Item no.: 2002-433</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 25 A; light gray                    | 2002-433             |
|  | <b>Item no.: 2002-434</b><br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 25 A; light gray                    | 2002-434             |
|  | <b>Item no.: 2002-435</b><br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 25 A; light gray                    | 2002-435             |
|  | <b>Item no.: 2002-436</b><br>Push-in type jumper bar; insulated; from 1 to 6; Nominal current 25 A; light gray                    | 2002-436             |
|  | <b>Item no.: 2002-437</b><br>Push-in type jumper bar; insulated; from 1 to 7; Nominal current 25 A; light gray                    | 2002-437             |
|  | <b>Item no.: 2002-438</b><br>Push-in type jumper bar; insulated; from 1 to 8; Nominal current 25 A; light gray                    | 2002-438             |
|  | <b>Item no.: 2002-439</b><br>Push-in type jumper bar; insulated; from 1 to 9; Nominal current 25 A; light gray                    | 2002-439             |
|  | <b>Item no.: 2002-440</b><br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 25 A; light gray                   | 2002-440             |
|                                                                                    | <b>Item no.: 2002-472</b><br>Staggered jumper; insulated; 2-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-    | 2002-472             |



mounted terminal blocks; light gray



**Item no.: 2002-473**

Staggered jumper; insulated; 3-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-473

**Item no.: 2002-473/011-000**

Ready-made staggered jumper; insulated; 2-way (1-3); Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray

/011-000

2002-473



**Item no.: 2002-474**

Staggered jumper; insulated; 4-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-474



**Item no.: 2002-475**

Staggered jumper; insulated; 5-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-475

**Item no.: 2002-475/011-000**

Ready-made staggered jumper; insulated; 3-way (1-3-5); Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray

/011-000

2002-475



**Item no.: 2002-476**

Staggered jumper; insulated; 6-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-476



**Item no.: 2002-477**

Staggered jumper; insulated; 7-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-477



**Item no.: 2002-477/011-000**

Ready-made staggered jumper; insulated; 1-3-5-7; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray

/011-000

2002-477



**Item no.: 2002-478**

Staggered jumper; insulated; 8-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-478



**Item no.: 2002-479**

Staggered jumper; insulated; 9-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-479

**Item no.: 2002-479/011-000**

Ready-made staggered jumper; insulated; 1-3-5-7-9; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray

/011-000

2002-479



**Item no.: 2002-480**

Staggered jumper; insulated; 10-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-480



**Item no.: 2002-481**

Staggered jumper; insulated; 11-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-481

**Item no.: 2002-481/011-000**

Ready-made staggered jumper; insulated; 1-3-5-7-9-11; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray

/011-000

2002-481



**Item no.: 2002-482**

Staggered jumper; insulated; 12-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray

2002-482

|                                                                                    |                                                                                                                                                                                                                       |                        |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
|    | <b>Item no.: 2006-499</b><br>Step-down jumper; insulated; from 6/4 mm <sup>2</sup> to 4/2.5/1.5 mm <sup>2</sup> ; Nominal current 32 A; light gray                                                                    | 2006-499               |
|    | <b>Item no.: 2009-412</b><br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black  | 2009-412               |
|    | <b>Item no.: 2009-414</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black | 2009-414               |
|    | <b>Item no.: 2009-416</b><br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black | 2009-416               |
|    | <b>Item no.: 2016-499</b><br>Step-down jumper; insulated; from 16/10 mm <sup>2</sup> to 10/6/4/2.5 mm <sup>2</sup> ; Nominal current 57 A; light gray                                                                 | 2016-499               |
|    | <b>Item no.: 210-103</b><br>Wire commoning chain; insulated; 50 connections; black                                                                                                                                    | 210-103                |
|    | <b>Item no.: 210-123</b><br>Wire commoning chain; insulated; 50 connections                                                                                                                                           | 210-123                |
| <b>plug</b>                                                                        |                                                                                                                                                                                                                       |                        |
|    | <b>Item no.: 2002-880</b><br>Empty component plug housing; 10.4 mm wide; 2-pole; Type 4; gray                                                                                                                         | 2002-880               |
| <b>General accessories</b>                                                         |                                                                                                                                                                                                                       |                        |
|  | <b>Item no.: 2002-880/1000-411</b><br>Component plug; 2-pole; with diode 1N4007; 10.4 mm wide; Operating temperature 85°C max.; gray                                                                                  | 2002-880<br>/ 1000-411 |
|  | <b>Item no.: 2002-880/1000-541</b><br>Component plug; 2-pole; LED (red); 10.4 mm wide; Operating temperature 85°C max.; gray                                                                                          | 2002-880<br>/ 1000-541 |
|  | <b>Item no.: 2002-880/1000-542</b><br>LED module; with red LED; 10.4 mm wide; 30 - 65 V; Operating temperature 85°C max.                                                                                              | 2002-880<br>/ 1000-542 |
|  | <b>Item no.: 2002-880/1000-836</b><br>Component plug; 2-pole; LED (red); 10.4 mm wide; Operating temperature 85°C max.; gray                                                                                          | 2002-880<br>/ 1000-836 |
| <b>ferrule</b>                                                                     |                                                                                                                                                                                                                       |                        |
|   | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white                            | 216-241                |
|   | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray                            | 216-242                |
|   | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red                                | 216-243                |
|   | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black                            | 216-244                |

|                                                                                    |                                                                                                                                                                                            |           |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
|    | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-246   |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | 216-262   |
|    | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | 216-263   |
|    | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | 216-264   |
|    | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | 216-266   |
| <b>End plate</b>                                                                   |                                                                                                                                                                                            |           |
|    | <b>Item no.: 2102-1391</b><br>End and intermediate plate; 0.8 mm thick; for 3-conductor terminal blocks; gray                                                                              | 2102-1391 |
|    | <b>Item no.: 2102-1392</b><br>End and intermediate plate; 0.8 mm thick; for 3-conductor terminal blocks; orange                                                                            | 2102-1392 |
| <b>Insulation stop</b>                                                             |                                                                                                                                                                                            |           |
|   | <b>Item no.: 2002-171</b><br>Insulation stop; 0.25 - 0.5 mm <sup>2</sup> ; 5 pieces/strip; light gray                                                                                      | 2002-171  |
|  | <b>Item no.: 2002-172</b><br>Insulation stop; 0.75 - 1 mm <sup>2</sup> ; 5 pieces/strip; dark gray                                                                                         | 2002-172  |
| <b>tools</b>                                                                       |                                                                                                                                                                                            |           |
|  | <b>Item no.: 210-658</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short                                                                           | 210-658   |
|  | <b>Item no.: 210-720</b><br>Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft                                                                                          | 210-720   |
| <b>Carrier rail</b>                                                                |                                                                                                                                                                                            |           |
|  | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm                                                       | 210-112   |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                                                                        | 210-113   |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                                                                         | 210-114   |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm                                                       | 210-115   |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                                                                       | 210-118   |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                                                     | 210-196   |

|                                                                                  |                                                                                                                                       |         |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                      | 210-197 |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored | 210-198 |

## Marking accessories

|                                                                                    |                                                                                                                                       |                   |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------|
|    | <b>Item no.: 2002-161</b><br>Adaptor                                                                                                  | 2002-161          |
|    | <b>Item no.: 2009-110</b><br>Marking strips; on reel; not stretchable; plain; snap-on type; white                                     | 2009-110          |
|    | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white               | 2009-115          |
|    | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | 2009-115 /000-002 |
|    | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | 2009-115 /000-006 |
|    | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | 2009-115 /000-007 |
|   | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | 2009-115 /000-012 |
|  | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; light green | 2009-115 /000-017 |
|  | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green       | 2009-115 /000-023 |
|  | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | 2009-115 /000-024 |
|  | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white          | 2009-145          |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | 2009-145 /000-002 |
|  | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; red    | 2009-145 /000-005 |
|  | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | 2009-145 /000-006 |

|                                                                                    |                                                                                                                                       |           |          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | /000-007/ | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange | /000-012/ | 2009-145 |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green  | /000-023/ | 2009-145 |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet | /000-024/ | 2009-145 |
|    | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                                     |           | 2009-191 |
|    | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                                     |           | 2009-192 |
|    | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                                     |           | 2009-193 |
|   | <b>Item no.: 2009-198</b><br>Adaptor                                                                                                  |           | 2009-198 |
|  | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card          |           | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                      | /000-002/ | 248-501  |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-005/ | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-006/ | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-007/ | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-012/ | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-017/ | 248-501  |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                       | /000-023/ | 248-501  |

|                                                                                    |                                                                                                                                                           |                      |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                                           | 248-501<br>/000-024  |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                        | 793-501              |
|    | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-002  |
|    | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-005  |
|    | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-006  |
|    | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-007  |
|    | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-012  |
|   | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-017  |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-023  |
|  | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                                                | 793-501<br>/000-024  |
|  | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white          | 793-5501             |
|  | <b>Item no.: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | 793-5501<br>/000-002 |
|  | <b>Item no.: 793-5501/000-005</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; red                                          | 793-5501<br>/000-005 |
|  | <b>Item no.: 793-5501/000-006</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; blue                                         | 793-5501<br>/000-006 |
|  | <b>Item no.: 793-5501/000-007</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; gray                                         | 793-5501<br>/000-007 |

**Item no.: 793-5501/000-012**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; orange

/000-012

793-5501

**Item no.: 793-5501/000-017**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; light green

/000-017

793-5501

**Item no.: 793-5501/000-023**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; green

/000-023

793-5501

**Item no.: 793-5501/000-024**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type; violet

/000-024

793-5501

**check****Item no.: 2002-511**Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole; 2,50 mm<sup>2</sup>; gray

2002-511

**Item no.: 2002-549**

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray

2002-549

**Item no.: 2002-552**Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 2,50 mm<sup>2</sup>; gray

2002-552

**Item no.: 2002-553**Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 2,50 mm<sup>2</sup>; gray

2002-553

**Item no.: 2002-554**Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 2,50 mm<sup>2</sup>; gray

2002-554

**Item no.: 2002-555**Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 2,50 mm<sup>2</sup>; gray

2002-555

**Item no.: 2002-556**Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 2,50 mm<sup>2</sup>; gray

2002-556

**Item no.: 2002-557**Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 2,50 mm<sup>2</sup>; gray

2002-557

**Item no.: 2002-558**Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 2,50 mm<sup>2</sup>; gray

2002-558

**Item no.: 2002-559**Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 2,50 mm<sup>2</sup>; gray

2002-559

**Item no.: 2002-560**Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 2,50 mm<sup>2</sup>; gray

2002-560

**Item no.: 2002-611**TOPJOB®S L-type test plug module; modular; 1-pole; 2,50 mm<sup>2</sup>; gray

2002-611

**Item no.: 2002-649**

TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray

2002-649

**Item no.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray

2009-174



Item no.: 2009-182  
Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

2009-182

Downloads  
Documentation  
Bid Text

|           |                 |          |
|-----------|-----------------|----------|
| 2102-5301 | docx<br>15.2 kB | Download |
|-----------|-----------------|----------|

|                                                  |                              |          |
|--------------------------------------------------|------------------------------|----------|
| Additional Information<br>Technical explanations | Apr 3, 2019<br>pdf<br>2.1 MB | Download |
|--------------------------------------------------|------------------------------|----------|

CAD/CAE - Smart Data  
CAD data

|                       |     |          |
|-----------------------|-----|----------|
| 3D Download 2102-5301 | URL | Download |
|-----------------------|-----|----------|

|                            |  |          |
|----------------------------|--|----------|
| EPLAN<br>EPLAN Data Portal |  | Download |
|----------------------------|--|----------|

Subject to changes.