




Data Sheet | Item Number: 2202-3231

Triple-deck terminal block; with push-button; Through/through/through terminal block; L/L/L; with marker carrier; suitable for Ex e II applications; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; Push-in CAGE CLAMP®; 2,50 mm²; gray

<https://www.wago.com/2202-3231>

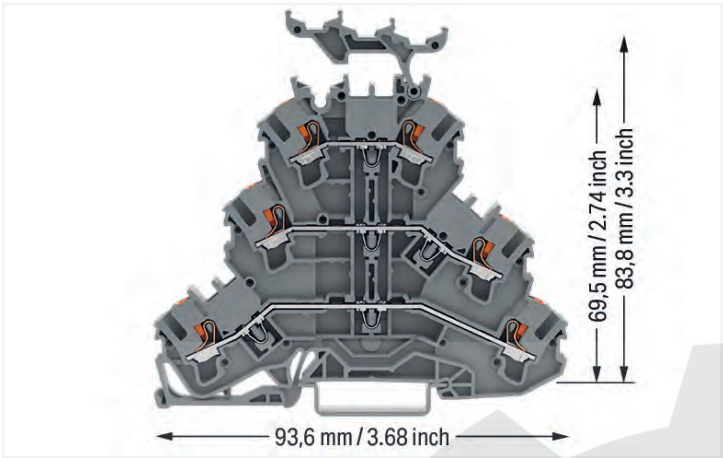

Color: gray

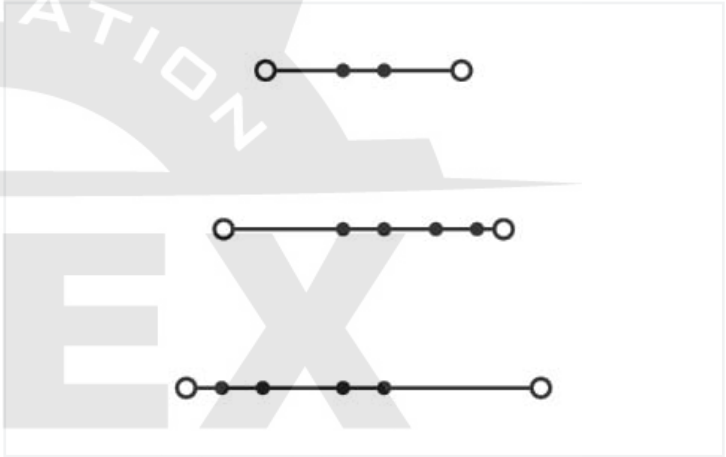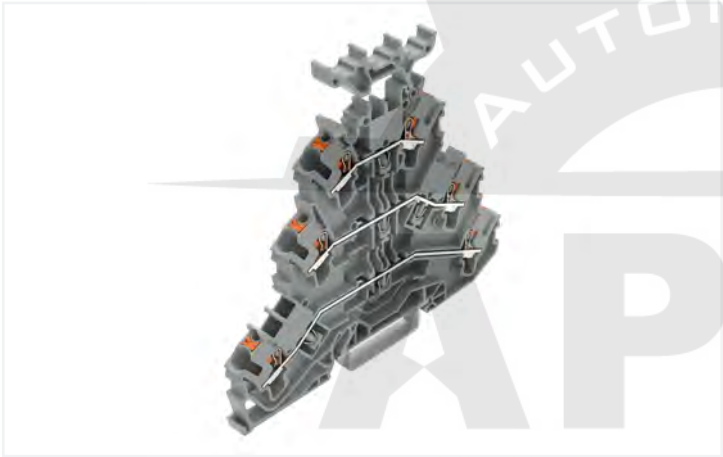

Similar to illustration

Electrical data			
Ratings per IEC/EN		Ex information	
Ratings per	IEC/EN 60947-7-1	Reference hazardous areas	See "Downloads – Documentation – Additional Information: Technical Section; Technical Explanations"
Nominal voltage (III/3)	500 V		
Rated impulse voltage (III/3)	6 kV	Rated voltage EN (Ex e II)	440 V
Rated current	22 A	Rated current (Ex e II)	19 A
Current at conductor cross-section (max.) mm²	26 A	Rated current (Ex e II) with jumper	17 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3		
Power loss			
Power loss, per pole (potential)	0.6437 W		
Rated current I _N for specified power loss	22 A		
Resistance value for specified, current-dependent power loss	0.00133 Ω		

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com

Connection data

Connection points	6
Total number of potentials	3
Number of levels	3
Number of jumper slots	6

Connection 1

Connection technology	Push-in CAGE CLAMP®
Number of connection points	3
Actuation type	Push-button
Connectable conductor materials	Copper
Nominal cross-section	2.5 mm²
Solid conductor	0.25 ... 4 mm² / 22 ... 12 AWG
Solid conductor; push-in termination	0.75 ... 4 mm² / 18 ... 12 AWG
Fine-stranded conductor	0.25 ... 4 mm² / 22 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm² / 22 ... 14 AWG
Fine-stranded conductor; with ferrule; push-in termination	1 ... 2.5 mm² / 18 ... 14 AWG
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches
Wiring direction	Front-entry wiring

Connection 2

Number of connection points 2	3
-------------------------------	---

Physical data

Width	5.2 mm / 0.205 inches
Height	93.6 mm / 3.685 inches
Depth from upper-edge of DIN-rail	83.8 mm / 3.299 inches

Mechanical Data

Potential marking	L/L/L
Mounting type	DIN-35 rail
Marking level	Center/side marking

Material Data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.346 MJ
Weight	18.2 g



Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data	
ETIM 8.0	EC000897
ETIM 7.0	EC000897
PU (SPU)	50 pcs
Country of origin	DE
GTIN	4066966194166
Customs tariff number	85369010000

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL-7901
CSA DEKRA Certification B.V.	C22.2	70173745
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-121544

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 2202-3231



Documentation

Additional Information
Technical Section

pdf
2142.18 KB



CAD/CAE-Data



CAD data

2D/3D Models
2202-3231

CAE data

EPLAN Data Portal
2202-3231

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 2002-3291

End and intermediate plate; 0.8 mm thick; gray



Item No.: 2002-3292

End and intermediate plate; 0.8 mm thick; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



Item No.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



Item No.: 210-508

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Item No.: 210-506

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-504

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored



Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-505

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

1.2.2 Ferrule

1.2.2.1 Ferrule



Item No.: 216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Item No.: 216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-262

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-263

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-264

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-246

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

1.2.2.1 Ferrule



Item No.: 216-266

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



1.2.5.1 Jumper

			
Item No.: 2002-400 Continuous jumper; 2-way; insulated; light gray	Item No.: 2002-423/000-006 Continuous jumper; from 1 to 3; insulated; blue	Item No.: 2002-423 Continuous jumper; from 1 to 3; insulated; light gray	Item No.: 2002-423/000-005 Continuous jumper; from 1 to 3; insulated; red
			
Item No.: 2002-424/000-006 Continuous jumper; from 1 to 4; insulated; blue	Item No.: 2002-424 Continuous jumper; from 1 to 4; insulated; light gray	Item No.: 2002-424/000-005 Continuous jumper; from 1 to 4; insulated; red	Item No.: 2002-406/020-000 Delta jumper; insulated; light gray
			
Item No.: 2002-410/000-006 Jumper; 10-way; insulated; blue	Item No.: 2002-410 Jumper; 10-way; insulated; light gray	Item No.: 2002-410/000-005 Jumper; 10-way; insulated; red	Item No.: 2002-402/000-006 Jumper; 2-way; insulated; blue
			
Item No.: 2002-402 Jumper; 2-way; insulated; light gray	Item No.: 2002-402/000-005 Jumper; 2-way; insulated; red	Item No.: 2002-403/000-006 Jumper; 3-way; insulated; blue	Item No.: 2002-403 Jumper; 3-way; insulated; light gray
			
Item No.: 2002-403/000-005 Jumper; 3-way; insulated; red	Item No.: 2002-404/000-006 Jumper; 4-way; insulated; blue	Item No.: 2002-404 Jumper; 4-way; insulated; light gray	Item No.: 2002-404/000-005 Jumper; 4-way; insulated; red
			
Item No.: 2002-405/000-006 Jumper; 5-way; insulated; blue	Item No.: 2002-405 Jumper; 5-way; insulated; light gray	Item No.: 2002-405/000-005 Jumper; 5-way; insulated; red	Item No.: 2002-406/000-006 Jumper; 6-way; insulated; blue
			
Item No.: 2002-406 Jumper; 6-way; insulated; light gray	Item No.: 2002-406/000-005 Jumper; 6-way; insulated; red	Item No.: 2002-407/000-006 Jumper; 7-way; insulated; blue	Item No.: 2002-407 Jumper; 7-way; insulated; light gray
			
Item No.: 2002-407/000-005 Jumper; 7-way; insulated; red	Item No.: 2002-408/000-006 Jumper; 8-way; insulated; blue	Item No.: 2002-408 Jumper; 8-way; insulated; light gray	Item No.: 2002-408/000-005 Jumper; 8-way; insulated; red
			
Item No.: 2002-409/000-006 Jumper; 9-way; insulated; blue	Item No.: 2002-409 Jumper; 9-way; insulated; light gray	Item No.: 2002-409/000-005 Jumper; 9-way; insulated; red	Item No.: 2002-440 Jumper; from 1 to 10; insulated; light gray
			
Item No.: 2002-433 Jumper; from 1 to 3; insulated; light gray	Item No.: 2002-434 Jumper; from 1 to 4; insulated; light gray	Item No.: 2002-435 Jumper; from 1 to 5; insulated; light gray	Item No.: 2002-436 Jumper; from 1 to 6; insulated; light gray
			
Item No.: 2002-437 Jumper; from 1 to 7; insulated; light gray	Item No.: 2002-438 Jumper; from 1 to 8; insulated; light gray	Item No.: 2002-439 Jumper; from 1 to 9; insulated; light gray	Item No.: 2002-480 Staggered jumper; 10-way; insulated; light gray
			
Item No.: 2002-481 Staggered jumper; 11-way; insulated; light gray	Item No.: 2002-482 Staggered jumper; 12-way; insulated; light gray	Item No.: 2002-473/011-000 Staggered jumper; 2-way; from 1 to 3; insulated; light gray	Item No.: 2002-472 Staggered jumper; 2-way; insulated; light gray



