



Data Sheet | Item Number: 221-482

COMPACT Splicing Connector; for all conductor types; for Ex e applications; max. 4 mm²; 2-conductor; with levers; transparent housing; Operating temperature (max.): 105 °C; 4,00 mm²; transparent

<https://www.wago.com/221-482>



Color: ☐ transparent

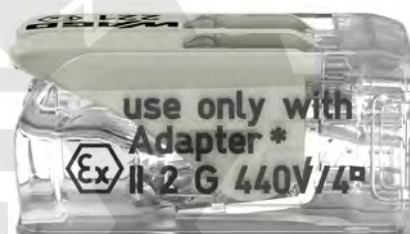

Dimensions in mm

Your benefits:

- Ease of use – pull the lever up, insert a conductor and push the lever back down
- Available as 2-, 3- and 5-wire connectors
- Easily terminate conductors from 0.14 to 4 mm²
- Connect solid, stranded and fine-stranded conductors
- Save time for installers and device manufacturers
- Quickly install devices with higher power consumption
- Safely install long cable runs with larger conductor cross sections
- Mounting carrier for installation conforms to standards
- Working voltages of 275 V or 440 V
- Custom carriers are possible
- ATEX (Ex 2 II G), IECEx (Ex eb IIC Gb) Zone 1, 2
- IECEX (Ex eb IIC Gb), American Ex (AEx eb IICGb) / Class 1, Zone 1

Notes

Safety information 1

The permissible operating voltage of the connector with carrier (440 V or 275 V) depends on the mounting type.

Safety information 2

Only approved in conjunction with a mounting carrier (221-501). Other carriers are possible, see certificate/file. The connectors must be installed in an enclosure meeting the requirements of a recognized protection type per EN 60079-0, Section 1 or EN 60079-31. When installing the connectors in an enclosure of protection type "eb" (increased safety) per EN 60079-7, the clearances and creepage distances of Table 2 for this standard must be observed. See point 1 for the use of accessories. The connectors can be used both in Group II and Group I, as the standard requirements are identical in this case. The use of these components requires a new assessment by a notified certification agency.

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60079-7
-------------	----------------

Ratings per UL 1059

Approvals per	UL 60079
Rated voltage UL (Use Group C)	440 V
Rated current UL (Use Group C)	20 A

Ex information

Ratings per	ATEX: PTB 18 ATEX 1019 U / IECEx: PTB 18.0045U (Ex eb IIC Gb)
-------------	---

Rated voltage EN (Ex e II)	440 V
----------------------------	-------

Rated current (Ex e II)	24.5 A
-------------------------	--------

Connection data

Connection points	2
-------------------	---

Total number of potentials	1
----------------------------	---

Connection 1

Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Fine-stranded conductor	0.14 ... 4 mm ² / 24 ... 12 AWG
Wiring direction	Side-entry wiring



Material Data	
Note (material data)	Information on material specifications can be found here
Color	transparent
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V2
Fire load	0.047 MJ
Actuator color	light gray
Weight	1.7 g

Commercial data	
eCl@ss 10.0	27-14-11-04
eCl@ss 9.0	27-14-11-04
ETIM 8.0	EC000446
ETIM 7.0	EC000446
PU (SPU)	1000 (100) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143837422
Customs tariff number	85369010000

Approvals / Certificates					
General approvals			Approvals for marine applications		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7827	LR Lloyds Register	EN 60998	LR22207029TA
ENEC 05 DEKRA Certification B.V.	EN 60998	71-113253 REV.1			
UL Underwriters Laboratories Inc.	UL 486C	E69654			

Approvals for hazardous areas		
Approval	Standard	Certificate Name
AEx Underwriters Laboratories Inc.	UL 60079	E185892 (AEx eb IIC resp. Ex eb IIC)
CCC CNEX	GB/T 3836.3	2020312313000184 (Ex eb IIC Gb, Ex eb I Mb)
EAC Brjansker Zertifizierungsstelle	TP TC 012/2011	RU C-DE.AM02. B.00127/19 (Ex e IIC Gb U)
IECEx Physikalisch Technische Bundesanstalt	IEC 60079-0	IECEx PTB 18.0045U (Ex eb IIC Gb, Ex eb I Mb)

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 221-482

↓

Documentation

System Description

System Description 221-482, 221-483, 221-485

pdf

1151.51 KB

↓

Bid Text

221-482

21.05.2019

docx

15.98 KB

↓

221-482

21.05.2019

xml

4.09 KB

↓

ausschreiben.de 221-482

↓

CAD/CAE-Data

CAD data

2D/3D Models 221-482

↓

CAE data

EPLAN Data Portal 221-482

↓

ZUKEN Portal 221-482


↓

1 Compatible Products


1.1 Optional Accessories

1.1.1 Mounting adapter

1.1.1.1 Mounting accessories



Item No.: 221-500/000-006
Mounting carrier; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting; blue



Item No.: 221-501
Mounting carrier; for Ex applications; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting; light gray

Installation Notes

Conductor termination



Strip conductor to 11 mm (0.43 inch).



Then, lower the lever to close the clamp.



Termination: Lift the lever to open the clamping unit and insert a stripped conductor.

Installation



Inserting a connector into the mounting carrier.



Removing a connector from the mounting carrier.



Removing a conductor.



Mounting type (440 V)
Using spacers between the connectors.



Mounting type (440 V)
Vertical mounting on DIN-35 rail



Mounting type (440 V)
Horizontal screw mounting on a flat surface



Mounting type (440 V)
Mounting the carrier via non-conductive screws.



Mounting type (275 V)
No spacers are used between the connectors.



Mounting type (275 V)
Mounting the carrier using conductive screws.

Testing



Easily test inserted connectors in the carrier –
however they are mounted.