



Data sheet | Item number: 286-665

Current flow monitoring module; Relay with 1 changeover contact (1u);
adjustable

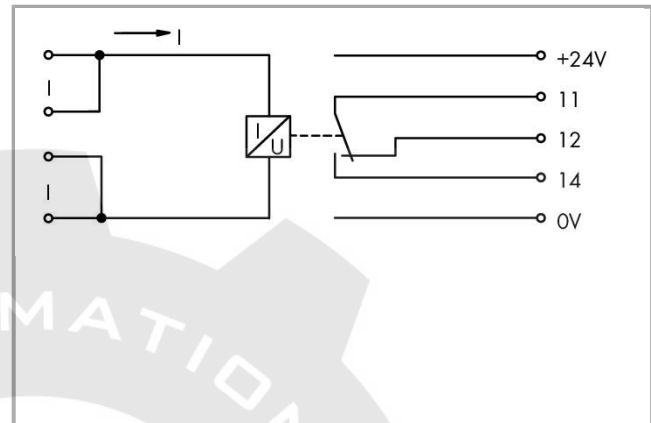


286-665

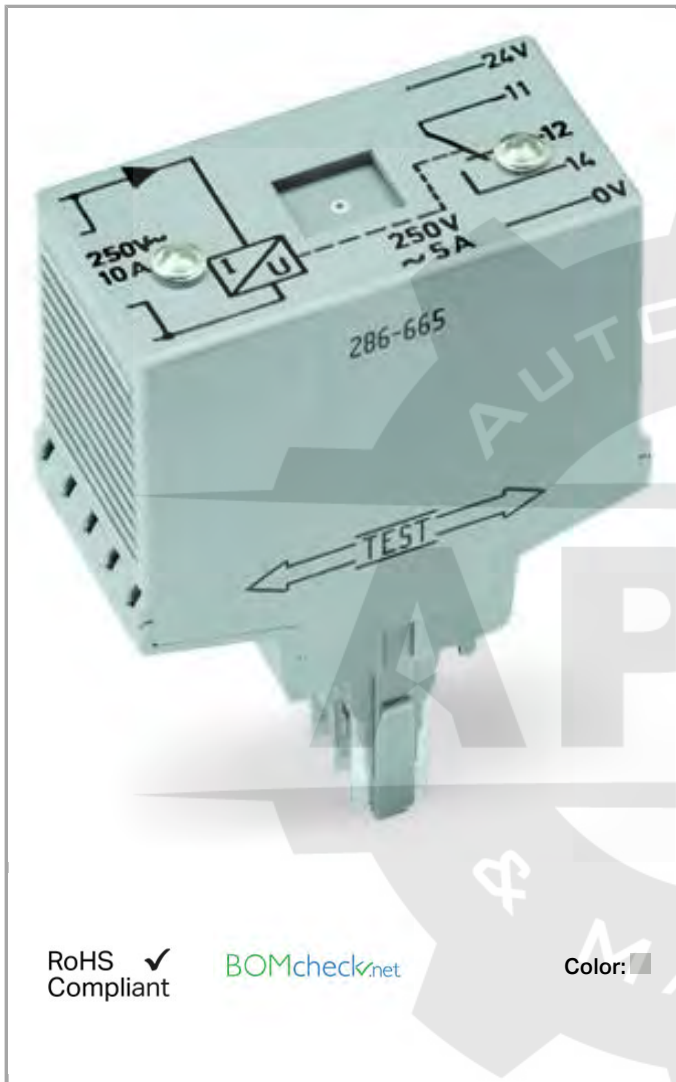

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

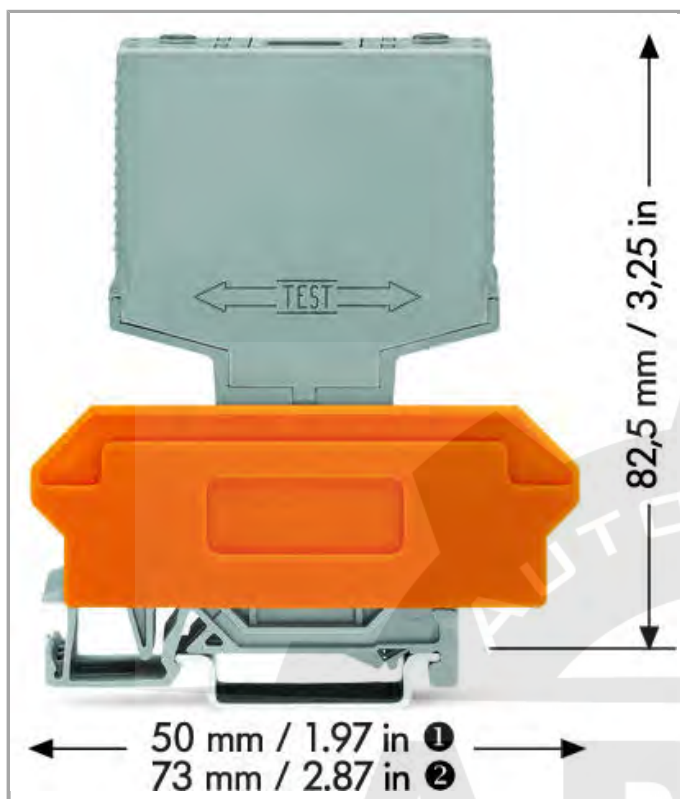

Data

Electrical data

Nominal operating voltage	DC 24 V
Current consumption at supply voltage	≤ 28 mA
Voltage drop at input	23 ... 850 mV
Max. measuring span	1 ... 10 AAC
Min. switching treshold (adjustable)	1 A
Response time	200ms
Number of changeover/switchover contacts	1
Number of break contacts/switch off contacts	1
Limiting continuous current	5 A
Max. switching voltage	AC 250 V
Max. switching power (resistive)	AC 1,250 VA
Status indication	LED red, Relay switched (Current < switching treshold)

Safety and protection:

Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Dielectric strength input/output (AC, 1 min)	1.5 kVrms

Mechanical data

Type of mounting	Pluggable module for carrier terminal blocks
Housing design	Pluggable module for terminal blocks

Material Data

Color	light gray
Fire load	0 MJ
Weight	58

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 40 °C
Surrounding air (storage) temperature	-40 ... 70 °C

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4050821254850
Customs Tariff No.	85364900990

Compatible products

General accessories

	Item no.: 280-629 Terminal block for pluggable modules; 20-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm ² ; CAGE CLAMP®	280-629
	Item no.: 280-639 Terminal block for pluggable modules; 10-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm ² ; CAGE CLAMP®	280-639
	Item no.: 280-765 Terminal block for pluggable modules; 20-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm ² ; CAGE CLAMP®	280-765

Marking accessories

	Item no.: 209-701 WSB marking card; as card; not stretchable; plain; snap-on type	209-701
	Item no.: 209-701/000-002 WSB marking card; as card; not stretchable; plain; snap-on type	209-701 /000-002
	Item no.: 209-701/000-005 WSB marking card; as card; not stretchable; plain; snap-on type	209-701 /000-005



Item no.: 209-701/000-006

WSB marking card; as card; not stretchable; plain; snap-on type

/000-006

209-701



Item no.: 209-701/000-007

WSB marking card; as card; not stretchable; plain; snap-on type

/000-007

209-701



Item no.: 209-701/000-012

WSB marking card; as card; not stretchable; plain; snap-on type

/000-012

209-701



Item no.: 209-701/000-017

WSB marking card; as card; not stretchable; plain; snap-on type

/000-017

209-701



Item no.: 209-701/000-023

WSB marking card; as card; not stretchable; plain; snap-on type

/000-023

209-701



Item no.: 209-701/000-024

WSB marking card; as card; not stretchable; plain; snap-on type

/000-024

209-701

Downloads

Documentation

Bid Text

286-665

Jan 15, 2016

doc
25.6 kB

Download

Interface-Bausteine mit Sonderfunktionen

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

Download

CAD/CAE - Smart Data

CAD data

3D Download 286-665

URL

Download

Subject to changes.