


Data sheet | Item number: 852-1322

Industrial managed switch - MAC Security; 8 - 10/100/1000 Mb/s RJ45 ports

www.wago.com/852-1322

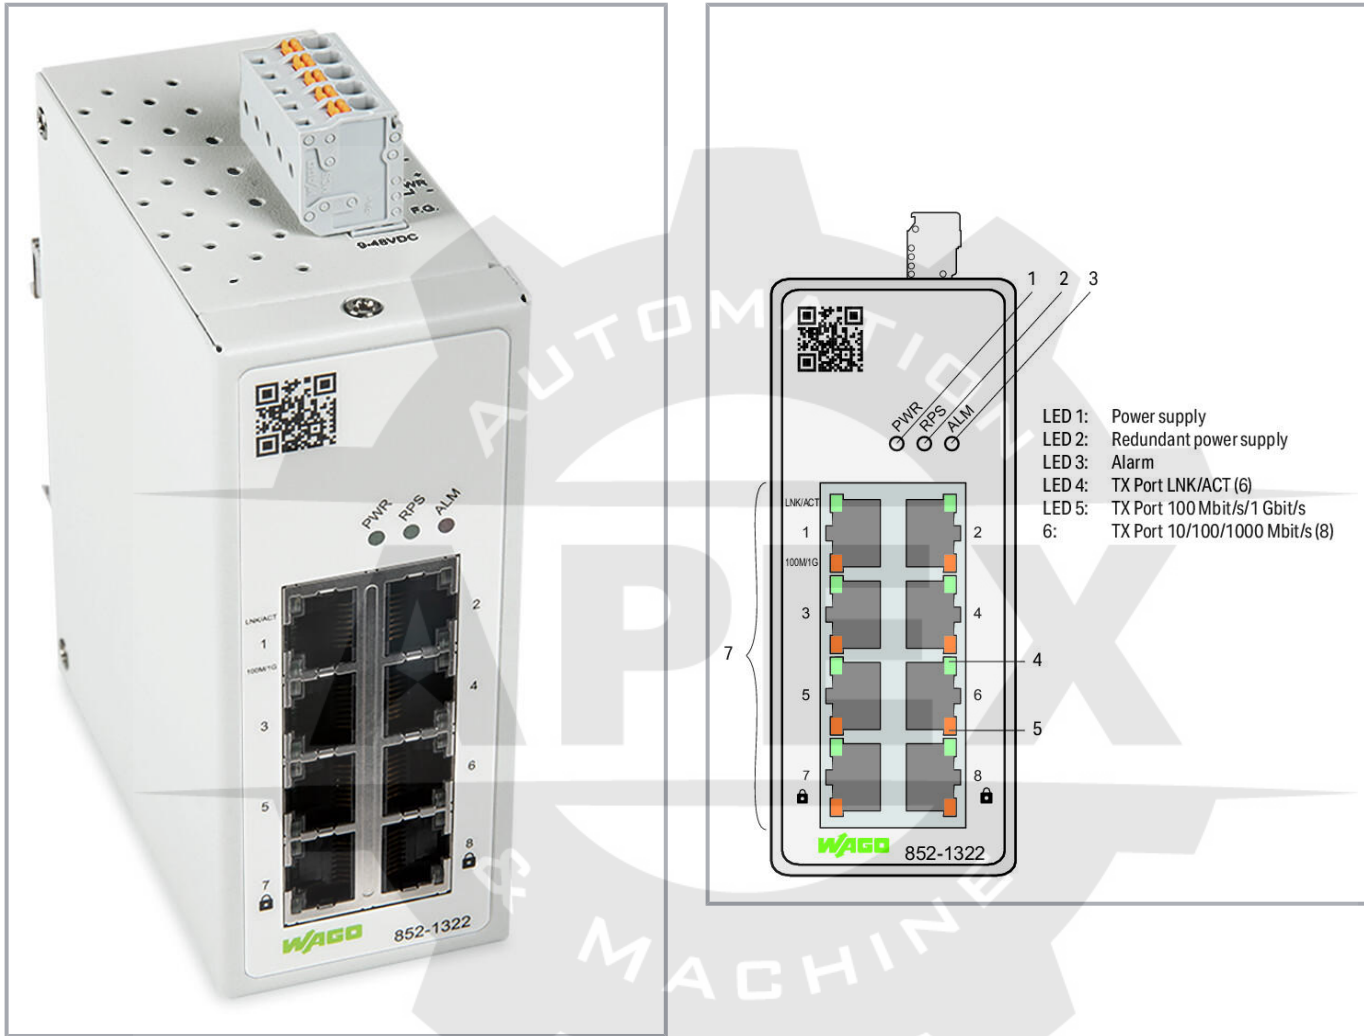

Item description

The 852-1322 Industrial Managed Switch is a configurable ETHERNET switch equipped with eight 10/100/1000BASE-T ports. Data encryption complies with IEEE802.1AE (MAC Security Standard) for communication via ports 7 and 8. This functionality, combined with compact dimensions, makes WAGO's managed switch ideal for retrofitting network security during operation of the automation system. The customer application remains unchanged. The optional authentication of the other participants in the network is port-specific in accordance with IEEE 802.1X and RADIUS server.

Packaged in a rugged housing, this switch offers a redundant power supply.

Features:

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



- Web-based (HTTP(S))
- Configuration and diagnostics via SNMPv3
- Redundant DC power supply
- Supply voltage range: 9 ... 48 VDC
- Full compliance with IEEE802.3, 802.3u, 802.3x, 802.3ab, 802.1p, 802.1X, 802.3az, 802.1AE standards
- Non-blocking, store-and-forward switching
- Auto-negotiation at all 10/100/1000BASE-T ports
- Auto-MDI/MDIX (crossover) at all 10/100/1000Base-T ports
- SNMP v1/v2c/v3

Data

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 1000BASE-T ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.1p Prioritization IEEE 802.1x Port Authentication IEEE 802.3az Energy Efficient Ethernet IEEE 802.1AE MAC Security
Redundancy function	Redundant DC power supply
Configuration options	Web-based (HTTP(S)) SNMPv1/v2c/v3
Diagnostics	Modbus TCP; Port status; Syslog; SNMP traps
MAC table (size)	16000 addresses
Supply voltage	9 ... 48 VDC
Power consumption without PoE	5.8 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/1000 Mbit/s
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; per port: LED (100M/1G, LNK/ACT) green: Status 100 Mbit/s/1 Gbit/s, LNK/ACT ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-435/001-000; included female

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

connector (MCS Connectors): 2231-105/026-000

Physical data

Width	45.3 mm / 1.783 inch
Height	110 mm / 4.331 inch
Depth	92 mm / 3.622 inch

Mechanical data

Weight	628 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 70 °C
Surrounding air temperature (storage)	-40 ... 80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 55011, 55024, 55032 (Class A + B), 61000-6-3, -4

Commercial data

Packaging type	BOX
Country of origin	TW
GTIN	4055143978163
Customs tariff number	8517620090

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 62368-1	E175199

Subject to changes. Please also observe the further product documentation!

Optional accessories

Cables and pluggable connectors

	Item no.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-976
	Item no.: 750-977/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22	www.wago.com/750-977/000-011
	Item no.: 750-977/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22	www.wago.com/750-977/000-012
	Item no.: 750-977/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22	www.wago.com/750-977/000-013
	Item no.: 750-977/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24	www.wago.com/750-977/000-021
	Item no.: 750-977/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24	www.wago.com/750-977/000-022
	Item no.: 750-978/000-011 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief	www.wago.com/750-978/000-011
	Item no.: 750-978/000-012 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief	www.wago.com/750-978/000-012
	Item no.: 750-978/000-013 Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief	www.wago.com/750-978/000-013
	Item no.: 750-978/000-021 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief	www.wago.com/750-978/000-021
	Item no.: 750-978/000-022 Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief	www.wago.com/750-978/000-022
	Item no.: 750-979/000-011 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief	www.wago.com/750-979/000-011
	Item no.: 750-979/000-012 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief	www.wago.com/750-979/000-012

Subject to changes. Please also observe the further product documentation!

	Item no.: 750-979/000-013 Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief	www.wago.com/750-979/000-013
	Item no.: 750-979/000-021 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief	www.wago.com/750-979/000-021
	Item no.: 750-979/000-022 Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief	www.wago.com/750-979/000-022
Interface module		
	Item no.: 289-195 Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection	www.wago.com/289-195
Power supplies		
	Item no.: 787-1602 EPSITRON® CLASSIC power supply; single-phase; output voltage 24 VDC; 1 A	www.wago.com/787-1602
	Item no.: 787-1606 EPSITRON® CLASSIC power supply; single-phase; output voltage 24 VDC; 2 A	www.wago.com/787-1606
	Item no.: 787-1622 EPSITRON® CLASSIC power supply; single-phase; output voltage 24 VDC; 5 A	www.wago.com/787-1622
	Item no.: 787-1623 EPSITRON® CLASSIC power supply; single-phase; output voltage 48 VDC; 2 A	www.wago.com/787-1623
	Item no.: 787-1632 EPSITRON® CLASSIC power supply; 1-phase; output voltage 24 VDC; 10 A	www.wago.com/787-1632
	Item no.: 787-1633 EPSITRON® CLASSIC power supply; 2-phase; output voltage 48 VDC; 5 A	www.wago.com/787-1633
	Item no.: 787-1635 EPSITRON® CLASSIC power supply; 2-phase; output voltage 48 VDC; 10 A	www.wago.com/787-1635

Downloads

Documentation

Manual

Managed Switch; MAC Security	V 1.0.0 May 28, 2020	pdf 3.2 MB	Download
------------------------------	-------------------------	---------------	----------

Bid Text

852-1322	docx 17.1 kB	Download
----------	-----------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



852-1322

xml
6.9 kB

[Download](#)

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

[Download](#)

System Description

Industrial Switches – General Product Information

pdf
2.0 MB

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-1322

URL

[Download](#)

Industrial-Managed-Switch; 8-Port 1000BASE-T; MAC Security

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.