



Data sheet | Item number: 885-306

Stud terminal block; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; 3 studs, M6

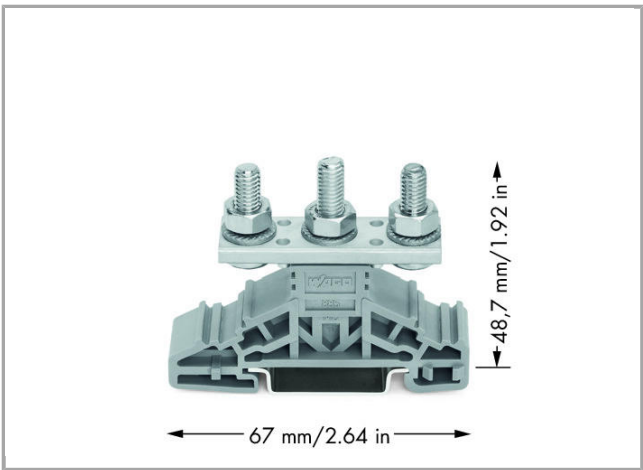

885-306

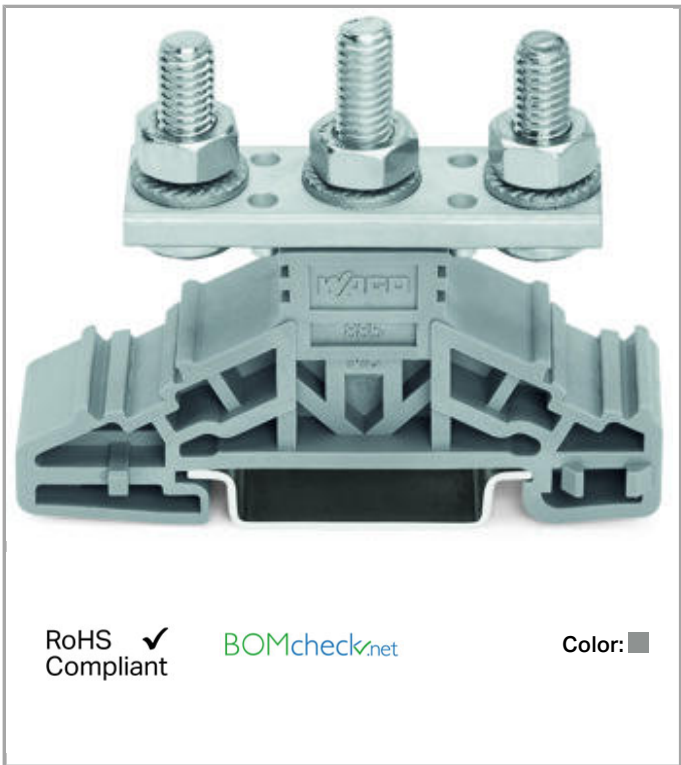

Data
Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated current	125 A

Connection data

Connection technology	Screw-clamp connection/Studs
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	2.5 ... 35 mm ² / 14 ... 2 AWG
Total number of connection points	3
Total number of potentials	1
Type of wiring	Front-entry wiring

Geometrical Data

Width	17.8 mm / 0.701 inch
Height from upper-edge of DIN-35 rail	48.7 mm / 1.917 inch
Depth	67 mm / 2.638 inch

Mechanical data

Tightening torque	3 ... 6 Nm
Type of mounting	DIN-35 rail
Marking level	Side marking

Material Data

Color	gray
Fire load	0.39 MJ
Weight	66.606 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
Country of origin	CN
GTIN	4050821049258
Customs Tariff No.	85369095990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL 6882
	CCA DEKRA Certification B.V.	EN 60947	2145295.01
	CSA DEKRA Certification B.V.	C22.2 No. 158	70038960

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH	UL 1059	E45172



Compatible products

Jumper



Item no.: 885-406
Assembled jumper bar; 2-way

885-406



Item no.: 885-426
Assembled jumper bar; 3-way

885-426



Item no.: 885-448
Step-down adjacent jumper bar; 1 level; from M8 to M6


885-448



Item no.: 885-470
Step-down adjacent jumper bar; 2 levels; from M10 to M6

885-470

N-busbar



Item no.: 885-566
Cover; 1 m long

885-566

End plate



Item no.: 885-526
Separator plate; 2 mm thick; 102.3 mm wide

885-526



Item no.: 885-546
Separator plate with jumper bar recess; 2 mm thick; 102.3 mm wide

885-546

General accessories



Item no.: 885-580
Clip; secures cover against slipping

885-580

Marking accessories



Item no.: 2009-110
Marking strips; on reel; not stretchable; plain; snap-on type

2009-110



Item no.: 2009-115
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115



Item no.: 2009-115/000-002
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-002



Item no.: 2009-115/000-006
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

2009-115

/000-006

	Item no.: 2009-115/000-007 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-007	2009-115
	Item no.: 2009-115/000-012 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-012	2009-115
	Item no.: 2009-115/000-017 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-017	2009-115
	Item no.: 2009-115/000-023 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-023	2009-115
	Item no.: 2009-115/000-024 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-024	2009-115
	Item no.: 2009-135 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type		2009-135
	Item no.: 2009-198 Adaptor		2009-198

Downloads

Documentation

Additional Information

pdf
2.1 MB

Download

CAD/CAE - Smart Data

CAD data

3D Download 885-306

URL

Download

Subject to changes.