



Data sheet | Item number: 885-310

Stud terminal block; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; 3 studs, M10

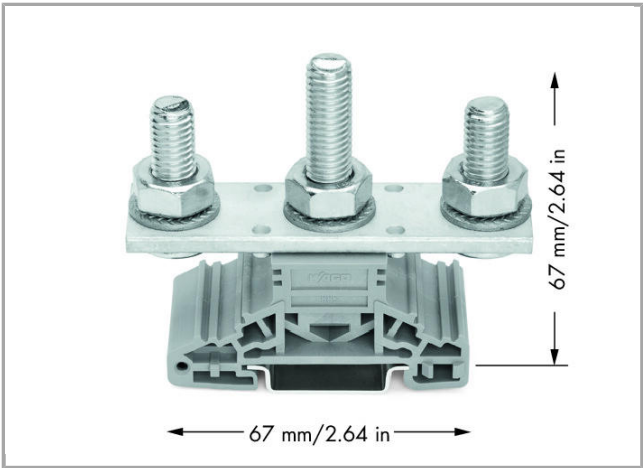

885-310

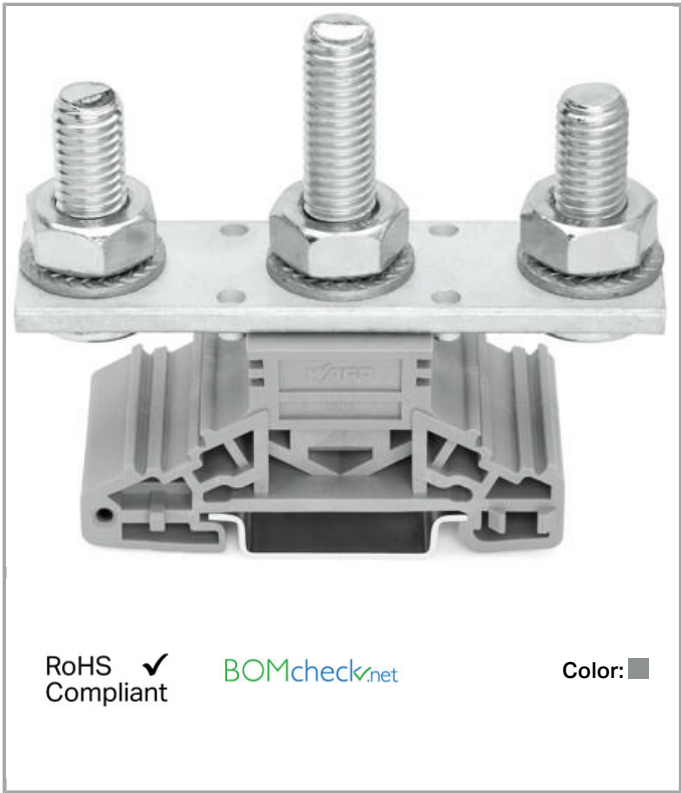

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 3)	1000 V
Rated impulse voltage (III / 3)	8 kV
Rated current	269 A

Connection data

Connection technology	Screw-clamp connection/Studs
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	6 ... 120 mm ² / 10 AWG ... 250 kcmil
Total number of connection points	3
Total number of potentials	1
Type of wiring	Front-entry wiring

Geometrical Data

Width	33.8 mm / 1.331 inch
Height from upper-edge of DIN-35 rail	66.7 mm / 2.626 inch
Depth	67 mm / 2.638 inch

Mechanical data

Tightening torque	10 ... 20 Nm
Type of mounting	DIN-35 rail
Marking level	Side marking

Material Data

Color	gray
Fire load	0.831 MJ
Weight	228.166 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
Country of origin	CN
GTIN	4050821049272
Customs Tariff No.	85369095990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL 6882
	CCA DEKRA Certification B.V.	EN 60947	2145295.01
	CSA DEKRA Certification B.V.	C22.2 No. 158	70038960

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH	UL 1059	E45172



Compatible products

Marking accessories

	Item no.: 2009-110 Marking strips; on reel; not stretchable; plain; snap-on type		2009-110
	Item no.: 2009-115 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type		2009-115
	Item no.: 2009-115/000-002 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-002	2009-115
	Item no.: 2009-115/000-006 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-006	2009-115
	Item no.: 2009-115/000-007 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-007	2009-115
	Item no.: 2009-115/000-012 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-012	2009-115
	Item no.: 2009-115/000-017 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-017	2009-115
	Item no.: 2009-115/000-023 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-023	2009-115
	Item no.: 2009-115/000-024 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	/000-024	2009-115
	Item no.: 2009-135 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type		2009-135
	Item no.: 2009-198 Adaptor		2009-198

General accessories

Item no.: 885-580 Clip; secures cover against slipping	885-580
--	---------



??

End plate

	Item no.: 885-530 Separator plate; 2 mm thick; 157 mm wide	885-530
	Item no.: 885-550 Seperator plate with jumper bar recess; 2 mm thick; 157 mm wide	885-550

Jumper

	Item no.: 885-410 Assembled jumper bar; 2-way	885-410
	Item no.: 885-430 Assembled jumper bar; 3-way	885-430
	Item no.: 885-470 Step-down adjacent jumper bar; 2 levels; from M10 to M6	885-470

N-busbar

	Item no.: 885-570 Cover; 1 m long	885-570
--	---	---------

Downloads

Documentation

Additional Information

pdf
2.1 MB

Download

CAD/CAE - Smart Data

CAD data

3D Download 885-310

URL

Download

Subject to changes.