

SIEMENS

Product data sheet

6SL3201-0BE14-3AA0

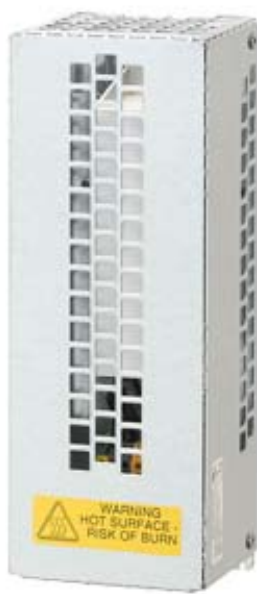


Fig. similar

SINAMICS BRAKING RESISTOR R=370OHM
P_RATED=75W P_MAX=1500W/12S/5% DUTY
STANDALONE

Electrical resistance / of the braking resistor	370 Ω
Active power drawn / rated value	0.075 kW
• maximum	1.5 kW
Version, electrical connection / for power cable	Terminal block
Connectable conductor cross-section / for power cable	2.5 mm ²
Design of the temperature switch	Normally closed contact
Input voltage / of the temperature switch / for AC / maximum	250 V
Input current / of the temperature switch / for AC / maximum	2.5 A
Connectable conductor cross-section / on the temperature switch / maximum	2.5 mm ²
Design of electrical connection / of the protective conductor connection	Yes
Design of the protective conductor connection / to housing	M4 screw

Protection class IP	IP20
Width	105 mm
Height	295 mm
Depth	100 mm
Net weight	1.48 kg

Further information[Information and download center for Industry Automation and Drives](#)[Technical documentation \(Motion Control\)](#)[Industry Mall \(online ordering system\)](#)[Service & Support \(FAQs, manuals, operating instructions, certificates, characteristics, ...\)](#)**last change:**

Mar 1, 2013