

VELLA 3" RESIDENTIAL DOWNLIGHT

VM060-VF62RA01

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:




DESCRIPTION

The VELLA-Residential series is ideal for precise spot lighting or accent lighting, offering an almost invisible light aperture. Its highly modular design includes numerous mounting rings in both round and square options, available in adjustable and fixed configurations with various wattages to suit different needs. Additionally, a honeycomb filter can be added to maximize visual comfort.

FEATURES

- Elegant & compact in its style, versatile in its using.
- Precise light control, 15°, 24°, 38°, 55° beam lens options.
- Numerous mounting rings with round & square and adjustable & fixed options.
- Super modular design, replaceable mounting ring, beam lens and anti-glare accessories without any need for tools.
- Standard Dry Rated, optional Damp or Wet Rated
- Trim finish options: Matte Black, Matte White
- UGR<19

SPECIFICATION

	VM060	
WATTAGE	10W	15W
LUMEN OUTPUT	918lm	1218lm
BEAM OPTICS	Narrow Spot 15°, Spot 24°, Flood 38°, Wide Flood 55°	
COLOR TEMP.	Static White: <input type="checkbox"/> 2700K, <input type="checkbox"/> 3000K, <input type="checkbox"/> 3500K, <input type="checkbox"/> 4000K, <input type="checkbox"/> Dim To Warm: 2000K-3000K	
COLOR QUALITY	80+/90+, 3-step SDCM	
INPUT WATTAGE	10W	15W
INPUT VOLTAGE	120/277V input, 50/60Hz	
POWER FACTOR	Greater than 0.9	
DIMMING TYPE	Triac dimming & 0-10V dimming range: 1%-100%	
CEILING THICKNESS	 $\frac{3}{64}" - \frac{25}{32}"$ (1mm-20mm) Spring clip	
INSTALLATION	New Construction, Remodel, IC Rated Housing	
ETL LISTINGS	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.	
WARRANTY	5 year limited warranty	
AMBIENT OPERATING TEMP.	-20°C to 40°C	
LUMEN MAINTENANCE	80% of initial lumens at 5000 hours (L80)	

1. Approximate lumen output based on 3000K performance, see photometric test results for additional information.

2. 20W Can be IC-Rated housing.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2025

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VELLA 3" RESIDENTIAL DOWNLIGHT

VM060-VF62RA01

By VONN Lighting

VONN

PROJECT:

TYPE:


CATALOG#:

DATE:


VM060	VF	6	2	-	-	-	-	-	-	-	-
Led Module	Trim	Dimensions of trim	Application	Trim Shape	Trim Style	Flangeless Trim	Safety Standard	Voltage	Lumen Output	Dimming Methods	Including Housing
VM060	VF	6 Nominal size: 60mm	2 Residential	RA Round Adjustable	01 Wide Frame Big Pinhole	NA Not Available	A American Standard	SV 120V	L08 800lm	V 0-10V	C New Construction
				RF Round adjustable	02 Deep Frame			MV 120-277V	L12 1200lm	T Triac	R Remodel
				SA Square adjustable	03 Inner					X 0-10V/Triac	H Housing
					04 Round Pinhole						

ACCESSORIES (TO BE ORDERED SEPARATELY)
FOR INSTALLATION CONSULT THE INSTRUCTION SHEET

OPTICAL ACCESSORY

 **HONEYCOMB FILTER**
VM060-H



 **SOFT LENS**
VM060-L



LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	0.95
3000K	1.00
3500K	1.03
4000K	1.06

CRI	MULTIPLIER
80+	1.23
90+	1.00

STANDARD TRIM	MULTIPLIER
VF62RA01 (Round adjustable)	1.00
VF62RA02 (Round adjustable)	0.99
VF62RA03 (Round adjustable)	1.25
VF62RA04 (Round adjustable)	0.5
VF62RA05 (Round adjustable)	0.5
VF62SA05 (Square adjustable)	0.6
VF62RF01 (Round adjustable)	0.7
VF62RF02 (Round adjustable)	1.2
VF62RF03 (Round adjustable)	1.22

Applying Lumen Multipliers to Calculate Delivered Lumens

Base Fixture Delivered Lumens (from PHOTOMETRIC DATA)	x	CCT Multiplier	x	CRI Multiplier	x	TRIM Multiplier	=	Delivered Lumens for Desired Fixture
STANDARD TRIM Example: VM060-VF62RF01 3500K 80+								
805.99 lm	x	1.03	x	1.23	x	0.7	=	714.77 lm

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)


***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2025

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VELLA 3" RESIDENTIAL DOWNLIGHT

VM060-VF62RA01

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:


DATE:

PHOTOMETRIC DATA (NON-DIMMING)


CCT (K)	CRI	LOAD (W)	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)
3000K	90	10W	15°	805	80	4384
			24°	918	91	2963
			38°	906	90	2262
			55°	847	84	1272
		15W	15°	1085	79	5859
			24°	1218	88	3933
			38°	1199	87	2993
			55°	1119	81	1658

Above test data is based on **Round Adjustable** trim with 3000K 90CRI LED.


VM060-VF62RA01 10W

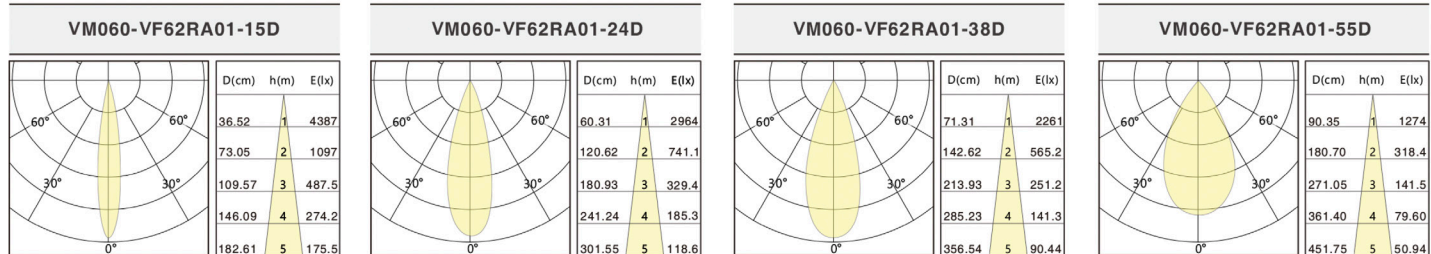

VM060-VF62RA01 15W

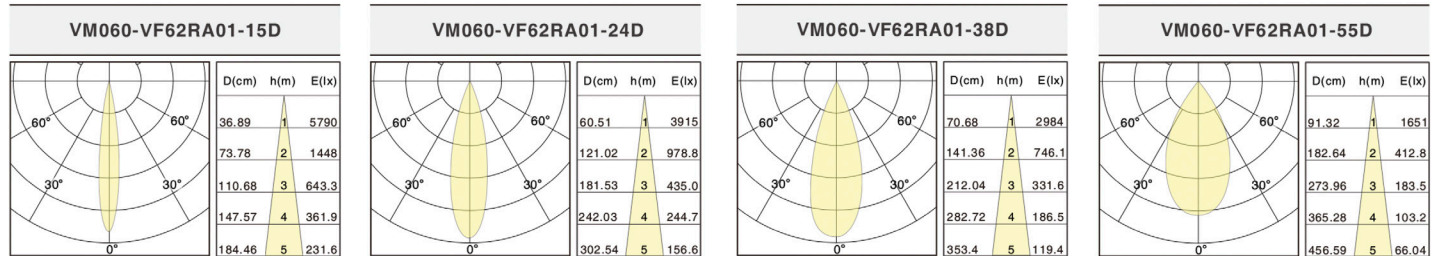

Above test data is based on **Round Adjustable** trim with 3000K 90CRI LED.

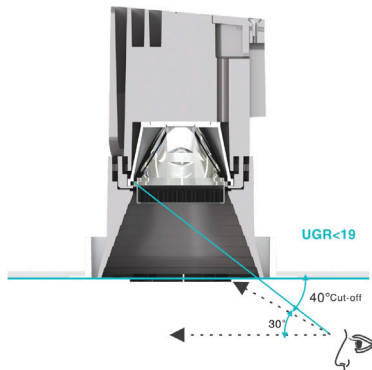

Anti-Glare

In the glare free angle, there is no direct view of the LED and the visible part of the reflector produces practically no glare at all. This zone offers very high visual comfort.

Anti-Glare Accessory



Honey comb



Soft lens

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2025

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VELLA 3" RESIDENTIAL DOWNLIGHT

VM060-VF62RA01

By VONN Lighting

VONN

PROJECT:


TYPE:

CATALOG#:

DATE:

DIMENSION

LED Module



Trim For Residential Series



	VF62RA01  3 15/32" (88mm) 2 5/64" (75mm)		VF62RF01  3 15/32" (88mm) 2 5/64" (75mm)
	VF62RA02  3 15/32" (88mm) 2 5/64" (75mm)		VF62RF02  3 15/32" (85mm) 2 5/64" (75mm)
	VF62RA03  3 11/32" (85mm) 2 5/64" (75mm)		VF62RF03  3 11/32" (85mm) 2 5/64" (75mm)
	VF62RA04  2 5/64" (75mm) 2 43/64" (68mm)		VF62SA04  2 5/64" (75mm) 2 43/64" (68mm)
	VF62RA05  2 5/64" (75mm) 2 43/64" (68mm)		VF62SA05  2 5/64" (75mm) 2 43/64" (68mm)

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2025

VELLA 3" RESIDENTIAL DOWNLIGHT

VM060-VF62RA01

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:

INSTALLATION




REMODEL


INSTALLATION

1. Direct connection with installed housing.
2. Operation temperature: -20°C - 40°C.

DIMENSION FOR REMODEL MOUNTED DRIVER

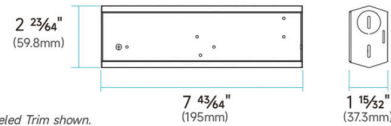

Note: Total height varies depending on trim, Beveled Trim shown.
Minimum height: 3 29/32" (99mm)
Maximum height: 4 5/64" (124.2mm)

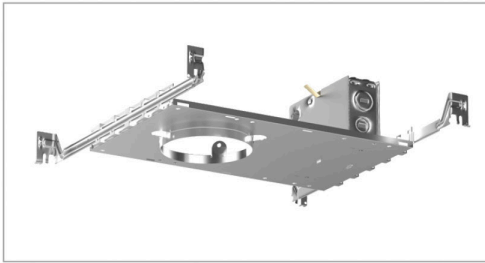


NEW CONSTRUCTION

INSTALLATION

1. Non-IC rated housings must be kept at a minimum of 3" away from insulation.
2. Fixture includes adjustable bar hangers (14"-25") for wood joist or t-bar ceiling installations.
3. Bar hangers can be installed in either direction.
4. Operation temperature: -20°C - 40°C.

DIMENSION

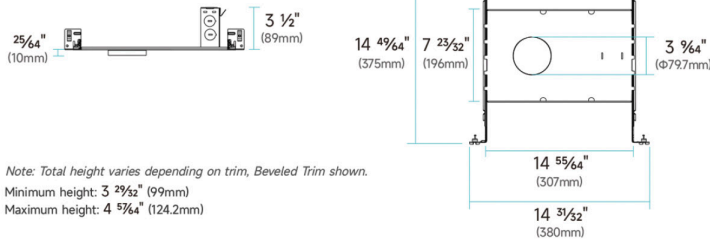

Note: Total height varies depending on trim, Beveled Trim shown.
Minimum height: 3 29/32" (99mm)
Maximum height: 4 5/64" (124.2mm)




IC RATED HOUSING

INSTALLATION

1. ETL Listed for direct contact with insulation.
2. Fixture includes adjustable bar hangers (14"-25") for wood joist or t-bar ceiling installations.
3. Bar hangers can be installed in either direction.
4. Operation temperature: -20°C - 40°C.

DIMENSION

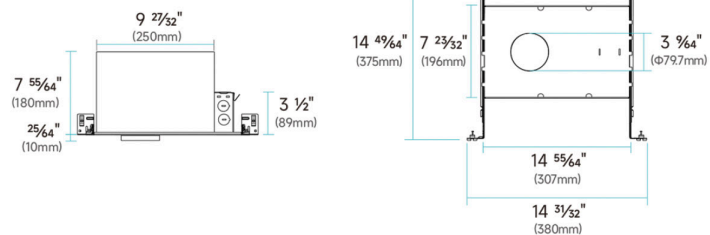

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2025

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

