

STANDARD SERIES SLIM HEAD By VONN Lighting

VTSHSL110BL



PROJECT:


TYPE:

CATALOG#:

DATE:



DIMENSIONS

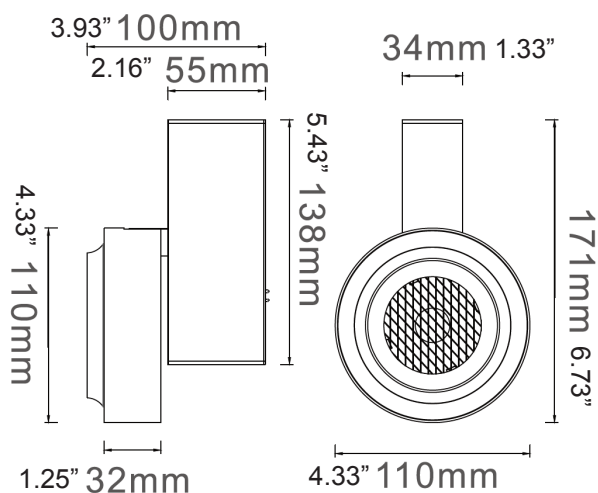

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSHSL110BL	L: 110MM x W: 110MM x H: 30MM (L: 4.33" x W: 4.33" x H: 1.18")	20W	2700K/3000K/4000K	840Lm	>90	20/30/40/60D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)


***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


DESCRIPTION

Standard Series Slim Head with three different beam angles obtained by means of refractive or hybrid units. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation. External dimming interface with Triac, 0/1-10V, Dali.


PHOTOMETRICS




h(m)	E(lx)	Φ(m)
1	7179	Φ0.34
2	1795	Φ0.69
3	797	Φ1.03
4	448	Φ1.38
5	287	Φ1.72



h(m)	E(lx)	Φ(m)
1	3431	Φ0.66
2	857	Φ1.33
3	381	Φ2.00
4	214	Φ2.66
5	137	Φ3.33



h(m)	E(lx)	Φ(m)
1	5456	Φ0.43
2	1364	Φ0.87
3	606	Φ1.30
4	341	Φ1.74
5	218	Φ2.17



h(m)	E(lx)	Φ(m)
1	1531	Φ1.03
2	382	Φ2.07
3	170	Φ3.11
4	95	Φ4.14
5	61	Φ5.18