

STANDARD SERIES SLIM HEAD By VONN Lighting

VTSHSL70BL



PROJECT:


TYPE:

CATALOG#:

DATE:



DIMENSIONS

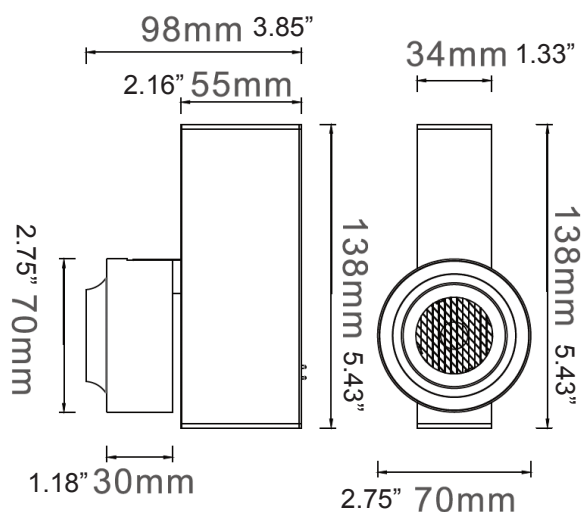


DESCRIPTION

Standard Series Slim Head with three different beam angles obtained by means of refractive or hybrid units. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation. External dimming interface with Triac, 0/1-10V, Dali.


PHOTOMETRICS

18°




h(m)	E(lx)	Φ(m)
1	2133	Φ0.48
2	533	Φ0.96
3	237	Φ1.45
4	133	Φ1.93
5	85	Φ2.42

36°



h(m)	E(lx)	Φ(m)
1	1373	Φ0.77
2	343	Φ1.54
3	152	Φ2.31
4	85	Φ3.09
5	54	Φ3.86

24°



h(m)	E(lx)	Φ(m)
1	1915	Φ0.62
2	478	Φ1.24
3	212	Φ1.87
4	119	Φ2.49
5	76	Φ3.12

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSHSL70BL	L: 70MM x W: 70MM x H: 30MM (L: 2.76" x W: 2.76" x H: 1.18")	10W	2700K/3000K/4000K	450Lm	>90	24/36/48D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

