

LED CURVE SERIES SLIM HEAD

By VONN Lighting

VTSHSL70D9BL / VTSHSL90D9BL / VTSHSL110D9BL



PROJECT:

TYPE:

CATALOG#:


DATE:




DESCRIPTION

Available in three sizes, each offering different beam angles achieved through refractive or hybrid units. The junction arm is integrated into the spotlight's body to keep the barrel perfectly centered on the track, preventing any imbalance in suspended track versions. The junction allows for 360° rotation, providing full flexibility. Additionally, the fixture includes an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

PHOTOMETRICS

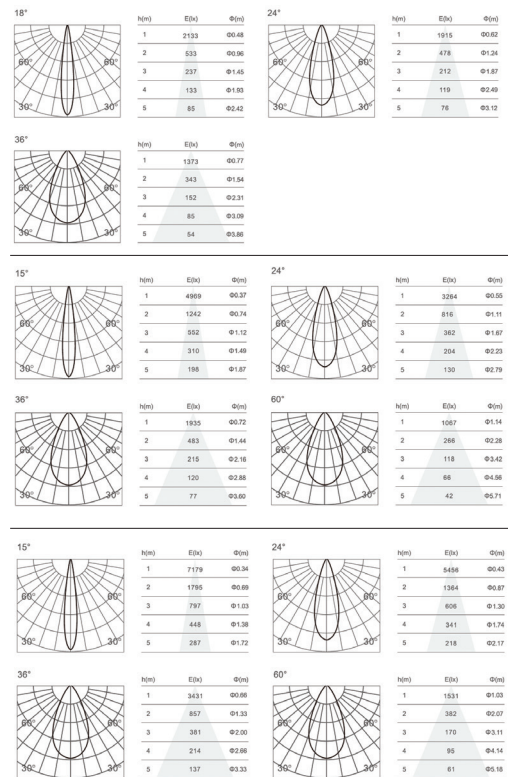

DIMENSIONS

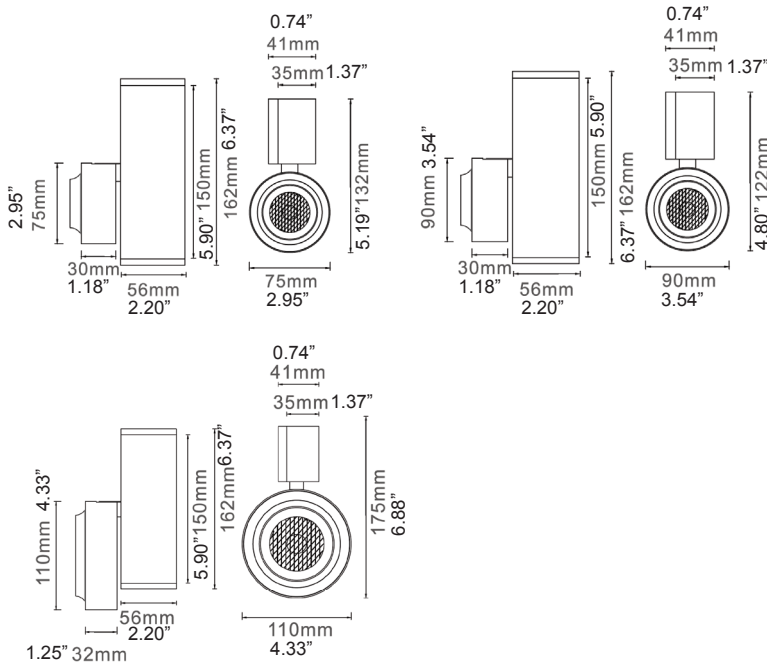

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSHSL70D9BL	L: 70MM x W: 70MM x H: 30MM (L: 2.76" x W: 2.76" x H: 1.18")	10W	2700K/3000K/4000K	450Lm	>90	24/36/48D
VTSHSL90D9BL	L: 90MM x W: 90MM x H: 30MM (L: 3.54" x W: 3.54" x H: 1.18")	15W	2700K/3000K/4000K	670Lm	>90	20/30/40/60D
VTSHSL110D9BL	L: 110MM x W: 110MM x H: 30MM (L: 4.33" x W: 4.33" x H: 1.18")	20W	2700K/3000K/4000K	840Lm	>90	20/30/40/60D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

