LYRA / ORION WALL WASHER By VONN Lighting

VUTH20GW1200

PROJECT:	TYPE:	CATALOG#:	DATE:




DESCRIPTION


- Wall washer
- 60°x25°x75° beam angle
- Black
- 1200mm
- 20W
- 2700K/3000K/4000K
- Ra90


FEATURES


• Material:	AL6063-T5,spraying surface
• Coating:	Black (RAL9005)
• Size:	600mm,1000mm,1200mm optional
• IP grade:	IP20
• CCT:	2700K,3000K,4000K optional
• CRI:	90
• SDCM:	<3 Step (ANSI)
• Beam angle:	60°x 25°x 75°
• Light efficiency:	83 LM/W
• Input voltage:	DC24V-48V,DC48V
• Lighting direction:	Downward
• Dimming method:	Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
• Application:	Indoor
• Certification:	CE, UKCA, ROHS, Reach
• Warranty:	5 years

DIMENSIONS

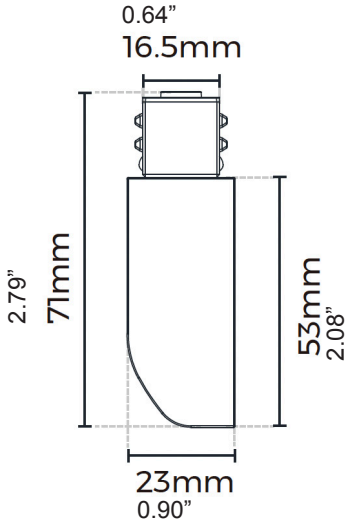

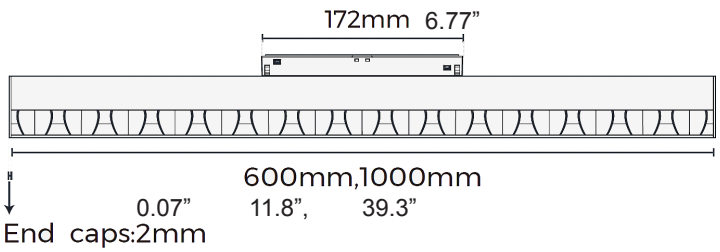

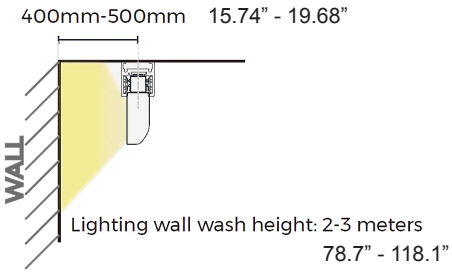

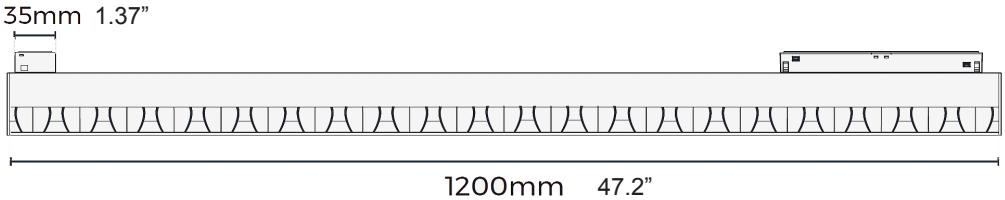

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

LYRA / ORION WALL WASHER By VONN Lighting

VUTH20GW1200


PROJECT:	TYPE:	CATALOG#:	DATE:

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20GW1200	600mm [1.97ft]	48VDC / 24-48VDC	10W	>90	60° x 25° x 75°	2700K	750 [380LM/ft]
						3000K	770 [390LM/ft]
						4000K	830 [420LM/ft]
	1000mm [3.28ft]	48VDC / 24-48VDC	15W		60° x 25° x 75°	2700K	1140 [347LM/ft]
						3000K	1160 [354LM/ft]
						4000K	1250 [380LM/ft]
	1200mm [3.94ft]	48VDC	20W		60° x 25° x 75°	2700K	1510 [380LM/ft]
						3000K	1540 [390LM/ft]
						4000K	1660 [420LM/ft]

Note:
1. The output data is based on the testing result of Ra90, 4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

PHOTOMETRICS

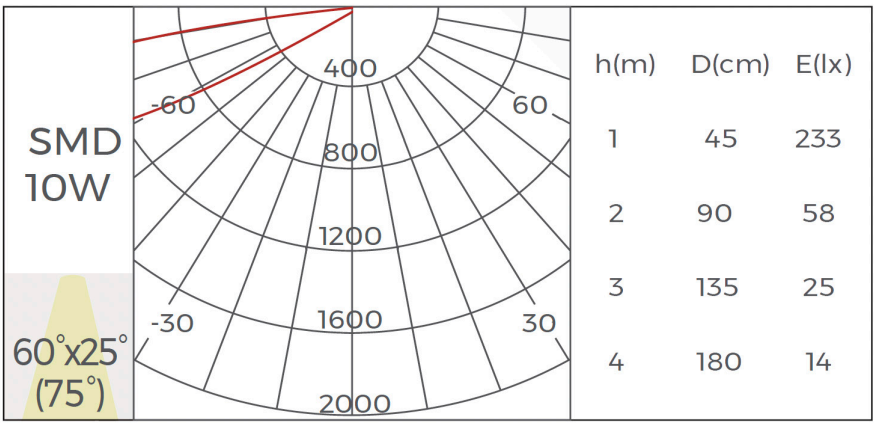

h(m)	D(cm)	E(lx)
1	45	233
2	90	58
3	135	25
4	180	14

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.