

**500-1DN****500-2DN****500-3DN****Drawer Warmers**

500-1DN



500-3DN



500-2DN



• Halo Heat . . . a controlled, uniform heat source that gently surrounds foods for better appearance, taste, and longer holding life.

- Product moisture is retained without adding water.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Extra large pans for additional capacity.
- Can be built into cabinets or counters. Built-in trim kits are available.
- Stackable design.

**Short Form Spec**

Alto-Shaam drawer warmer is constructed with a non-magnetic stainless steel exterior and removable stainless steel drawer rail supports. Each drawer includes one (1) full-size (GN 1/1) 12" x 20" x 6" (305mm x 508mm x 152mm) stainless steel pan. The warmer is controlled by an ON/OFF power switch; up and down arrow buttons with a temperature range of 60°F to 200°F (16°C to 93°C); heat indicator light; temperature display button, and digital display.

- Model 500-1DN:** One drawer warmer, narrow design
- Model 500-2DN:** Two drawer warmer, narrow design
- Model 500-3DN:** Three drawer warmer, narrow design



ANSI/NSF 4

**Factory Installed Options**

- Electrical Choices
  - 120V
  - 208-240V
  - 230V
- Drawer Choices (order per drawer)
  - Non-Vented, Standard
  - Vented, Optional (5014561)

**Additional Features**

- Stack units without additional hardware
- Individual or stacked units can be mounted on:
  - 3" (76mm) Casters and Caster Stand Assembly
  - 5" (127mm) Casters and Caster Stand Assembly
  - 6" (152mm) Leg Stand Assembly





W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.  
 Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only  
 www.alto-shaam.com



# 500-1DN, 500-2DN, 500-3DN

## Drawer Warmers

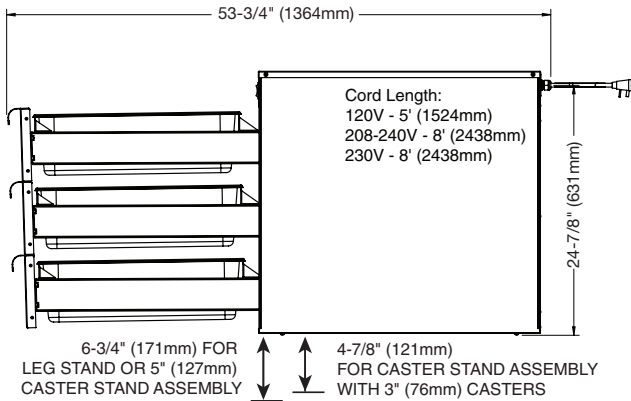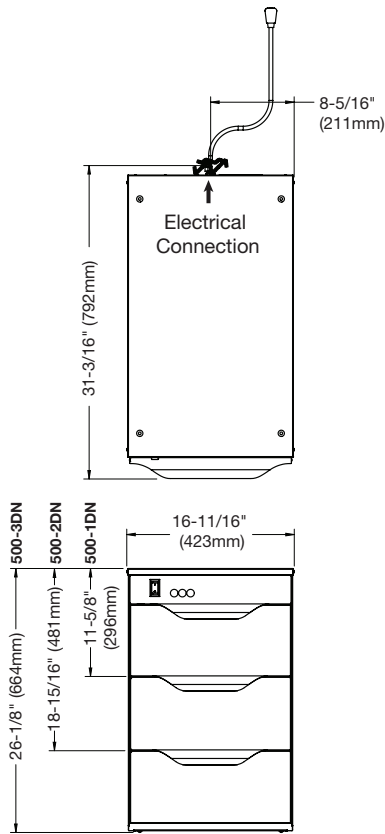

Dimensions H x W x D
<b>500-1DN exterior:</b> 11-5/8" x 16-11/16" x 31-3/16" (296mm x 423mm x 792mm)
<b>500-2DN exterior:</b> 18-15/16" x 16-11/16" x 31-3/16" (481mm x 423mm x 792mm)
<b>500-3DN exterior:</b> 26-1/8" x 16-11/16" x 31-3/16" (664mm x 423mm x 792mm)
Pan size: (each drawer) 12" x 20" x 6" (305mm x 508mm x 152mm) GN 1/1
<b>Cut out dimensions:</b> (for units with built-in trim) Add 3/4" (19mm) to unit height and 1-1/2" (38mm) to unit width

Electrical						
V	Ph	Hz	A	kW		
120	1	50/60	5.3	0.64		NEMA 5-15P 15A, 125V plug
208-240	1	50/60	2.7	0.64		NEMA 6-15P 15A, 250V plug
230	1	50/60	2.6	0.59		Plugs rated 250V
						CEE 7/7 CH2-16P
						BS 1363
						AS/NZS 3112

Product Capacity
41 lbs (19 kg) maximum • each drawer (34 baked potatoes, 50 dinner rolls)

Weight (est.)			
	500-1DN	500-2DN	500-3DN
<b>Net:</b>	67 lb (30 kg)	100 lb (45 kg)	130 lb (59 kg)
<b>Ship:</b>	75 lb (34 kg)	112 lb (51 kg)	145 lb (66 kg)
<b>Carton dimensions:</b> (L x W x H)			
	33" x 21" x 15" (838mm x 533mm x 381mm)	33" x 21" x 22" (838mm x 533mm x 559mm)	33" x 21" x 29" (838mm x 533mm x 737mm)

Installation Requirements
Drawer warmer must be installed level, and must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Clearance Requirement (for ventilation)
Minimum: 3" (76mm) at the back, 2" (51mm) at the top, and 1" (25mm) at both sides. On-site venting for proper airflow must also be provided for built-in counter installations.

Accessories	
Built-in Trim Kit	
<input type="checkbox"/> 500-1DN	5015148
<input type="checkbox"/> 500-2DN	5015150
<input type="checkbox"/> 500-3DN	5015154

Caster Stand Assembly	
<input type="checkbox"/> with 5" (127mm) casters	55534
<input type="checkbox"/> with 3" (76mm) casters	5010921
<input type="checkbox"/> Leg Stand Assembly	55535
<input type="checkbox"/> Perforated Pan Grid, 12" x 20" (305mm x 508mm)	16642



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.  
Phone: 262.251.3800 800.558.8744 U.S.A./Canada Fax: 262.251.7067 800.329.8744 U.S.A. only  
www.alto-shaam.com