







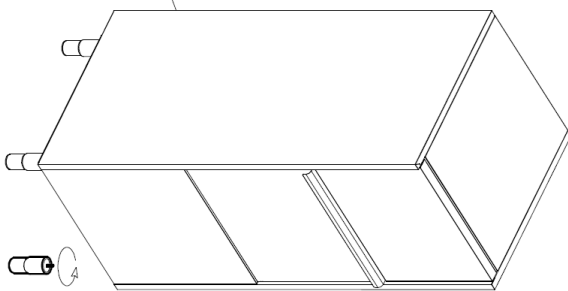
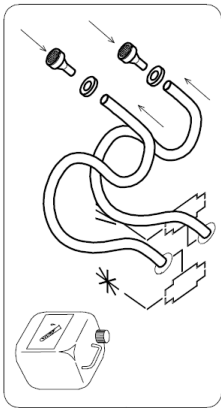
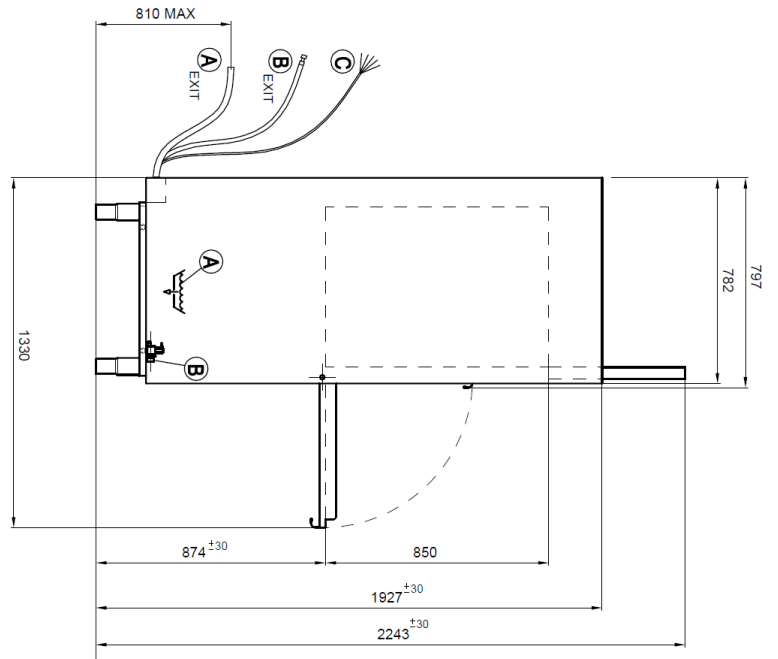
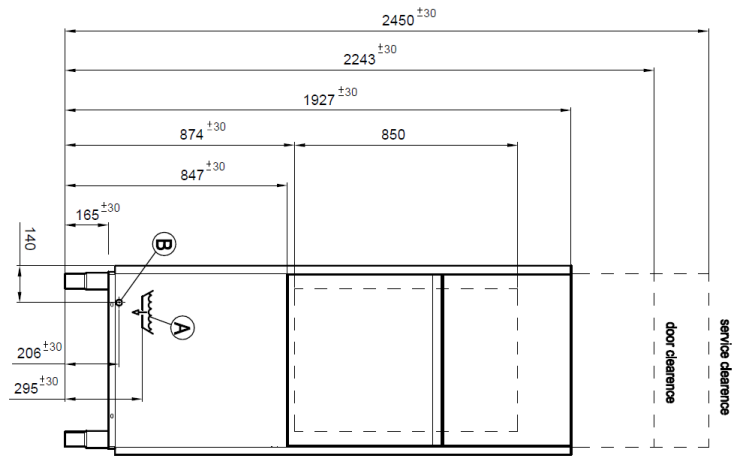
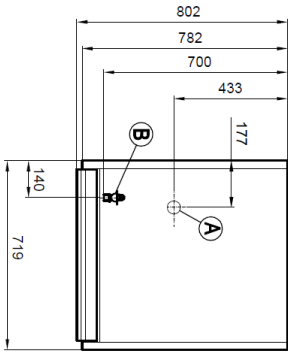


↘	Model	EW 3103	
	Code Production	LP513EWNZDD	
Interface :			
			
↕	Overall Dimension (Width-Depth-Height) *open	<i>mm</i>	719 x 782(*1330)x1927(*2243)
	Packaging Dimension (WxDxH)	<i>mm</i>	870x890x2200
	Gross weight	<i>Kg</i>	183
	Net weight	<i>Kg</i>	173
	Volume	<i>mc</i>	1,70
□	Rack size	<i>mm</i>	560x630
	Max door /hood opening	<i>mm</i>	850
	Max glasses/plate Height	<i>mm</i>	800
	General construction		double skin
	Door/hood Construction		double skin
↘	Tank construction		fully deep drawn
	Tank volume	<i>liter</i>	37
	Tank heating element	<i>W</i>	3.000
	Tank surface strainers		stainless steel
⚙️	Wash pump type		double flow
	Wash pump power	<i>W</i>	1.500
	Wash temperature	<i>°C</i>	60 (60-65)
↘	Boiler type		without pressure
	Boiler volume	<i>liter</i>	12
	Back-flow system		break tank
	Boiler heating element	<i>W</i>	6.000
⚙️	Rinse booster pump		YES
	Rinse booster pump power	<i>W</i>	200
	Rinse temperature	<i>°C</i>	80 (80-85)
	Rinse water consumption	<i>Liter /rack</i>	3
	Optimal external water pressure	<i>bar</i>	1 - 6
🚰	Drain system		deep drain
	Drain filter		double filter
	Drain pump		standard built in
▶	Rinse aid dispenser		YES
	Detergent dispenser		YES
⚙️	Wash cycle	<i>sec</i>	120 - 240 - 360 - 720
	Self cleaning cycle		YES
⚡	Electric Power	<i>W</i>	7.500
	Electric Connection	<i>V - ph - Hz</i>	400V 3N 50Hz
	Fuse	<i>A</i>	16
▶	Steel generic basket	<i>N°1</i>	41305
	Electric cable		YES
	Drain hose		YES
	Fill hose		YES

A		Ø 50mm M	A EXIT		Ø 35 mm M
B		G 3/4" M	B EXIT		G 3/4" F
C		Power supply	E		Steam exhaust



4 X

Installation layout		Utensil washer		LP5SP 00	
Designed by:	MAPIERI	Date:	12.10.2018	Code:	
Determination:			Rev.:		

