

SELF CONTAINED

# VIEW-VS SERIES

DUAL TEMP VARIABLE SPEED ISLAND CABINETS





ENHANCED ENERGY EFFICIENCY  
& VERSATILITY

**HUSSMANN**  
By  **austral**

**microSC**<sup>™</sup>

## PRODUCT BENEFITS

- High vision dual temperature merchandiser with glass push-pull lids for greater customer interaction and product visibility
- Ergonomic design for easy product access
- Flexible shelving configurations to optimise merchandising
- Best visual impact for products with energy efficient LED lighting
- Low Total Energy Consumption to save on total energy costs
- Product temperature compliance tested
- Designed for modular configurations to suit many store formats
- Small footprint with maximised display area
- Reinforced shelving to suit varied product weight
- Environmentally sustainable design using natural refrigerant
- Adjustable feet for easy levelling installation
- Easy plug-in on-site installation
- Low reflective E-coated glass for improved product visibility and temperature control
- Flexible dual temperature cabinet (LT and MT) that easily changes from freezer to chiller to provide optimised merchandising to meet customer demand
- Bottom front drainage opening for easy cleaning

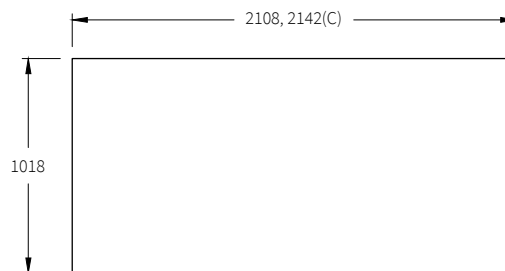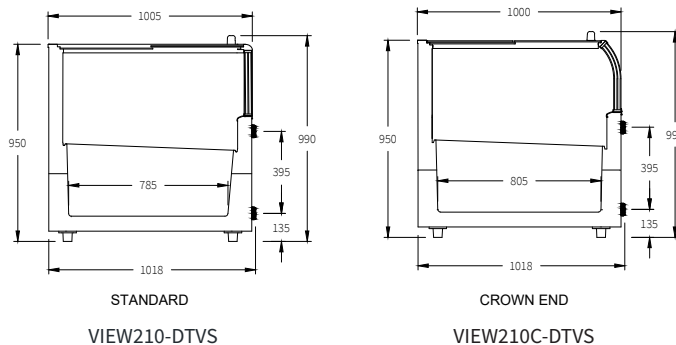

## STANDARD FEATURES

- External and internal food grade plasticised metal sheet finish
- Single horizontal front and rear mounted remote controlled colour adjustable LED lights (white/pink)
- Rubber bumper (black)
- Static refrigeration system with copper evaporator
- Digital controller with temperature display
- Ventilated condensing unit
- Variable speed compressor (inverter)
- Glass push-pull lids
- Automatic hot-gas defrost installed
- Four dividers and four shelves provided for each 2100 section
- Refrigerant: R290
- EC fan motors

## CUSTOMISATIONS

### Shelving & Base Shelf

- Additional shelves and dividers
- Baskets

### Lighting

- Additional rear mounted LED lighting available



### Other

- Castors
- Zinc coated steel kickplate
- Rear metal joining kit for island configurations
- Alternative bumper colour options available
- External and internal colours available on request

### Energy & Sustainability

- Modbus ready

TECHNICAL DATA			
CODE	Standard Depth 1018mm Standard Height 990mm	VIEW210-DTVS	VIEW210C-DTVS
Total Length (mm)		2108	2142
Net Volume (L)		672	672
Display Area (m <sup>2</sup> )		1.65	1.66

TEMPERATURE CLASS	
3M1	3L1
 (-1 °C to +5 °C)	 (-18 °C to -15 °C)

#### Additional Information

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

**NOTE:** We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.

## Australia Head Office

66 Glendenning Road Glendenning, NSW 2761 Australia

ph. +612 8805 0400

w. www.hussmann.com.au

# HUSSMANN

By 