



PHOENIKS

FLEXICOMBI CLASSIC 20.1 GAS

MODEL NO: FKG201R_CL

MKN combi steamer FlexiCombi 20 tray GN 1/1 or 20 FlexiRack® (530 x 570 mm) with manual operation system.


Product Advantages:

- FlexiRack® – 50% more cooking capacity (= save time and energy).
- ClimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity.
- Up to 100 individual cooking programmes can be stored in up to 6 steps.
- 316 S 11 durable hygienic cooking chamber.
- EasyLoad crosswise insertion.
- EasyIn roll-in system for transport trolley
- racks to compensate for any unevenness of the floor up to 10 mm.
- Handshower.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system (safe, easy, economical).
- USB interface.
- 3 years warranty parts and labour.

Capacity: Meals per day	150 - 300 (GN 1/1)
	150 - 400 (FlexiRack)

Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

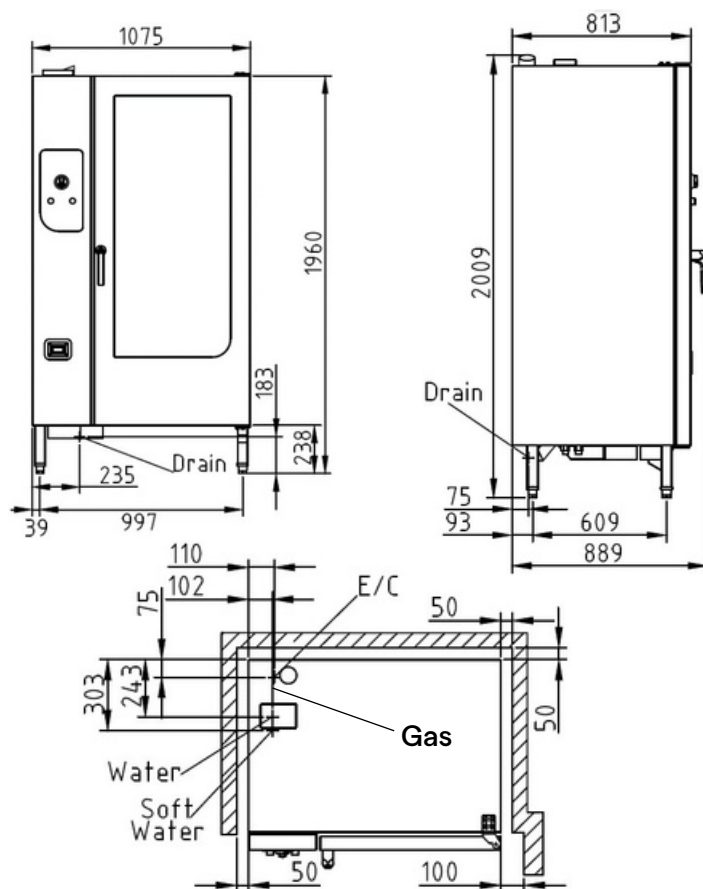

Technical Data:

Width x Height x Depth (mm):	1075 x 1960 x 813
Connected load (gas) (MJ/h):	129.6
Voltage (V) / EC:	240 1 phase AC
Recommended fuses (A):	1 x 10
Frequency range (Hz):	50
Soft Water connection:	DN 20 (R ¾" inside)
Water connection:	DN 20 (R ¾" inside)
Waterpressure (kPa):	200 - 600 (2 - 6 bar)
Drain connection:	DN 50
FlexiRack® (530 x 570 mm):	20 (max. 65 mm deep)
Gastronorm 1/1 (530 x 325 mm):	20 (max. 65 mm deep)
Plates Ø 28 cm on FlexiRack® grids:	80
Plates Ø 32 cm – plate trolley :	80
Material housing:	1.4301
Material cooking chamber:	1.4404
Gross weight (kg):	375
Heat emission latent (W):	6480
Heat emission sensitive (W):	5400
Type of protection:	IPX 5



INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058



phoeniks.com.au

P- 1300 405 404

E- contact@phoeniks.com.au