

RANGE

MI - 60/70/90/110

CODE

MACROOOO850

MODEL

BRT3PBTSP

FUNCTION

Refrigerated Bases

ITEM

3 door chilled counter -15-20°C without worktop



RANGE	CODE	MODEL	FUNCTION
MI - 60/70/90/110	MACROOOO850	BRT3PBTSP	Refrigerated Bases

ITEM

3 door chilled counter -15-20°C without worktop



TECHNICAL SPECIFICATIONS

RANGE:	-10/-20
WIDTH (mm):	1600
DEPTH (mm):	650
HEIGHT (mm):	610
WEIGHT (Kg):	158
VOLUME (m ³):	0.92
EL. POWER (kW):	0.5
VOLTAGE:	VAC230
FREQUENCY (Hz):	50Hz
INTERNAL DIM. (mm):	1204x550x615H
EXTERNAL MATERIAL:	304
INTERNAL MATERIAL:	304
GROSS CAPACITY (L):	228
OPERATING MODE:	Fan-assisted
DOORS:	3
STANDARD EQUIPMENT:	n. 3 Plastic-coated Grid GNI/I
DEFROST TYPE:	Hot gas
REFRIGERANT POWER:	520
ENERGY CLASS: D	GAS TYPE: R290/3
REFRIGERANT QUANTITY (g):	100
NOISE LEVEL:	53
ENERGY PER YEAR:	2597
CLIMATE CLASS:	5 +40°C 40%

DESCRIPTION


Refrigerated cupboard (-15-20°C) without worktop for countertop installation of MI 60, 70 and 90 series cooking elements. 3 doors. AISI 304 stainless steel, monocoque structure. Energy efficiency class D. Insulation thickness 50 mm (CFC and HCFC free). Ventilated refrigeration. Automatic defrosting. Defrosting water evaporation. Removable condensing unit. R290 refrigerant gas. Reversible door. Tool-free easy-to-replace magnetic seal. Bottom with radiused corners. Corrosion-resistant evaporator. Height adjustable feet. Standard supply: 1 GN I/I grille per door. Digital remote control thermostat.



RANGE	CODE	MODEL	FUNCTION
MI - 60/70/90/110	MACROOOO850	BRT3PBTSP	Refrigerated Bases

ITEM

3 door chilled counter -15-20°C without worktop

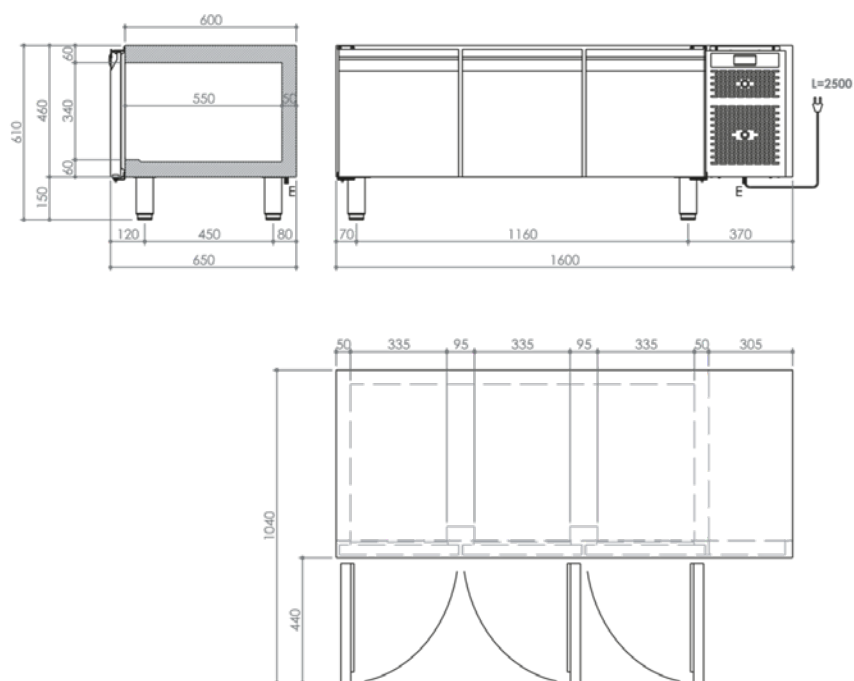

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC230 50Hz

Type of electrical plug:



MARENO ALI Group Srl Società a Socio Unico:
Via Conti Agosti, 231 - 31010 Marenò di Piave (TV)
Capitale Sociale 50.000.000,00 i.v.

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice.

LAST UPDATE:

6/11/2025